
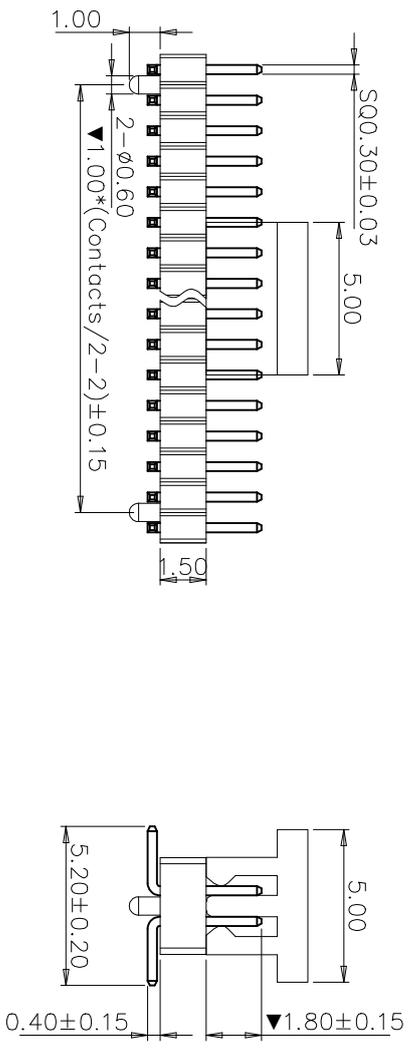
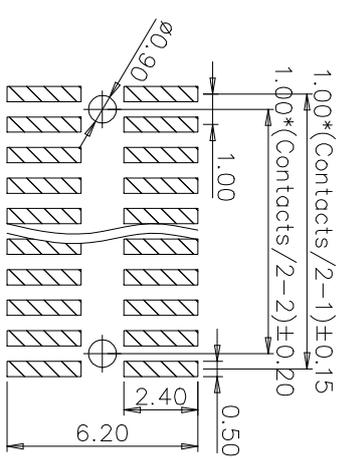


REVISION DATA				
SYM	ECN	DESCRIPTION	DATE	APPROVED

Technical Data
 Contact: brass JIS C2700(Cuzn35)
 Contact plating: see ordering information
 Insulator: black glass filled polyester UL94V-0
 Current rating: 0.75Amps
 Contact resistance: 20mΩ max.
 Insulation resistance: 1000MΩ min. at 100V
 Withstanding Voltage: 300V AC/minute
 Operating temperature: -55°C to +105°C
 Soldering temperature: 260°C±5° 5S
 Critical Dimensions: ▼

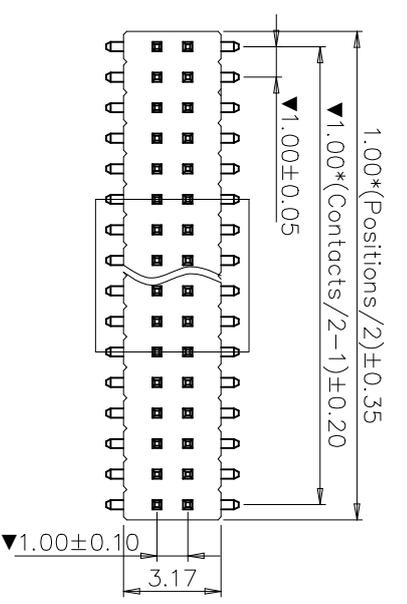

Ordering information
QCD2 **15** **1** **-P** **XX** **X** **X** **D** **07**

High Option 15: H=1.5mm	No. of Positions 06-100	Plating Option A: G/F B: Au30" C: Au10" D: Au10p" S: Sn120p" Z: Special (Underline option is standard)	Insulator Material Option C: BK-PAGT F: BK-LGP G: BK-PAGT S: Special (Underline option is standard)	Type Option A: Normal B: With Peg C: With Cap D: With Peg & Cap	Serial No. 01-999
----------------------------	----------------------------	--	---	---	----------------------

Packing	TOLERANCE:
1. General	ANGLE ±2°
2. Tape&Reel	X.XXX ±0.05
3. Tube	X.XX ±0.20
4. Tray	X.X ±0.30
5. Other	X. ±0.40

natconn® 广东纳特康电子股份有限公司
 GUANGDONG NATCONN ELECTRONIC CO.,LTD

PROJECTION	TITLE:
DATE: 2019/03/18	1.00*1.00mm Pin Header
DRAWN: 唐建平	Dwg1 RowSMT H=1.5
CHECKED	CUSTOMER: N/A
APPROVED	PARTNO.: N/A
	CUSTOMER P/N: N/A
	DRAWING NO.: QCD215IPD07
	SIZE: A4
	UNIT: mm
	SCALE: 1:1
	SHEET: 1/1