

CUSTOMER COPY







REVISION DATA				
SYM	ECN	DESCRIPTION	DATE	APPROVED

Technical Data

Contact: brass JIS C3604(CuZn39Pb5)  
black glass filled polyester,  
PPS-GF30-FR,UL94V-0

Insulator: see ordering information

Plating: 40V RMS/60V DC  
Current rating: 4mA max.  
Voltage rating: 1000MΩ min. at 100V AC  
Contact resistance: 1pF max.  
Insulation resistance: 1000V RMS min.  
Capacitance: 2.5KgF/contact min.  
Dielectric strength: -40°C to +105°C  
Sleeve retention force: 245±5 SS  
Operating temperature: Critical Dimensions: ▼

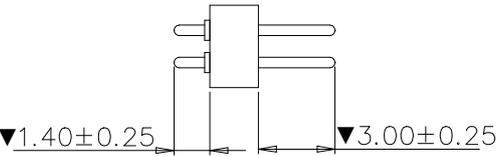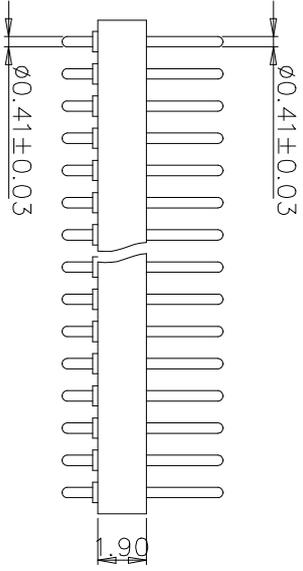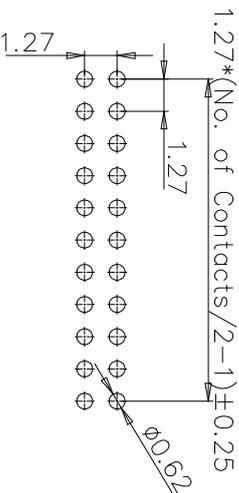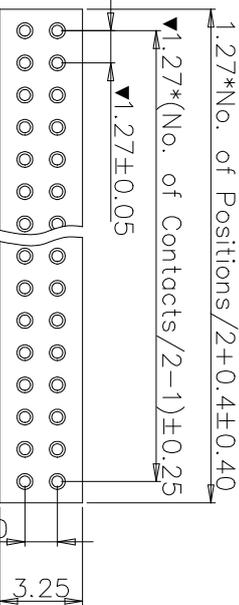

Ordering information

PEA-NNN 2 - A P 0810C

No. of Positions 001-040	Insulator Type code 1 Single row 2 Double row	Pin Plating code 3 G/F 4 Au 2µ" 5 Au 3µ" 6 Au 10µ" 7 Au 15µ" 8 Tin 120µ" S Special
-----------------------------	---	---

Packing		TOLERANCE: ANGLE ±2°		PROJECTION		TITLE: 1.27mmPitch SIP Adapters DIP Pin Length 6.30mm	
1. General		DATE	2024/11/07	CUSTOMER:	N/A	CUSTOMER P/N:	N/A
2. Tape&Reel		DRAWN	黄平金	PART NO.:		DRAWING NO.:	PEA-NNN2-A30810C
3. Tube	√	CHECKED	郑双平	SIZE:	A4	UNIT:	mm
4. Tray		APPROVED	冯显东	SCALE:	2:1	SHEET:	1/1
5. Other							

**natconn**®

广东纳特康电子股份有限公司  
GUANGDONG NATCONN ELECTRONIC CO.,LTD