

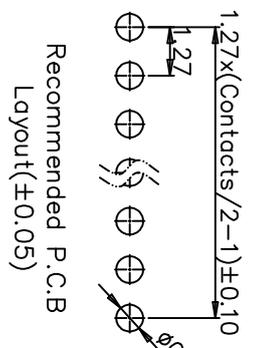
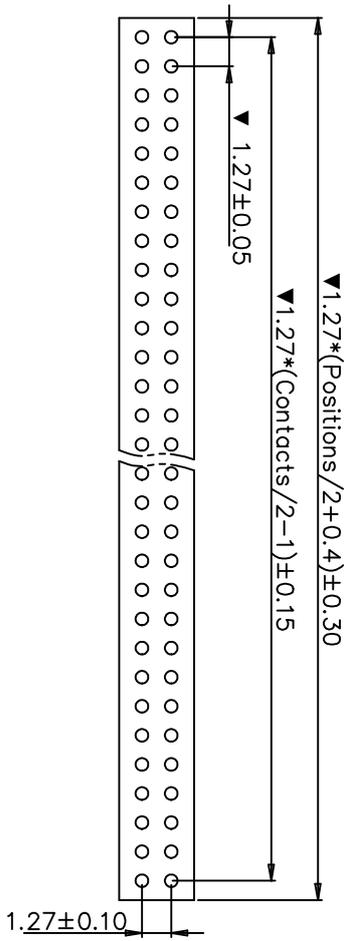


REVISION DATA				
SYM	ECN	DESCRIPTION	DATE	APPROVED

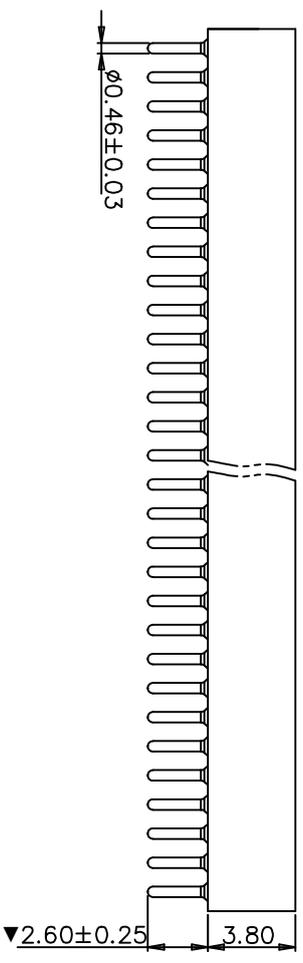

Technical Data
 Sleeve: brass JIS C3604(CuZn39Pb3)
 Contact clip: 6 finger,beryllium copper(C1720)
 Insulator: black glass filled polyester, PPS-GF30-FR,UL94V-0
 see ordering information

Plating:
 Current rating: 40Vrms/60Vdc
 Voltage rating: 10mΩ max.
 Contact resistance: 1000MΩ min. at 100Vdc
 Insulation resistance: 1pF max.
 Capacitance: 500VRMS/minute min.
 Dielectric strength: 1Kgf/contact min.
 Sleeve retention force: 0.305-0.483mm
 Accepted pin: polished steel gauge 0.38mm
 Test pin: 60g t/p. max.
 Insertion force: 15g t/p. min.
 Withdrawal force: 200 cycles min.
 Mechanical life cycle: -40°C to +105°C
 Operating temperature: Solderability: 245±5° 5S
 Critical Dimensions: ▼

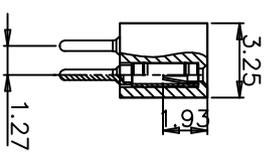

Ordering information

SEA - NNN 2 - A P P 0640A

No. of Positions	Insulator Type code	Pin Plating code	Clip Plating code
1	Single row	1 Tin150μ"	1 Tin150μ"
2	Double row	2 Tin200μ"	2 Tin200μ"
		3 GF	3 GF
		4 Gold2μ"	4 Gold2μ"
		5 Gold3μ"	5 Gold3μ"
		6 Gold10μ"	6 Gold10μ"
		7 Gold15μ"	7 Gold15μ"
		S Special	S Special

Packing		TOLERANCE: ANGLE ±2°		TITLE: 1.27mmPitch SIP Sockets DIP	
1. General		DATE	2016/04/09	CUSTOMER P/N:	N/A
2. Tape&Reel		DRAWN	雷邦军	DRAWING NO.:	N/A
3. Tube	√	CHECKED		NP-SEA-NNN2-A0640A	REV: A
4. Tray		APPROVED		SCALE: 1:1	SHEET: 1/1
5. Other				SIZE: A4	UNIT: mm

natconn® 广东纳特康电子股份有限公司
 GUANGDONG NATCONN ELECTRONIC CO.,LTD