
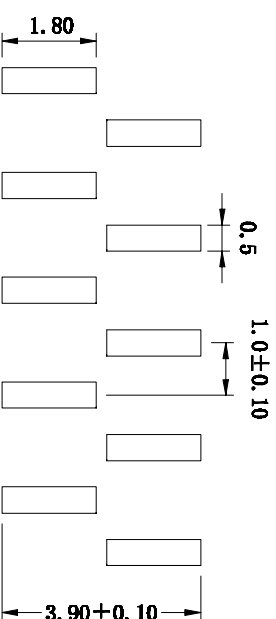
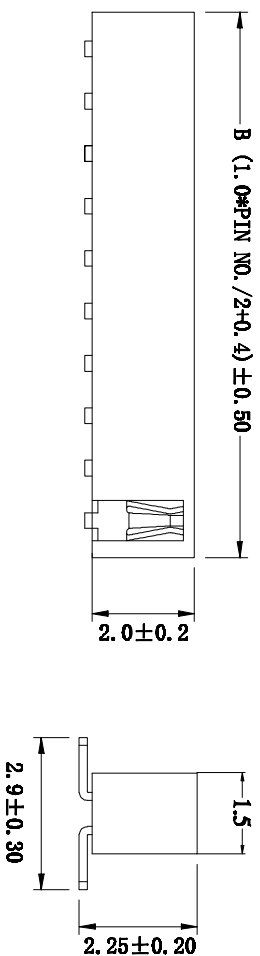


REVISION DATA				
SYM	ECN	DESCRIPTION	DATE	APPROVED

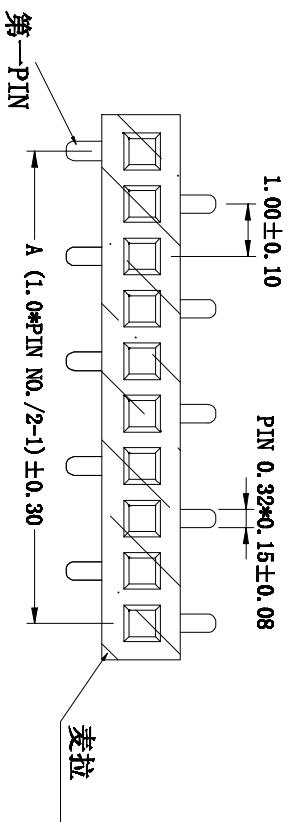

PCB Layout

规格：  
 额定电流：1.0A AC, DC  
 额定电压：50V AC, DC  
 接触电阻：最大20m 欧姆  
 绝缘电阻：最小1000M 欧姆  
 耐受电压：AC 500V AC/分钟  
 工作温度：-40℃~+105℃  
 材料：  
 绝缘体：高温塑料 (尼龙9T UL 94V-D)  
 绝缘体颜色：黑色  
 触点：磷青铜  
 表面处理：镀金

305 - FH 10 X G A 136

No. of Positions 00-99	Plating Option A GF/“ B Au/“ C Au/0u” D GF/5u” S Sn/20u” Z Special	Insulator Material Option A PBT B PA66 C PA6T D PA46 E PPS F LCP G PA6T H PC Z Special	Color A BLACK B GREY C BEIGE D WHITE E NATURAL	Serial NO. 001-999
---------------------------	--	--	---	-----------------------

Packaging		TITLE:		CUSTOMER P/N:		REV:
1.General	√	1.0mm PCB Socket Single Row Straight Type		N/A		N/A
2. Reel		DRAWN		DRAWING NO.:		REV:
3. Tube		DATE		N/A		N/A
4. Tray		CHECKED		N/A		A
5. Other		APPROVED		N/A		A

**natconn**® 广东纳特康电子股份有限公司  
 GUANGDONG NATCONN ELECTRONIC CO.,LTD

TOLERANCE: ANGLE ±2°  
 X.XXX ±0.15  
 X.XX ±0.30  
 X.X ±0.40  
 X. ±0.40

PROJECTION: DATE: 2025/06/19

CUSTOMER: N/A

PART NO.: N/A

DRAWING NO.: NTC-FH10XGA136

SIZE: A4 UNIT: mm SCALE: 1:1 SHEET: 1/1

A

B

C

D

P

6

5

4

3

2

1

6

5

4

3

2

1

A

B

C

D