
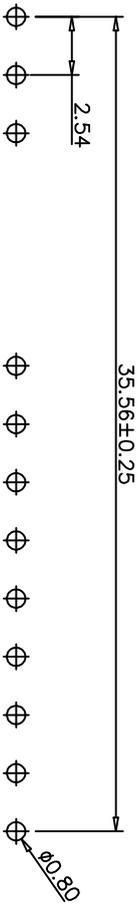


REVISION DATA				
SYM	ECN	DESCRIPTION	DATE	APPROVED
△		修正五金尺寸有3,7修正为3.2mm	2011-11-29	Pang

**Technical Data**  
 Sleeve: brass JIS C3604(CuZn39Pb3)  
 Contact clip: 4 finger,beryllium copper(C1720)  
 Insulator: black glass filled polyester,  
 PPS-GF30-FR,UL94V-0  
 see ordering information

**Plating:**  
 Current rating: 3A  
 Voltage rating: 100Vrms/150Vdc  
 Contact resistance: 10mΩ max.  
 Insulation resistance: 1000MΩ min. at 100Vdc  
 Capacitance: 1pF max.  
 Dielectric strength: 500Vrms/minute min.  
 Sleeve retention force: 1Kgf/contact min.  
 Accepted pin:  $\varnothing 0.385-0.635$ mm  
 polished steel gauge  $\varnothing 0.432$ mm  
 Test pin: 270g typ. max.  
 Insertion force: 90g typ. min.  
 Withdrawal force: 200 cycles min.  
 Mechanical life cycle: -55°C to +105°C  
 Operating temperature: 245±5° SS  
 Solderability:  
 Critical Dimensions: ▼

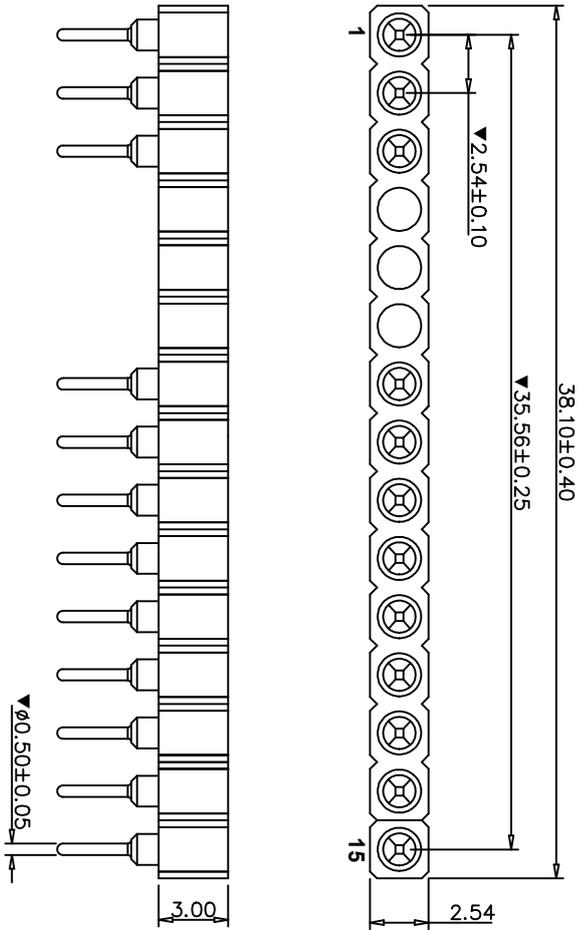

SHA - 015 1 - B P P 0740A - E3

No. of Positions 001-040	Insulator Type code 1 Single row	Pin Plating code 3 G/F 4 Au 2μ" 5 Au 3μ" 6 Au 10μ" 7 Au 15μ" 8 Tin 120μ" S Special	Clip Plating code 3 G/F 4 Au 2μ" 5 Au 3μ" 6 Au 10μ" 7 Au 15μ" 8 Tin 120μ" S Special
-----------------------------	-------------------------------------	---	--

Packing		natconn		广东纳特康电子股份有限公司		GUANGDONG NATCONN ELECTRONIC CO.,LTD	
1. General		TOLERANCE:	ANGLE ±2°	PROTECTION		TITL	254mm Pitch SIP Sockets DIP
2. Tape&Reel			±0.01	DATE	2017/04/17	Pin Length	7.40mm (Pin 4, 5, 6 are Empty)
3. Tube	✓		±0.15	DRAWN	雷邦军	CUSTOMER:	N/A
4. Tray			±0.25	CHECKED		PART NO.:	SHA-015-80740A-E3
5. Other			±0.50	APPROVED		SIZE:	A4
						UNIT:	mm
						SCALE:	1:1
						SHEET:	1/1