





REVISION DATA				
SYM	ECN	DESCRIPTION	DATE	APPROVED

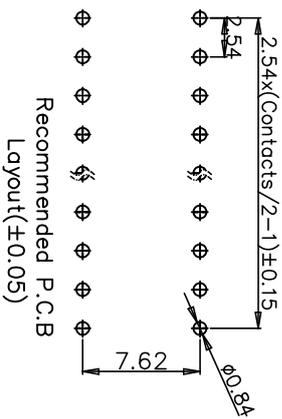

Technical Data

Sleeve: brass JIS C3604(CuZn39Pb3)
 Contact clip: 4 finger/beryllium copper(C1720)
 Insulator: black glass filled polyester,
 see ordering information

Plating:
 Current rating: 100Wacs/150Vdc
 Voltage rating: 10m² max.
 Contact resistance: 1000m² min. at 100Vdc
 Insulation resistance: 10⁹ max.
 Capacitance: 1000Vrms/minute min.
 Dielectric strength: 1Kgf/contact min.
 Sleeve retention force: 0.381-0.635mm
 Accepted pin: polished steel gauge 0.432mm
 Test pin: 270g Vp. max.
 Insertion force: 90g Vp. min.
 Withdrawal force: 200 cycles min.
 Mechanical life cycle: -55°C to +105°C
 Operating temperature: 245±5° SS
 Soldering temperature: Critical Dimensions: ▼

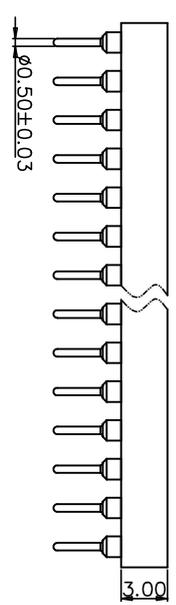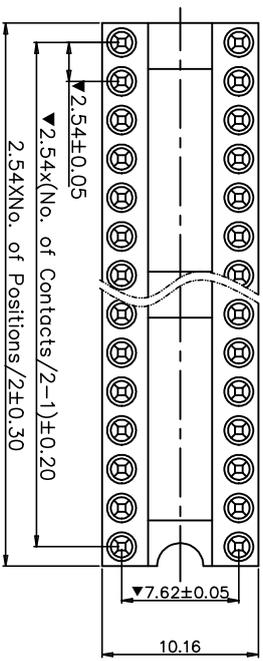

Ordering information
SHA - NNN 3 - B P P P 0740A

No. of Positions 001-040	Insulator Type code 3 7.62mm 4 10.16mm 6 15.24mm 9 22.86mm	Pin Plating code 1 Tin 150μ" 2 Tin 200μ" 3 G/F 4 Au 2μ" 5 Au 3μ" 6 Au 10μ" 7 Au 15μ" 8 Tin 120μ" S Special	Clip Plating code 3 G/F 4 Au 2μ" 5 Au 3μ" 6 Au 10μ" 7 Tin 150μ" 8 Tin 120μ" S Special
-----------------------------	--	---	--

natconn 广东纳特康电子股份有限公司
 GUANGDONG NATCONN ELECTRONIC CO.,LTD

No. of Positions	DIM"A"	DIM"B"	Middle bar
04	5.08	2.54	none
06	7.62	5.08	none
08	10.16	7.62	none
10	12.70	10.16	none
14	17.78	15.24	none
16	20.32	17.78	none
18	22.86	20.32	none / 1pc
20	25.40	22.86	none / 1pc
22	27.94	25.40	1pc
24	30.48	27.94	1pc
28	35.56	33.02	none / 1pc

with middle bar is standard

Packing		TOLERANCE: ANGLE ±2°		TITLE: 2.54mmPitch IC Sockets DIP	
1. General		DATE	2017/07/17	CUSTOMER P/N:	N/A
2. Tape&Reel		DRAWN	王伟超	DRAWING NO.:	SHA-NNN3-BP0740A
3. Tube	✓	CHECKED		REV:	A
4. Tray		APPROVED		SIZE:	A4
5. Other				UNIT:	mm