

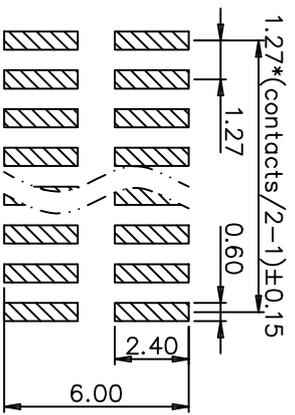


REVISION DATA				
SYM	ECN	DESCRIPTION	DATE	APPROVED

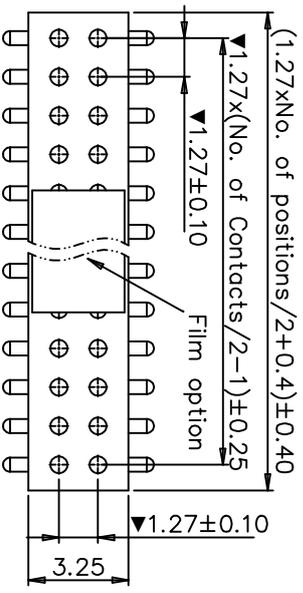

Recommended P.C.B Layout(±0.05)

**Technical Data**  
 Sleeve: brass JIS C3604(CuZn39Pb3)  
 Contact clip: 6 finger,beryllium copper(C1720)  
 Insulator: black glass filled polyester, PPS-GF30-FR,UL94V-0  
 see ordering information  
**Plating:** 1A  
**Current rating:** 40V/RMS/60VDC  
**Voltage rating:** 10mΩ max.  
**Contact resistance:** 1000MΩ min. at 100VAC  
**Capacitance:** 1pF max.  
**Dielectric strength:** 500V/RMS/minute min.  
**Sleeve retention force:** 1kgf/contact min.  
**Accepted pin:** Ø0.305-0.483mm  
 polished steel gauge Ø0.38mm  
**Test pin:** 60g typ. max.  
**Insertion force:** 15g typ. min.  
**Withdrawal force:** 200 cycles min.  
**Mechanical life cycle:** -55°C to+105°C  
**Operating temperature:** 260±5° 5S  
**Soldering temperature:** Critical Dimensions:▼

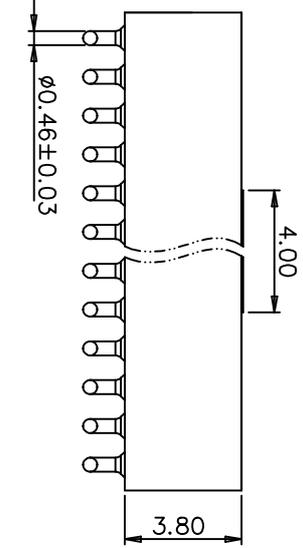

Ordering information

SED - NNN 2 - F P P 0600A

No. of Positions 004-100	Insulator Type code 2 Dual row	Pin Plating code 3 G/F 4 Au 2μ" 5 Au 3μ" 6 Au 10μ" 7 Au 15μ" 8 Tin 120μ" S Special	Clip Plating code 3 G/F 4 Au 2μ" 5 Au 3μ" 6 Au 10μ" 7 Au 15μ" 8 Tin 120μ" S Special
-----------------------------	-----------------------------------	---	--

<b>1. General</b>	
<b>2. Tape&amp;Reel</b>	✓
<b>3. Tube</b>	
<b>4. Tray</b>	
<b>5. Other</b>	

<b>natconn</b> 广东纳特康电子股份有限公司 GUANGDONG NATCONN ELECTRONIC CO.,LTD	
<b>TOLERANCE:</b>	ANGLE ±2°
<b>PROJECTION:</b>	DATE 2015/12/17
<b>DATE:</b>	DRAWN 江国注
<b>CHECKED:</b>	CHECKED 唐建平
<b>APPROVED:</b>	APPROVED 冯显东
<b>TITLE:</b>	1.27mmPitch SIP Sockets SMT Pin Length 6.0mm
<b>CUSTOMER:</b>	CUSTOMER P/N: N/A
<b>PART NO.:</b>	DRAWING NO.: SED-NNN2-FPP0600A
<b>SIZE:</b>	SCALE: 1:1
<b>UNIT:</b>	SHEET: 1/1