

CUSTOMER COPY






REVISION DATA				
SYM	ECN	DESCRIPTION	DATE	APPROVED

Technical Data

Sleeve: brass JIS C3604(CuZn39Pb3)
 Contact clip: 4 finger,beryllium copper(C1720)
 Insulator: black glass filled polyester,
 PPS-GF30-FR,UL94V-0
 see ordering information

Plating:
 Current rating: 3A
 Voltage rating: 100Vrms/150Vdc
 Contact resistance: 10mΩ max.
 Insulation resistance: 1000MΩ min. at 100Vdc
 Capacitance: 1pF max.
 Dielectric strength: 500VRMS/minute min.
 Sleeve retention force: 1Kgf/contact min.
 Accepted pin: Ø0.385-0.635mm
 polished steel gouge Ø0.432mm

Test pin: 270g typ. max.
 Insertion force: 90g typ. min.
 Withdrawal force: 200 cycles min.
 Mechanical life cycle: -55°C to +105°C
 Operating temperature: 245±5 SS
 Solderability: Critical Dimensions: ▼

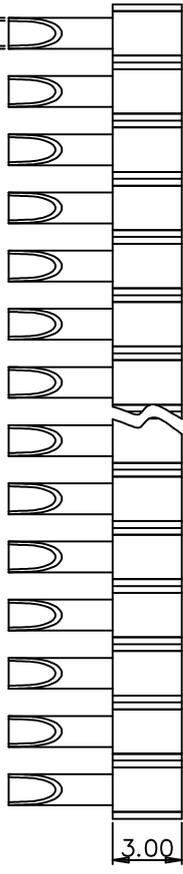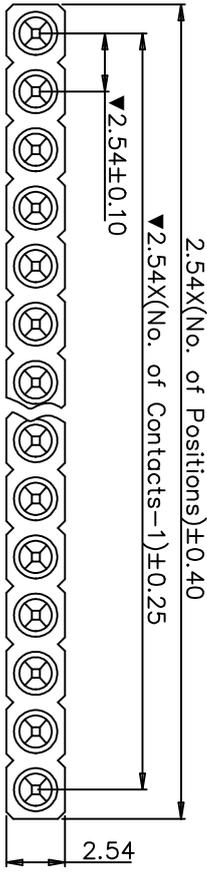

Ordering information

SHA - NNN 1 - E P P P 0750A

No. of Positions 001-064	Insulator Type code 1 Single row	Pin Plating code 1 Tin150µ" 2 Tin200µ" 3 G/F 4 Au 2µ" 5 Au 3µ" 6 Au 10µ" 7 Au 15µ" 8 Tin 120µ" S Special	Clip Plating code 1 Tin150µ" 2 Tin200µ" 3 G/F 4 Au 2µ" 5 Au 3µ" 6 Au 10µ" 7 Au 15µ" 8 Tin 120µ" S Special
-----------------------------	-------------------------------------	---	--

Packing		TITLE: 2.54mmPitch SIP Sockets DIP Pin Length 7.50mm	
1. General	✓	TOLERANCE: ANGLE ±2°	
2. Tape&Reel	✓	PROJECTION	DATE: 2022.7.26
3. Tube	✓	DRAWN	MO
4. Tray	✓	CHECKED	PARTNO.: N/A
5. Other	✓	APPROVED	SIZE: A4
Customer: GUANGDONG NATCONN ELECTRONIC CO.,LTD		CUSTOMER P/N:	SCALE: 1:1
DRAWING NO.: SHA-NNN1-EPP0750A		REV: A	SHEET: 1/1

natconn 广东纳特康电子股份有限公司
 GUANGDONG NATCONN ELECTRONIC CO.,LTD

6 5 4 3 2 1