

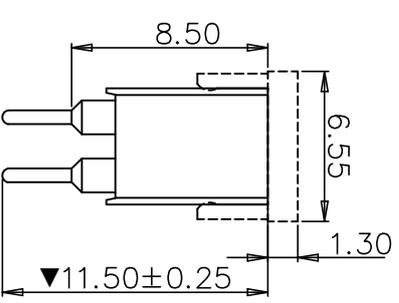
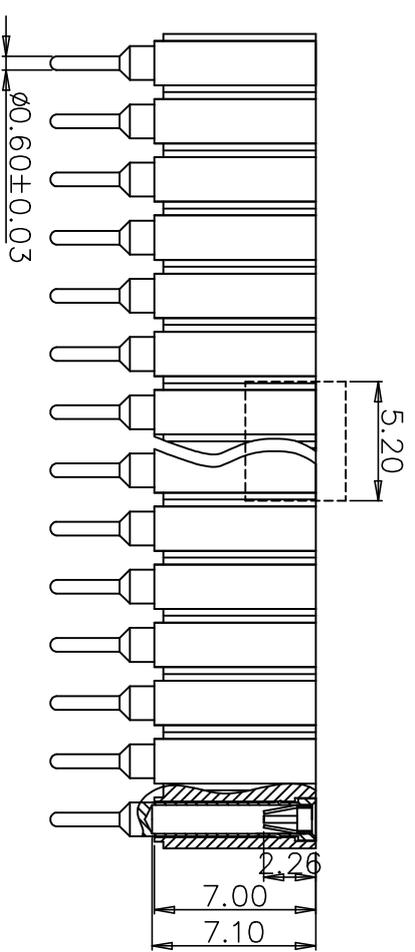


CUSTOMER COPY

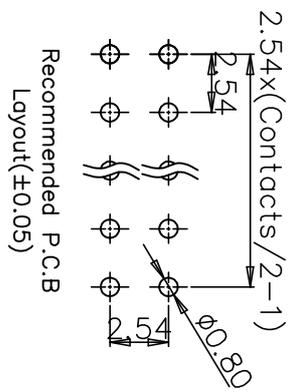

REVISION DATA				
SYM	ECN	DESCRIPTION	DATE	APPROVED
A2		Update drawing	2013/11/05	张丰志

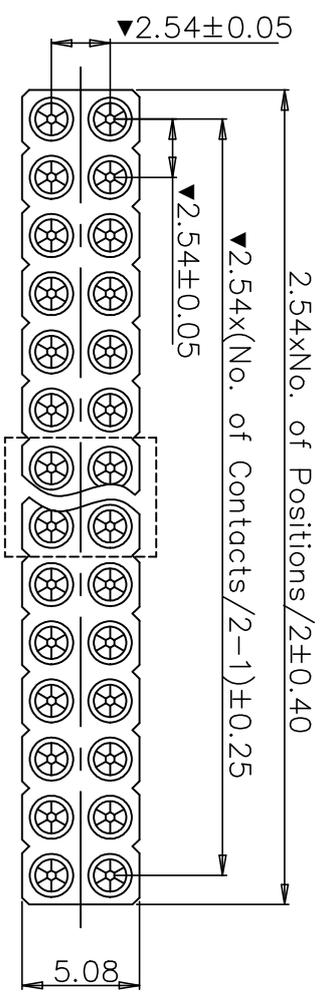

Technical Data
 Sleeve: brass JIS C3604(CuZn39Pb3)
 Contact clip: 6 finger,beryllium copper(C1720)
 Insulator: black glass filled polyester, PPS-GF30-FR,UL94V-0
 see ordering information

Plating:
 Current rating: 3A
 Voltage rating: 100Vrms/150Vdc
 Contact resistance: 10mΩ max.
 Insulation resistance: 1000MΩ min. at 100Vdc
 Capacitance: 1pF max.
 Dielectric strength: 1000VRMS/minute min.
 Sleeve retention force: 3.0kgf/contact min.
 Accepted pin: 0.635-0.889mm
 Test pin: polished steel gauge 0.66mm
 Insertion force: 140g typ. max.
 Withdrawal force: 25g typ. min.
 Mechanical life cycle: 200 cycles min.
 Operating temperature: -55°C to +105°C
 Solderability: 245±5" 5S
 Critical Dimensions: ▼

Ordering information

SHA - NNN 2 - I P P 1150A-1

No. of Positions	Insulator T Type code	Pin Plating code	Clip Plating code
002~100	1 Single row	1 Tin150μ"	1 Tin150μ"
	2 Double row	2 Tin200μ"	2 Tin200μ"
		3 GF	3 GF
		4 Gold2μ"	4 Gold2μ"
		5 Gold3μ"	5 Gold3μ"
		6 Gold10μ"	6 Gold10μ"
		7 Gold15μ"	7 Gold15μ"
		S Special	S Special

natconn 广东纳特康电子股份有限公司
 GUANGDONG NATCONN ELECTRONIC CO.,LTD

TOLERANCE:	PROJECTION	TITLE:
ANGLE ±2°	DATE	Pitch 2.54mm Dual Row Sockets
X.XXX ±0.01	DRAWN	Pin Length 11.50mm
X.XX ±0.25	CHECKED	CUSTOMER:
X.X ±0.35	APPROVED	PART NO.:
X. ±0.50		SIZE: A4
		UNIT: mm
		SCALE: 1:1
		SHEET: 1/1