




REVISION DATA				
SYM	ECN	DESCRIPTION	DATE	APPROVED
B		更改麦拉规格	2016.07.15	雷邦军

Technical Data  
 Sleeve: brass JIS C3604(CuZn39Pb3)  
 Contact clip: 6 finger,beryllium copper(C1720)  
 Insulator: black glass filled polyester, PPS-GF30-FR,UL94V-0  
 see ordering information

Plating:  
 Current rating: 40VRMS/60VDC  
 Voltage rating: 10mΩ max.  
 Contact resistance: 1000MΩ min. at 100VAC  
 Capacitance: 1pF max.  
 Dielectric strength: 500VRMS/minute min.  
 Sleeve retention force: 1Kgf/contact min.  
 Accepted pin:  $\varnothing 0.305-0.483\text{mm}$   
 Test pin: polished steel gauge  $\varnothing 0.38\text{mm}$   
 Insertion force: 60g typ. max.  
 Withdrawal force: 15g typ. min.  
 Mechanical life cycle: 200 cycles min.  
 Operating temperature:  $-55^{\circ}\text{C}$  to  $+105^{\circ}\text{C}$   
 Soldering temperature:  $260\pm 5^{\circ}\text{S}$   
 Critical Dimensions:  $\blacktriangledown$

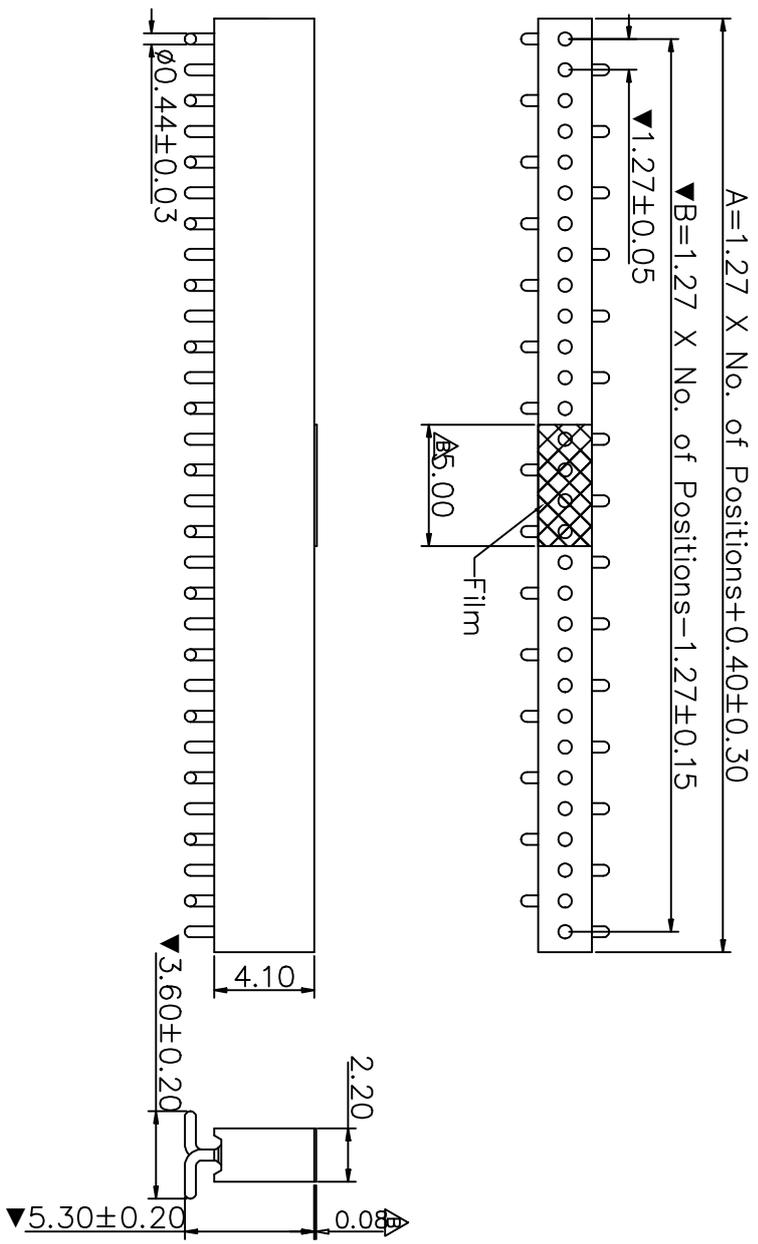

Ordering information

SED - NNN 1 - A P P 0600B

No. of Positions	Insulator Type code	Pin Plating code	Clip Plating code
1	Single row	1 Tin150μ"	1 Tin150μ"
2	Double row	2 Tin200μ"	2 Tin200μ"
		3 GF	3 GF
		4 Gold2μ"	4 Gold2μ"
		5 Gold3μ"	5 Gold3μ"
		6 Gold10μ"	6 Gold10μ"
		7 Gold15μ"	7 Gold15μ"
		S Special	S Special

Packing		TOLERANCE: $\pm 2^{\circ}$		PROJECTION		TITLE:	
1. General		ANGLE $\pm 2^{\circ}$		DATE	2016/07/15	1.27mmPitch SIP Sockets SMT	
2. Tape&Reel		X.XXX $\pm 0.01$		DRAWN	雷邦军	CUSTOMER:	N/A
3. Tube	✓	X.XX $\pm 0.25$		CHECKED	唐建平	PART NO.:	SED-NNN1-A-PP0600B
4. Tray		X.X $\pm 0.35$		APPROVED	冯显东	SIZE:	A4
5. Other		X. $\pm 0.50$				UNIT:	mm
						SCALE:	1:1
						SHEET:	1/1

natconn 广东纳特康电子股份有限公司  
 GUANGDONG NATCONN ELECTRONIC CO.,LTD