






REVISION DATA				
SYM	ECN	DESCRIPTION	DATE	APPROVED

Technical Data
 Sleeve: brass JIS C3604(CuZn39Pb3)
 Contact clip: 4 finger,beryllium copper(C1720)
 Insulator: black glass filled polyester,
 see ordering information
 Plating: 3A
 Current rating: 100Vrms/150Vdc
 Voltage rating: 10mΩ max.
 Contact resistance: 1000MΩ.min. at 100Vdc
 Insulation resistance: 1pF max.
 Capacitance: 1000V/RMS/minute min.
 Dielectric strength: 1KgF/contact min.
 Sleeve retention force: $\phi 0.381-0.635$ mm
 Accepted pin: polished steel gauge $\phi 0.432$ mm
 Test pin: 270g typ. max.
 Insertion force: 90g typ. min.
 Withdrawal force: 200 cycles min.
 Mechanical life cycle: -55°C to +105°C
 Operating temperature: 245±5° 5S
 Soldering temperature:
 Critical Dimensions: ▼

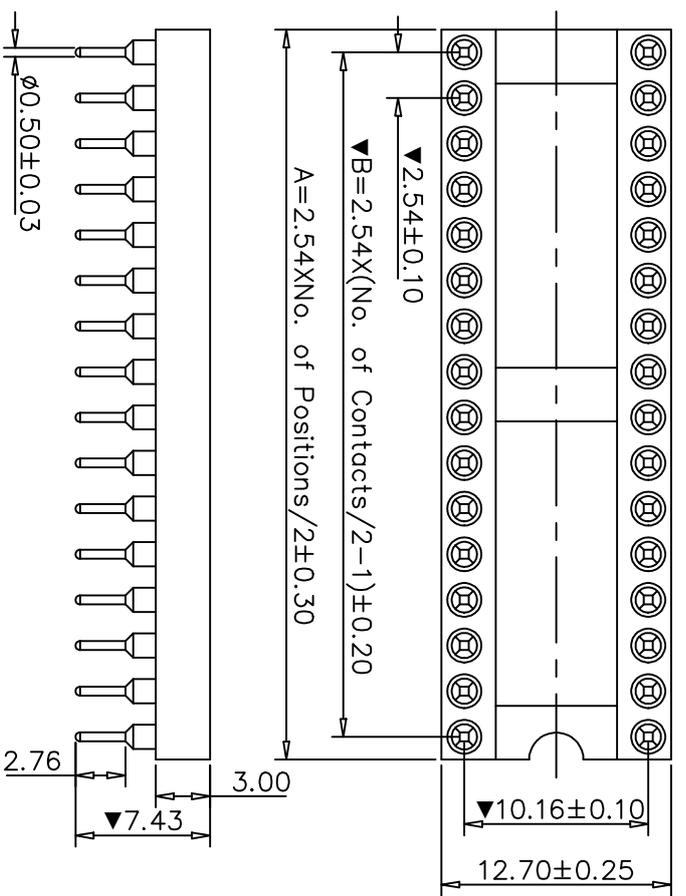

P.C.B LAYOUT

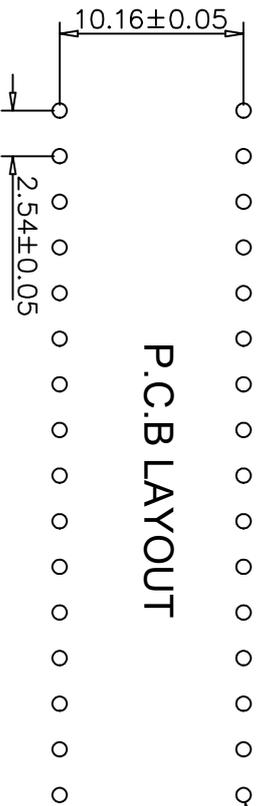

No. of Positions	DIM"A"	DIM"B"
24	30.48	27.94
28	35.56	33.02
32	40.64	38.10
40	50.80	48.26
48	60.96	58.42

SHA - NNN 4 - B P P 0743A

No. of Positions	Row spacing code	Pin Plating code	Clip Plating code
3	7.62mm	1 Tin150μ"	1 Tin150μ"
4	10.16mm	2 Tin200μ"	2 Tin200μ"
6	15.24mm	3 GF	3 GF
9	22.86mm	4 Gold2μ"	4 Gold2μ"
		5 Gold3μ"	5 Gold3μ"
		6 Gold10μ"	6 Gold10μ"
		7 Gold15μ"	7 Gold15μ"
		S Special	S Special

Packing	
1. General	
2. Tape&Reel	
3. Tube	✓
4. Tray	
5. Other	

natconn 广东纳特康电子股份有限公司
 GUANGDONG NATCONN ELECTRONIC CO.,LTD

TOLERANCE: ANGLE ±2°	PROJECTION	TITLE: 2.54mmPitch IC Sockets DIP
DATE: 2015/03/24	DATE: 唐建平	DIP Spacing 10.16mm Pin Length 7.43mm
DRAWN: X.XXX ±0.05	CHECKED: X.XX ±0.20	CUSTOMER P/N: N/A
CHECKED: X.XX ±0.30	APPROVED: X. ±0.50	PART NO.: SHA-NNN4-BPP0743A
		SIZE: A4
		UNIT: mm
		SCALE: 2:1
		SHEET: 1/1