


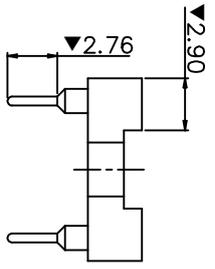
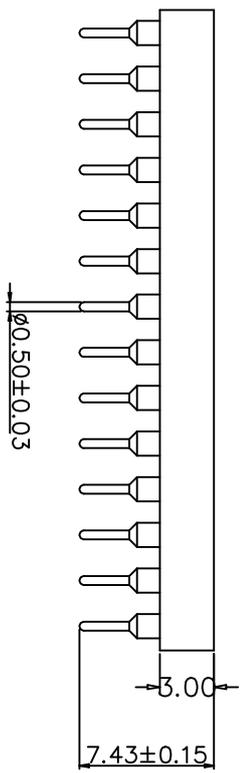


CUSTOMER COPY

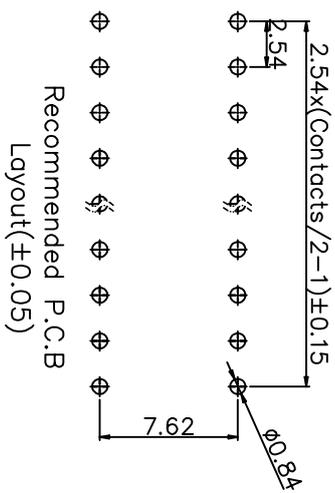

REVISION DATA				
SYM	ECN	DESCRIPTION	DATE	APPROVED

**Technical Data**  
 Sleeve: brass JIS C3604(CuZn39Pb3)  
 Contact clip: 4 Finger,beryllium copper(C1720)  
 Insulator: PBT+30GF-UL94V-0,  
 see ordering information  
 Plating: 3A  
 Current rating: 100Vrms/150Vdc  
 Voltage rating: 10Vm max.  
 Contact resistance: 1000mΩ.min. at 100Vdc  
 Insulation resistance: 1pF max.  
 Capacitance: 1000V/RMS/minute min.  
 Dielectric strength: 1KgF/contact min.  
 Sleeve retention force:  $\phi 0.381-0.635$ mm  
 Accepted pin: polished steel gauge  $\phi 0.432$ mm  
 Test pin: 270g typ. max.  
 Insertion force: 90g typ. min.  
 Withdrawal force: 200 cycles min.  
 Mechanical life cycle: -55°C to +105°C  
 Operating temperature: 24±5° 55  
 Soldering temperature: Critical Dimensions: ▼

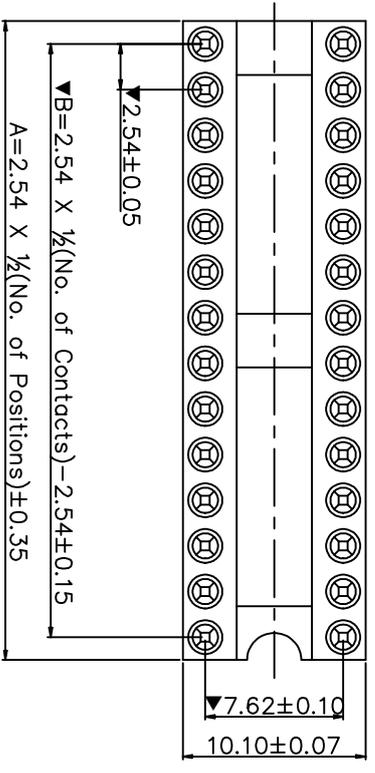

No. of Positions	Dim/A"	Dim/B"
6	7.62	5.08
8	10.16	7.62
14	17.78	15.24
16	20.32	17.78
18	22.86	20.32
20	25.40	22.86
24	30.48	27.94
28	35.56	33.02

SHA - NNN 3 - E P P 0743A

No. of Positions	Row spacing code	Pin Plating code	Clip Plating code
3	7.62mm	1 Tin150μ"	1 Tin150μ"
4	10.16mm	2 Tin200μ"	2 Tin200μ"
6	15.24mm	3 GF	3 GF
9	22.86mm	4 Gold2μ"	4 Gold2μ"
		5 Gold3μ"	5 Gold3μ"
		6 Gold10μ"	6 Gold10μ"
		7 Gold15μ"	7 Gold15μ"
		S Special	S Special

Packing		TOLERANCE: ±2°		TITLE:	
1. General		ANGLE	±2°	2.54mmPitch IC Sockets DIP	
2. Tape&Reel		DATE	2015/03/24	DIP Spacing 7.62mm Pin Length 7.45mm	
3. Tube	✓	DRAWN	唐建平	CUSTOMER:	N/A
4. Tray		CHECKED	于松	PART NO.:	SHA-NNN3-EPP0743A
5. Other		APPROVED	冯显东	SCALE:	2:1
				SIZE:	A4
				UNIT:	mm
				SHEET:	1/1

natconn 广东纳特康电子股份有限公司  
 GUANGDONG NATCONN ELECTRONIC CO.,LTD