




CUSTOMER COPY




REVISION DATA				
SYM	ECN	DESCRIPTION	DATE	APPROVED

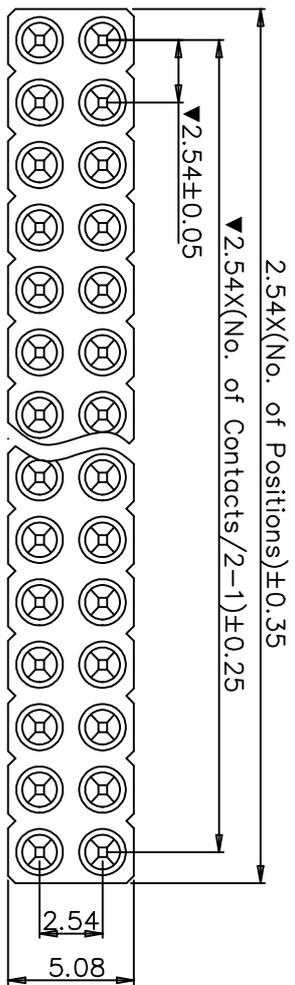

Technical Data  
 Sleeve: brass JIS C3604(CuZn39Pb5)  
 Contact clip: 4 finger,beryllium copper(C1720)  
 Insulator: black glass filled polyester,  
 PPS-GF30-FR,UL94V-0  
 see ordering information

Plating:  
 Current rating: 3A  
 Voltage rating: 100Vrms/150Voc  
 Contact resistance: 10mΩ max.  
 Insulation resistance: 1000MΩ min. at 100Vdc

Recommended P.C.B Layout(±0.05)  
 Capacitance: 1pF max.  
 Dielectric strength: 500Vrms/minute min.  
 Sleeve retention force: 1kgf/contact min.  
 Accepted pin: ø0.381-0.635mm  
 polished steel gauge ø0.432mm  
 270g typ. max.  
 Insertion force: 90g typ. min.  
 Withdrawal force: 200 cycles min.  
 Operating temperature: -55°C to+105°C  
 Solderability: 245±5° SS  
 Critical Dimensions: ▼

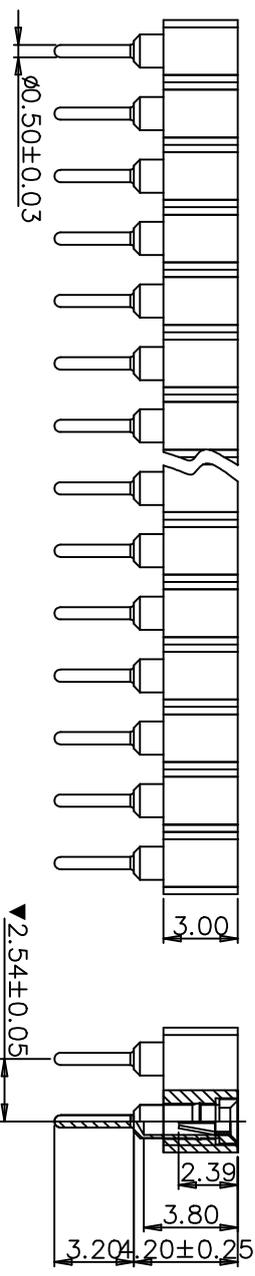

Ordering information

SHA - NNN 2 - B P P 0740A

No. of Positions  
001-040

Insulator Type code  
1 Single row  
2 Double row

Pin Plating code  
3 G/F  
4 Au 2μ"  
5 Au 3μ"  
6 Au 10μ"  
7 Au 15μ"  
8 Tin 120μ"  
S Special

Clip Plating code  
3 G/F  
4 Au 2μ"  
5 Au 3μ"  
6 Au 10μ"  
7 Au 15μ"  
8 Tin 120μ"  
S Special

Packing	
1. General	√
2. Tape&Reel	
3. Tube	√
4. Tray	
5. Other	

TOLERANCE: ANGLE ±2°		TITLE: 2.54mmPitch SIP Sockets DIP	
PROJECTION: DATE: 2013/07/02		Pin Length 7.40mm	
DRAWN: 张国灵	CUSTOMER: N/A	CUSTOMER P/N: N/A	REV: N/A
CHECKED: 唐建平	PART NO.: SHA-NNN2-BPP0740A	DRAWING NO.: SHA-NNN2-BPP0740A	REV: A
APPROVED: 冯显东	SIZE: A4	UNIT: mm	SCALE: 5:1
			SHEET: 1/1

natconn 广东纳特康电子股份有限公司  
 GUANGDONG NATCONN ELECTRONIC CO.,LTD