




CUSTOMER COPY

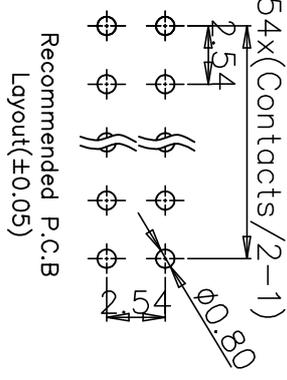

REVISION DATA				
SYM	ECN	DESCRIPTION	DATE	APPROVED

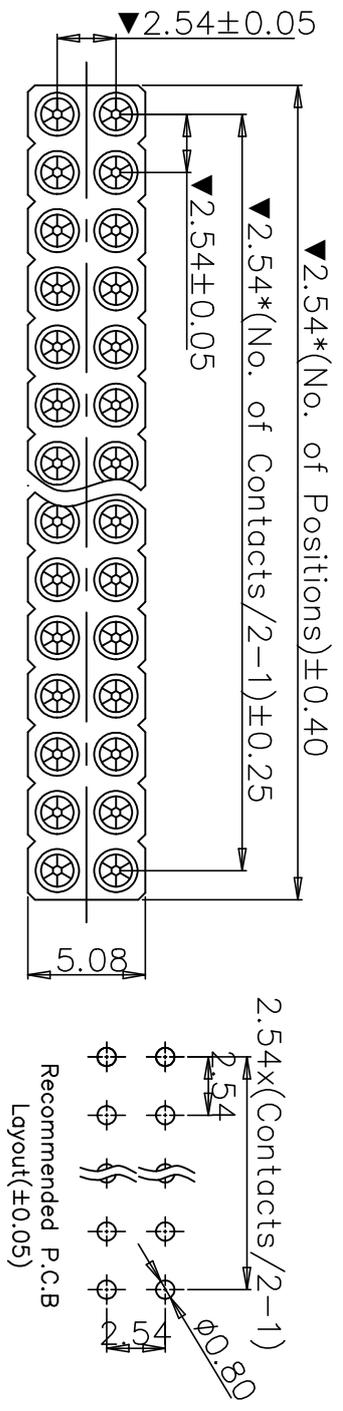


Technical Data
 Sleeve: brass JIS C3604(CuZn39Pb3)
 Contact clip: 6 finger,beryllium copper(C1720)
 Insulator: black glass filled polyester, PPS-GF30-FR,UL94V-0
 see ordering information

Plating:
 Current rating: 3A
 Voltage rating: 100Vrms/150Vdc
 Contact resistance: 10mΩ max.
 Insulation resistance: 1000MΩ min. at 100Vdc

Capacitance: 1pF max.
Dielectric strength: 1000VRMS/minute min.
Sleeve retention force: 3.0Kgf/contact min.
Accepted pin: Ø0.635-0.889mm
 polished steel gauge Ø0.66mm

Test pin: 140g t/p. max.
Insertion force: 25g t/p. min.
Withdrawal force: 200 cycles min.
Mechanical life cycle: -55°C to +105°C
Operating temperature: 245±5° 5S
Solderability: Critical Dimensions: ▼

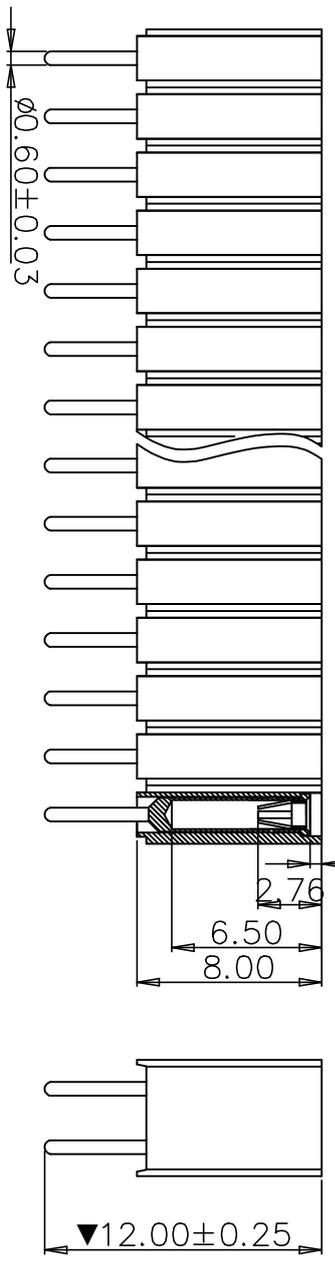

Ordering information

SHA - NNN 2 - J P P 1200B

No. of Positions	Insulator T Type code	Pin Plating code	Clip Plating code
002-080	1 Single row	1 Tin150µ"	1 Tin150µ"
	2 Double row	2 Tin200µ"	2 Tin200µ"
		3 GF	3 GF
		4 Gold2µ"	4 Gold2µ"
		5 Gold3µ"	5 Gold3µ"
		6 Gold10µ"	6 Gold10µ"
		7 Gold15µ"	7 Gold15µ"
		S Special	S Special

natconn 广东纳特康电子股份有限公司
 GUANGDONG NATCONN ELECTRONIC CO.,LTD

TOLERANCE: ANGLE ±2°
 X.XXX ±0.01
 X.XX ±0.25
 X.X ±0.35
 X. ±0.50

PROJECTION	TITLE
DATE: 2019/03/01	Pitch 2.54mm Dual Row Sockets Pin Length 12.00mm H8.0
DRAWN: MO	CUSTOMER: CUSTOMER P/N:
CHECKED	PART NO.:
APPROVED	SIZE: A4

DRAWING NO.: SHA-NNN2-JPP1200B
 SCALE: 3:1
 SHEET: 1/1

6 5 4 3 2 1