

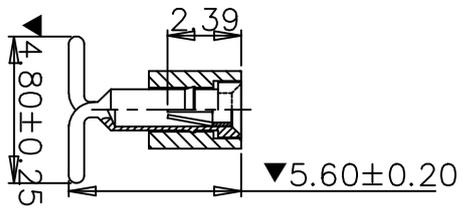


CUSTOMER COPY

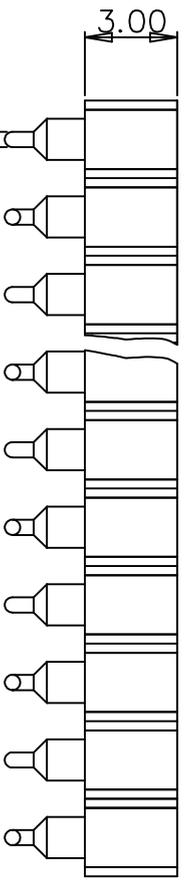

REVISION DATA				
SYM	ECN	DESCRIPTION	DATE	APPROVED

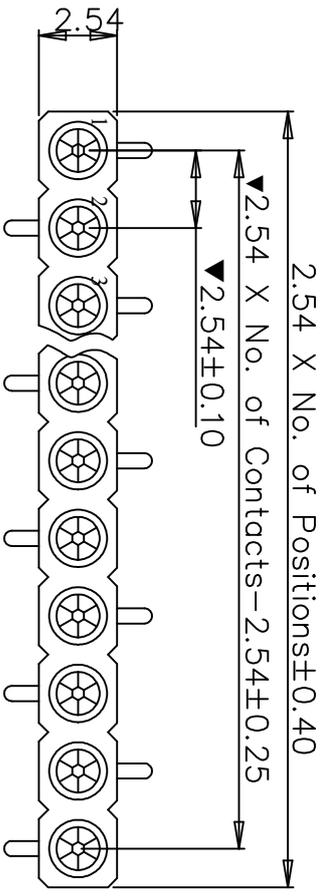

Technical Data  
 Sleeve: brass JIS C3604(CuZn39Pb3)  
 Contact clip: 4 finger,beryllium copper(C1720)  
 Insulator: black glass filled polyester,  
 PPS-GF30-FR,UL94V-0  
 see ordering information

Plating:  
 Current rating: 3A  
 Voltage rating: 40Vrms/60Vdc  
 Contact resistance: 10mΩ max.  
 Capacitance: 1000MΩ min. at 100Vdc  
 Dielectric strength: 1pF max.  
 Sleeve retention force: 500VRMS/minute min.  
 Accepted pin: 2.5Kgf/contact min.  
 Test pin:  $\phi 0.381-0.635$ mm  
 Insertion force: polished steel gauge  $\phi 0.43$ mm  
 Withdrawal force: 270g typ. max.  
 Mechanical life cycle: 90g typ. min.  
 Operating temperature: 200 cycles min.  
 Solderability: -55°C to +105°C  
 Critical Dimensions:  $260 \pm 5$  5S

### Ordering information

SHD - NNN 1 - B P P 0743A

No. of Positions	Row spacing code	Pin Plating code	Clip Plating code
1 Single row	1 Single row	1 Tin150μ"	1 Tin150μ"
2 Double row	2 Double row	2 Tin200μ"	2 Tin200μ"
		3 GF	3 GF
		4 Gold2μ"	4 Gold2μ"
		5 Gold3μ"	5 Gold3μ"
		6 Gold10μ"	6 Gold10μ"
		7 Gold15μ"	7 Gold15μ"
		S Special	S Special

TOLERANCE: ANGLE $\pm 2^\circ$ X.XXX $\pm 0.05$ X.XX $\pm 0.20$ X.X $\pm 0.30$ X. $\pm 0.50$		TITLE: 2.54mmPitch SIP Sockets DIP Pin Length 7.43mm	
PROJECTION	DATE	DRAWN	CHECKED
APPROVED	2014/06/02	唐建平	于松
CUSTOMER:	PART NO.:	CUSTOMER P/N:	DRAWING NO.:
N/A		N/A	SHD-NNN1-BPP0743A
SIZE:	UNIT:	SCALE:	SHEET:
A4	mm	2:1	1/1