

CUSTOMER COPY







REVISION DATA				
SYM	ECN	DESCRIPTION	DATE	APPROVED

Technical Data

Contact: brass JIS C3604(CuZn39Pb5)
 Insulator: black glass filled polyester, PPS-GF30-FR,UL94V-0
 see ordering information

Plating: 40VRMS/60V DC
 Current rating: 4mΩ max.
 Voltage rating: 1000MΩ min. at 100V AC
 Contact resistance: 1pF max.
 Insulation resistance: 1000VRMS min.
 Capacitance: 2.5Kgf/contact min.
 Dielectric strength: -40°C to +105°C
 Sleeve retention force: 245±5 SS
 Operating temperature: Critical Dimensions: ▼

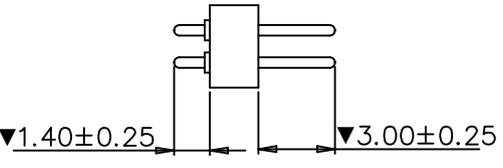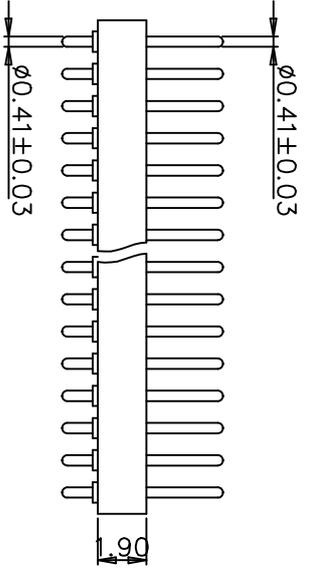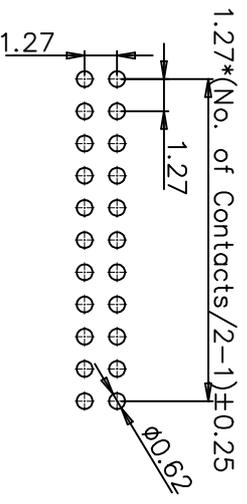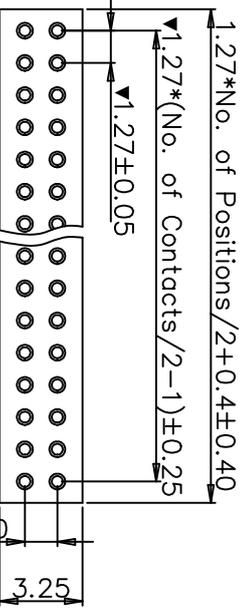

Ordering information

PEA - NNN 2 - A P 0810C

No. of Positions 001-040	Insulator Type code 1 Single row 2 Double row	Pin Plating code 3 G/F 4 Au 2μ" 5 Au 3μ" 6 Au 10μ" 7 Au 15μ" 8 Tin 120μ" S Special
-----------------------------	---	---

Packing		TITLE: 1.27mmPitch SIP Adapters DIP Pin Length 6.30mm	
1. General	TOLERANCE: ANGLE ±2°	PROJECTION	CUSTOMER: N/A
2. Tape&Reel	X.XXX ±0.05	DATE: 2024/11/07	CUSTOMER P/N: N/A
3. Tube	X.XX ±0.20	DRAWN: 黄平金	REVISION: N/A
4. Tray	X.X ±0.30	CHECKED: 郑双平	DRAWING NO.: PEA-NNN2-A30810C
5. Other	X. ±0.50	APPROVED: 冯显东	SCALE: 2:1
		SIZE: A4	SHEET: 1/1

natconn 广东纳特康电子股份有限公司
 GUANGDONG NATCONN ELECTRONIC CO.,LTD

