

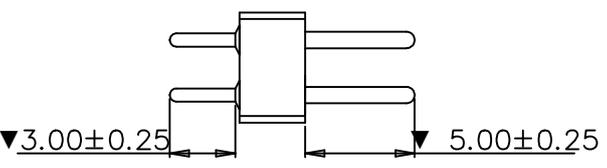
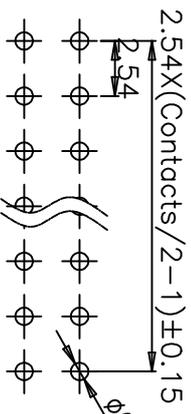


CUSTOMER COPY

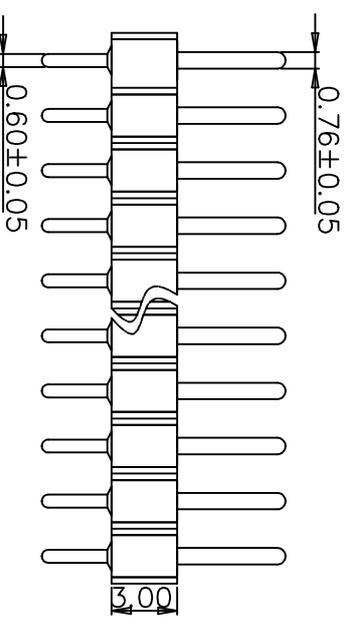

| REVISION DATA | | | | |
|---------------|-----|-------------|------|----------|
| SYM | ECN | DESCRIPTION | DATE | APPROVED |
| | | | | |
| | | | | |

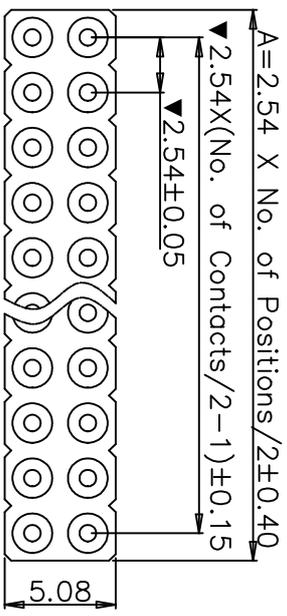

Technical Data
Contact:
Insulator:

brass JIS C3604(CuZn39Pb3)
black glass filled polyester,
PPS-GF30-FR,UL94V-0
see ordering information
3A
100V/RMS/150V DC
10mΩ max.
1000MΩ min. at 100V AC
1pF max.
1000V/RMS min.
Sleeve retention force: 2.5Kgf/contact min.
Operating temperature: -40°C to+105°C
Solderability: 245±5° 5S
Critical Dimensions: ▼

Ordering information

PHA - NNN 2 - B P 1120A

| | | |
|------------------|---------------------|------------------|
| No. of Positions | Insulator Type code | Pin Plating code |
| 1 Single row | 1 | 1 Tin150μ" |
| 2 Double row | 2 | 2 Tin200μ" |
| | | 3 GF |
| | | 4 Gold2μ" |
| | | 5 Gold3μ" |
| | | 6 Gold10μ" |
| | | 7 Gold15μ" |
| | | S Special |

| | | | |
|---|--------------------|--|------------------|
| 广东纳特康电子股份有限公司 GUANGDONG NATCONN ELECTRONIC CO.,LTD | | TITLE: 2.54mmPitch SIP Adapters DIP Special Pin Length 11.20mm | |
| TOLERANCE: ANGLE ±2° | PROJECTION | CUSTOMER: | CUSTOMER P/N: |
| X.XXX ±0.05 | DATE 2019/10/11 | 张伟 | N/A |
| X.XX ±0.25 | DRAWN | | |
| X.X ±0.35 | CHECKED | | |
| X. ±0.50 | APPROVED | | |
| | | PART NO.: | DRAWING NO.: |
| | | SIZE: A4 | PHA-NNN2-BP1120A |
| | | UNIT: mm | SCALE: 1:1 |
| | | | SHEET: 1/1 |