

REVISION DATA				
SYM	ECN	DESCRIPTION	DATE	APPROVED

Technical Data

Contact: brass JIS C3604(CuZn39Pb5)
 Insulator: black glass filled polyester,
 PPS-GF30-FR,UL94V-0

Plating: see ordering information

Current rating: 1A

Voltage rating: 40V RMS/60V DC

Contact resistance: 10mΩ max.

Insulation resistance: 1000MΩ min. at 100V AC

Capacitance: 1pF max.

Dielectric strength: 1000V RMS min.





Sleeve retention force: 2.5Kgf/contact min.

Mechanical life cycle: 200 cycles min.

Operating temperature: -55°C to +105°C

Soldering temperature: 245±5° SS

Critical Dimensions: ▼

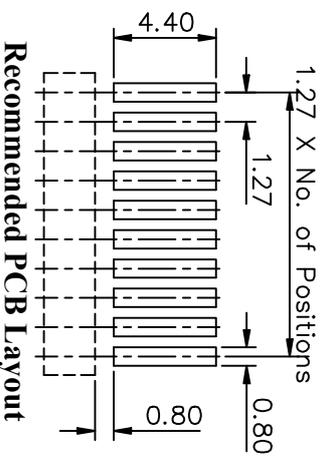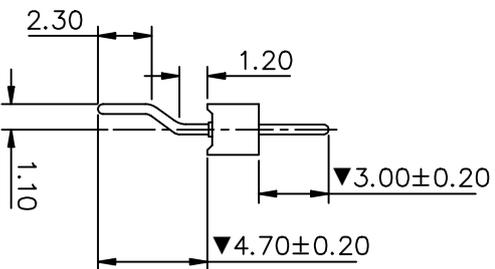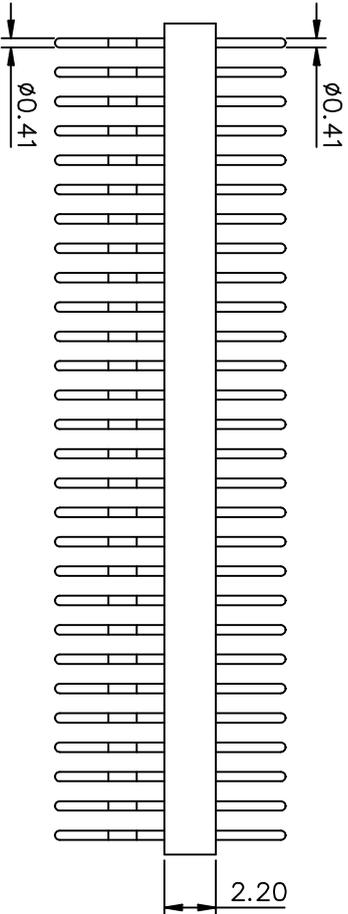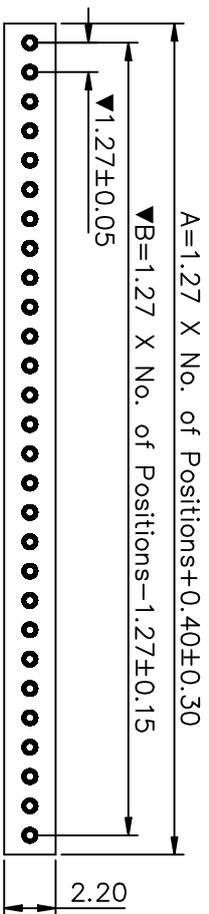

Ordering information(Part No.)

PED - NNN 1 - A P 1010B

No. of Positions	Insulator Type code	Pin Plating code
1	1 Single row	1 Tin150μ"
2	2 Double row	2 Tin200μ"
		3 GF
		4 Gold2μ"
		5 Gold3μ"
		6 Gold10μ"
		7 Gold15μ"
		S Special

Packing		natconn		广东纳特康电子股份有限公司	
1. General	√	GUANGDONG NATCONN ELECTRONIC CO.,LTD			
2. Tape&Reel		TOLERANCE:	PROJECTION	TITLE:	1.27mmPitch SIP Adapters SMT
3. Tube		ANGLE ±2°	DATE	2016/12/20	Pin Length 10.10mm
4. Tray		X.XXX ±0.05	DRAWN	雷邦军	
5. Other		X.XX ±0.15	CHECKED		
		X.X ±0.25	APPROVED		
		X. ±0.50			
			SIZE: A4	UNIT: mm	SCALE: 1:1
					SHEET: 1/1