CUSTOMER COPY

RoHS compliant

REVISION DATA				
SYM	ECN	DESCRIPTION	DATE	APPROVED

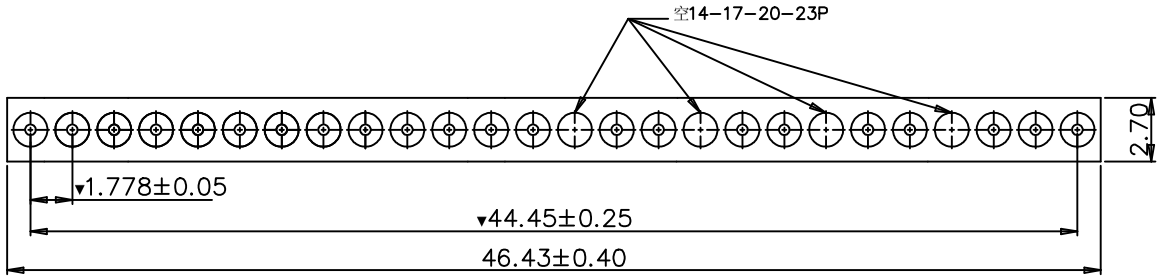

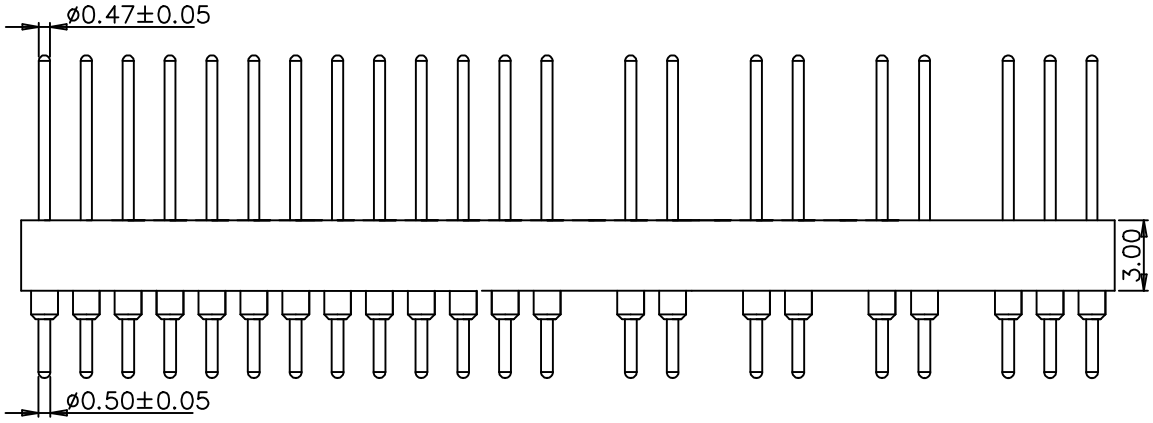

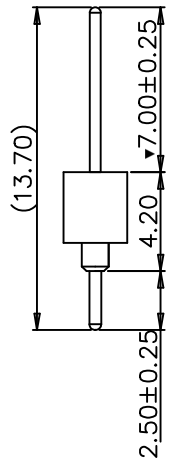

Technical Data

Contact:	brass JIS C3604(CuZn39Pb3)
Insulator:	black glass filled polyester, PPS-GF30-FR,UL94V-0
Plating:	see ordering information
Current rating:	1A
Voltage rating:	40VRMS/60V DC
Contact resistance:	10mΩ max.
Insulation resistance:	1000MΩ min. at 500V AC
Capacitance:	1pF max.
Dielectric strength:	1000VRMS min.
Sleeve retention force:	2.5Kgf/contact min.
Mechanical life cycle:	200 cycles min.
Operating temperature:	-55°C to+105°C
Soldering temperature:	245±5° 5S
Critical Dimensions:▼	

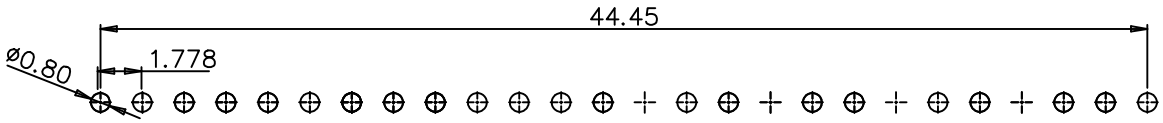

Recommended P.C.B Layout(±0.05)

Ordering information

PAA - 026 1 - A P 1370B

No. of Positions	Insulator Type code	Pin Plating code
001~040	1 Single row 2 Double row	3 G/F 4 Au 2μ" 5 Au 3μ" 6 Au 10μ" 7 Au 15μ" 8 Tin 120μ" S Special

Packing	
1.General	
2.Tape&Reel	
3.Tube	√
4.Tray	
5.Other	

natconn ® 广东纳特康电子股份有限公司
GUANGDONG NATCONN ELECTRONIC CO.,LTD

TOLERANCE:	PROJECTION		TITLE: Pitch1.778*H3.0mm Adapter Connector SIP Type Pin Length 13.70mm		
ANGLE ±2°	DATE	2019/04/01			
X.XXX ±0.05	DRAWN	MO	CUSTOMER: N/A	CUSTOMER P/N: N/A	REV: N/A
X.XX ±0.20	CHECKED		PART NO.:	DRAWING NO.: PAA-NNN1-AP1370B	REV: A
X.X ±0.30	APPROVED		SIZE: A4 / UNIT: mm	SCALE: 1:1	SHEET: 1/1
X. ±0.50					