


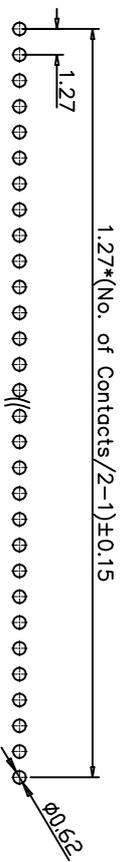


CUSTOMER COPY

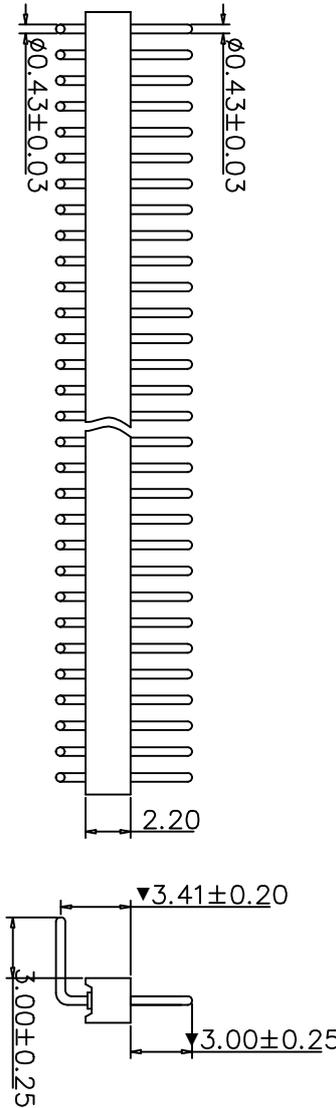

REVISION DATA				
SYM	ECN	DESCRIPTION	DATE	APPROVED

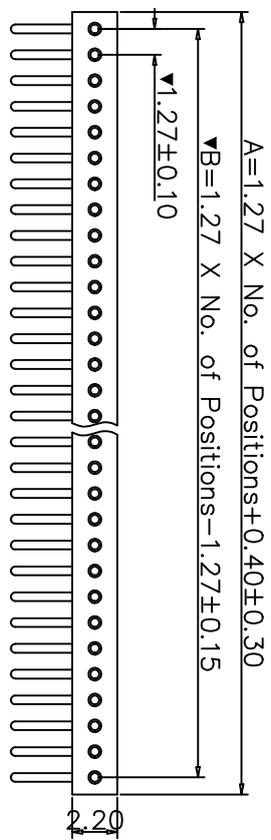

Recommended P.C.B
Layout(±0.05)

PEB - NNN 1 - A P 1030A

No. of Positions 01-50	Insulator Type code 1 Single row 2 Double row	Pin Plating code 1 Tin150µ" 2 Tin200µ" 3 GF 4 Gold2µ" 5 Gold3µ" 6 Gold10µ" 7 Gold15µ" S Special
---------------------------	---	---

Technical Data

Contact: brass JIS C3604(CuZn39Pb3)
Insulator: black glass filled polyester,
PPS-GF30-FR,UL94V-0
see ordering information

Plating: 1A
Current rating: 100V/RMS/100V DC
Voltage rating: 10mΩ max.
Contact resistance: 5000MΩ.min. at 500V AC
Insulation resistance: 1pF max.
Capacitance: 1000V/RMS min.
Dielectric strength: 2.5Kgf/contact min.
Sleeve retention force: -40°C to+105°C
Operating temperature: 245±5° SS
Soldering temperature: Critical Dimensions:▼

Packing		TOLERANCE: ANGLE ±2°		PROJECTION		TITLE: 1.27mmPitch SIP Adapters Right Angle	
1. General		X.XXX ±0.05	DATE	2010/04/01	CUSTOMER P/N:	N/A	REV: N/A
2. Tape&Reel		X.XX ±0.20	DRAWN	唐建平	PART NO.:	PEB-NNN1-AP1030A	REV: A
3. Tube	√	X.X ±0.30	CHECKED	雷邦军	SIZE:	A4	SCALE: 1:1
4. Tray		X. ±0.50	APPROVED	冯显东	UNIT:	mm	SHEET: 1/1
5. Other							

natconn

广东纳特康电子股份有限公司
GUANGDONG NATCONN ELECTRONIC CO.,LTD

