

CUSTOMER COPY







REVISION DATA				
SYM	ECN	DESCRIPTION	DATE	APPROVED

Technical Data

Contact: brass JIS C3604(CuZn39Pb5)  
 Insulator: black glass filled polyester, PPS-GF30-FR,UL94V-0  
 see ordering information

Plating: 40VRMS/60V DC  
 Current rating: 4mΩ max.  
 Voltage rating: 1000MΩ min. at 100V AC  
 Contact resistance: 1pF max.  
 Insulation resistance: 1000VRMS min.  
 Capacitance: 2.5Kgf/contact min.  
 Dielectric strength: -40°C to +105°C  
 Sleeve retention force: 245±5 SS  
 Operating temperature:  
 Solderability:  
 Critical Dimensions: ▼

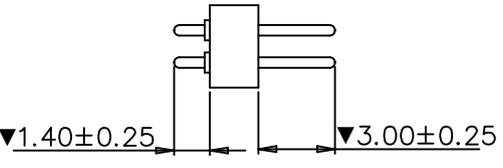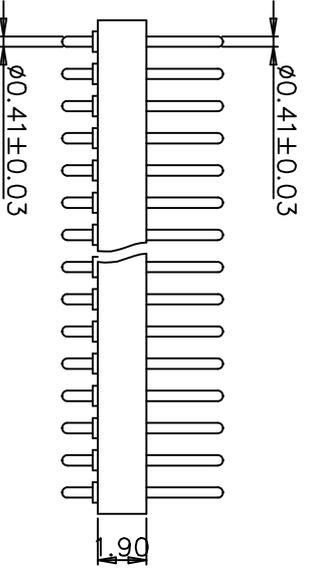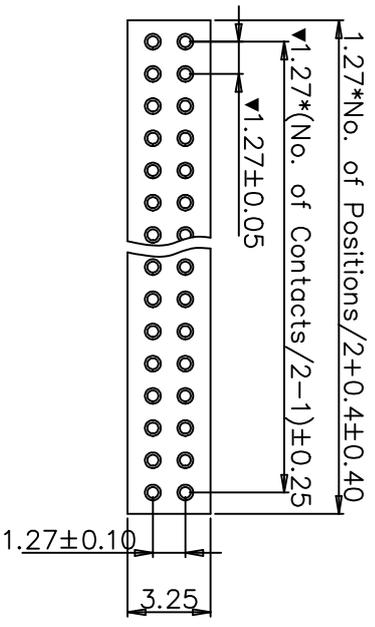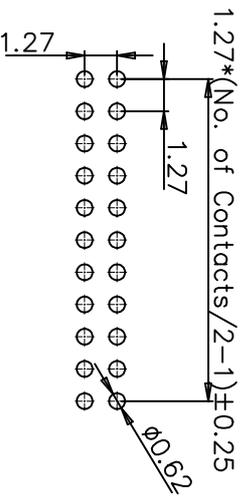

Ordering information  
**PEA - NNN 2 - A P 0630A**

No. of Positions 001-040	Insulator Type code 1 Single row 2 Double row	Pin Plating code 3 G/F 4 Au 2μ" 5 Au 3μ" 6 Au 10μ" 7 Au 15μ" 8 Tin 120μ" S Special
-----------------------------	---	---

Packing		TITLE: 1.27mmPitch SIP Adapters DIP Pin Length 6.3mm	
1. General	TOLERANCE: ANGLE ±2°	PROJECTION	CUSTOMER: N/A
2. Tape&Reel	X.XXX ±0.05	DATE: 2014/07/01	CUSTOMER P/N: N/A
3. Tube	X.XX ±0.20	DRAWN: 邹丽婷	DRAWING NO.: PEA-NNN2-AD0630A
4. Tray	X.X ±0.30	CHECKED: 于松	SCALE: 2:1
5. Other	X. ±0.50	APPROVED: 张丰志	SHEET: 1/1

**natconn** 广东纳特康电子股份有限公司  
 GUANGDONG NATCONN ELECTRONIC CO.,LTD

6 5 4 3 2 1