




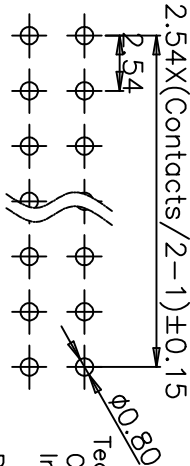


REVISION DATA				
SYM	ECN	DESCRIPTION	DATE	APPROVED

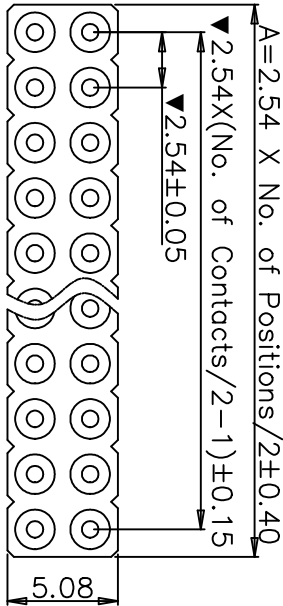

Technical Data
Contact:
Insulator:

brass JIS C3604(CuZn39Pb3)
black glass filled polyester,
PPS-GF30-FR,UL94V-0
see ordering information
3A
100V/RMS/150V DC
10mΩ max.
Contact resistance:
1000MΩ min. at 100V AC
1pF max.
Capacitance:
1000V/RMS min.
Dielectric strength:
2.5Kgf/contact min.
Sleeve retention force:
Operating temperature:
-40°C to+105°C
Solderability:
245±5° 5S
Critical Dimensions:▼

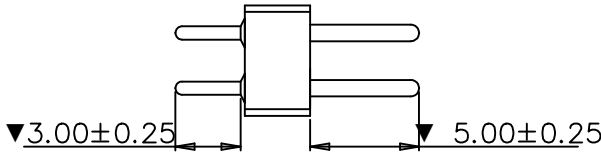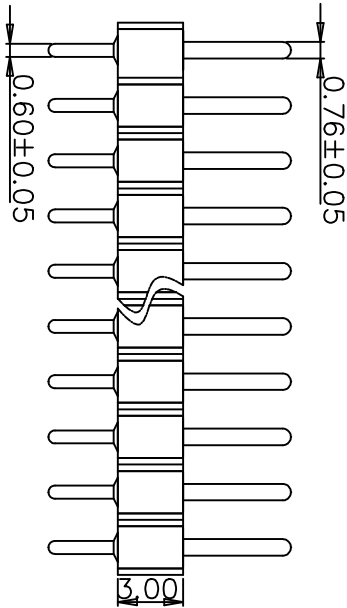

Ordering information

PHA - NNN 2 - B P 1120A

No. of Positions	Insulator Type code	Pin Plating code
1 Single row	1	1 Tin150μ"
2 Double row	2	2 Tin200μ"
		3 GF
		4 Gold2μ"
		5 Gold3μ"
		6 Gold10μ"
		7 Gold15μ"
		S Special

natconn® 广东纳特康电子股份有限公司
GUANGDONG NATCONN ELECTRONIC CO.,LTD

TOLERANCE:		PROJECTION		TITLE:	
ANGLE ±2°		DATE		2.54mmPitch SIP Adapters DIP Special Pin Length 11.20mm	
X.XXX ±0.05		DRAWN		CUSTOMER: N/A	
X.XX ±0.25		CHECKED		PART NO.: PHA-NNN2-BP1120A	
X.X ±0.35		APPROVED		SIZE: A4	
X. ±0.50				UNIT: mm	
				SCALE: 1:1	
				SHEET: 1/1	