
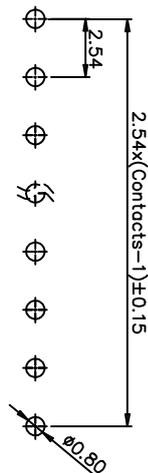



REVISION DATA				
SYM	ECN	DESCRIPTION	DATE	APPROVED

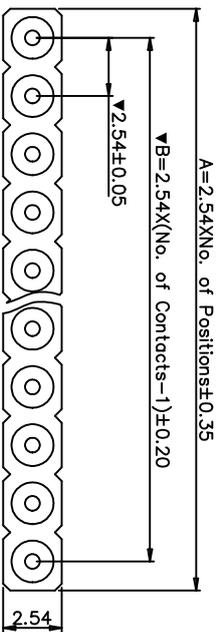

Recommended P.C.B
Layout(±0.05)

Technical Data
 Sleeve: brass JIS C3604(CuZn39Pb3)
 Insulator: black glass filled polyester, PPS-GF30-FR,UL94V-0
 see ordering information

Plating:
 Current rating: 100VRMS/150VDC
 Voltage rating: 10mΩ max.
 Contact resistance: 1000MΩ min. at 100VAC
 Insulation resistance: 1pF max.
 Capacitance: 1000VRMS/minute min.
 Dielectric strength: 2.5Kgf/contact min.
 Sleeve retention force: -55°C to+105°C
 Operating temperature: 245±5° 5S
 Solderability: Critical Dimensions: ▼

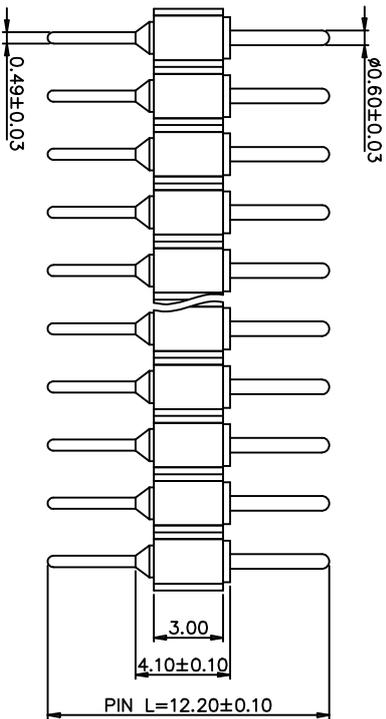

Ordering information

PHA - NNN 1 - E P 1220A

No. of Positions	Insulator Type code	Pin Plating code
1	1 Single row	3 GF 4 Gold2μ" 5 Gold3μ" 6 Gold10μ" 7 Gold15μ" 8 Tin120μ" S Special

Packing		natconn 广东纳特康电子股份有限公司		GUANGDONG NATCONN ELECTRONIC CO.,LTD	
1. General	✓	TOLERANCE:	ANGLE ±2°	PROTECTION	
2. Tape&Reel		DATE	2016/03/14	TITLE:	2.54mmPitch SIP Adapters DIP
3. Tube	✓	DRAWN	雷邦军	CUSTOMER:	N/A
4. Tray		CHECKED		PART NO.:	PHA-NNN1-BP1220A
5. Other		APPROVED		DRAWING NO.:	PHA-NNN1-BP1220A
				REV:	A
				SCALE:	1:1
				SHEET:	1/1