REVISION DATA				
SYM	ECN	DESCRIPTION	DATE	APPROVED

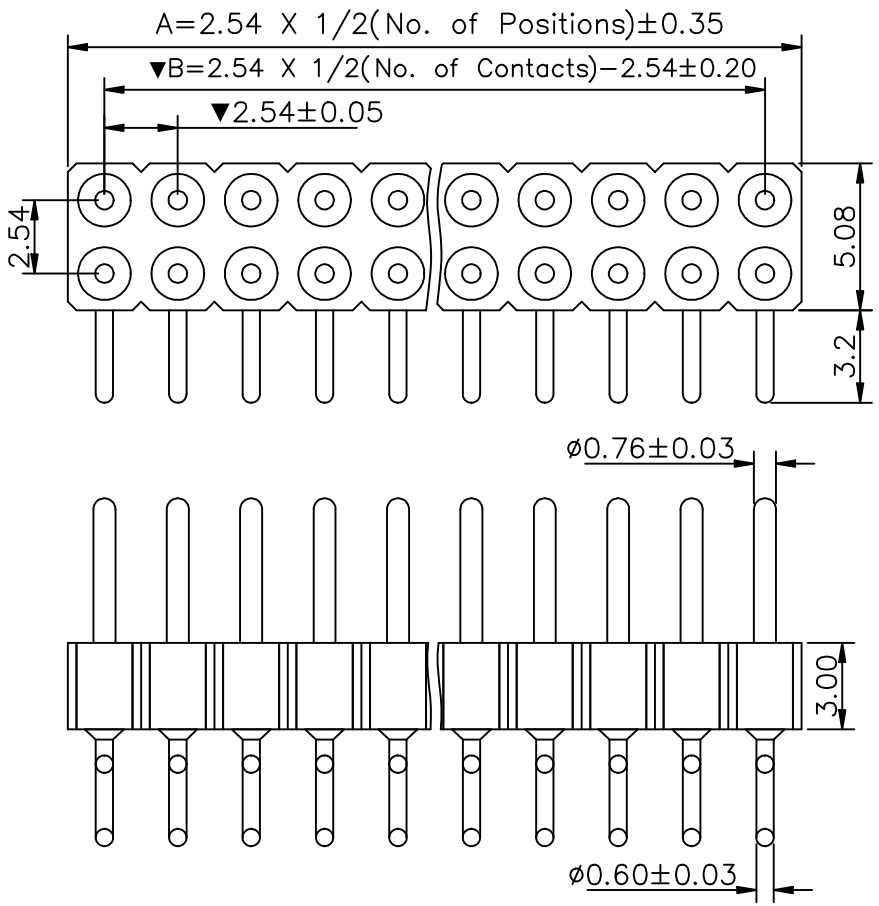

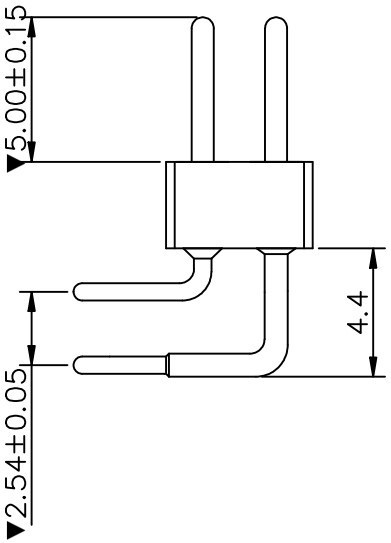

Technical Data

Sleeve:	brass CuZn38Pb2
Insulator:	PPS−GF30−FR,UL94V−0
Plating:	see ordering information
Current rating:	3A
Voltage rating:	40VRMS/60VDC
Contact resistance:	10mΩ max.
Insulation resistance:	1000MΩ min. at 100VAC
Operating temperature:	−55°C to+105°C
Soldering temperature:	260±5° 5S
Critical Dimensions:▼	

Ordering information

PHB - NNN X - B P 1362A

- NNN: No. of Positions
- X: Insulator Type code
  - 1 Single row
  - 2 Double row
- P: Pin Plating code
  - 1 Tin150μ"
  - 2 Tin200μ"
  - 3 GF
  - 4 Gold2μ"
  - 5 Gold3μ"
  - 6 Gold10μ"
  - 7 Gold15μ"
  - S Special

Packing	
1.General	
2.Tape&Reel	
3.Tube	√
4.Tray	
5.Other	

natconn ® 广东纳特康电子股份有限公司
GUANGDONG NATCONN ELECTRONIC CO.,LTD

TOLERANCE:	PROJECTI0N		TITLE: 2.54mmPitch SIP Adapters 90° Pin Length 13.62mm		
ANGLE ±2°	DATE	2016/02/23			
X.XXX ±0.05	DRAWN	雷邦军	CUSTOMER: N/A	CUSTOMER P/N: N/A	REV: N/A
X.XX ±0.15	CHECKED		PART NO.:	DRAWING NO.: PHB-NNN2-BP1362A	REV: A
X.X ±0.25	APPROVED		SIZE: A4 / UNIT: mm	SCALE: 1:1	SHEET: 1/1
X. ±0.50					