

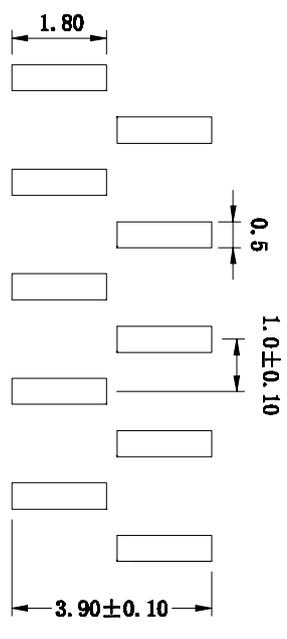



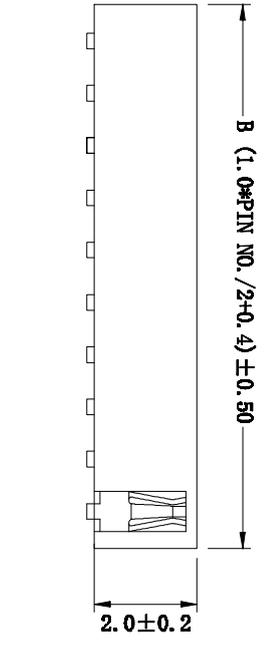

REVISION DATA				
SYM	ECN	DESCRIPTION	DATE	APPROVED

**Specifications:**

Current rating:1.0A AC,DC  
 Voltage rating:50V AC, DC  
 Contact resistance:20m ohm Max  
 Insulation resistance:1000M ohm Min  
 Withstanding voltage:AC 500V AC/minute  
 Operating Temperature:-40°C ~ +105°C  
 Materials:  
 Insulator:High Temp Plastic (Nylon 9T UL94V-0)  
 Insulator Color:Black  
 Contact:Phosphor Bronze  
 Finish:Gold Plated

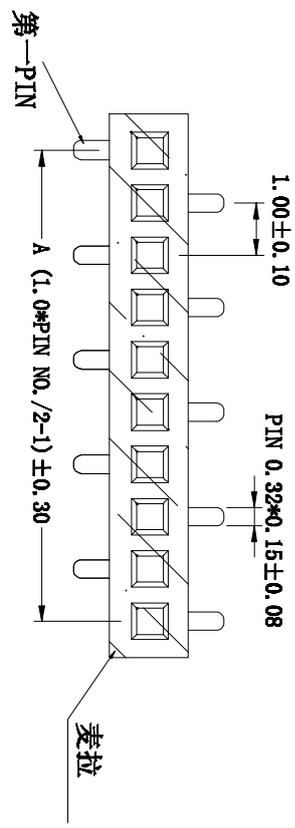

PCB Layout

305 - FH 10 X G A 136

No. of Positions 00-99	Plating Option A GF/“ B Au/“ C Au/“ D Au/“ H GF/5u“ S Sn/20u“ Z Special	Insulator Material Option A PBT B PA66 C PA6T D PA46 E PPS F LCP G PA6T H PC Z Special	Color A BLACK B GREY C BEIGE D WHITE E NATURAL	Serial NO. 001-999
---------------------------	--	--	---	-----------------------

Packing		TITLE:		CUSTOMER P/N:		REV:	
1.General	√	1.0mm PCB Socket Single Row Straight Type		N/A		N/A	
2. Reel		DRAWN		PART NO.:		REV:	
3. Tube		DATE		N/A		N/A	
4. Tray		CHECKED		DRAWING NO.:		REV:	
5. Other		APPROVED		NTC-FH10XGA136		A	
TOLERANCE:		DATE		SCALE:		SHEET:	
ANGLE ±2°		2025/06/19		1:1		1/1	
X.XXX ±0.15		DRAWN		SCALE:		SHEET:	
X.XX ±0.30		CHECKED		SCALE:		SHEET:	
X.X ±0.40		APPROVED		SCALE:		SHEET:	
X. ±0.40		APPROVED		SCALE:		SHEET:	

**natconn** 广东纳特康电子股份有限公司  
 GUANGDONG NATCONN ELECTRONIC CO.,LTD