



CUSTOMER COPY



REVISION DATA				
SYM	ECN	DESCRIPTION	DATE	APPROVED

**Technical Data**

Contact: brass JIS C3604(CuZn39Pb3)  
 Insulator: black glass filled polyester, PBT-GF30-FR,UL94V-0  
 Plating: TIn 150u" OVER Ni 50u"  
 Current rating: 5.0A  
 Voltage rating: 36VAC DC  
 Contact resistance: 30mΩ max.  
 Insulation resistance: 1000MΩ min. at 300V AC  
 Capacitance: 1pF max.  
 Dielectric strength: 500V/RMS min.  
 Sleeve retention force: 1.0Kgf/contact min.  
 Operating temperature: -40°C to +85°C  
 Solderability: 245±5° 10S  
 Critical Dimensions: ▼

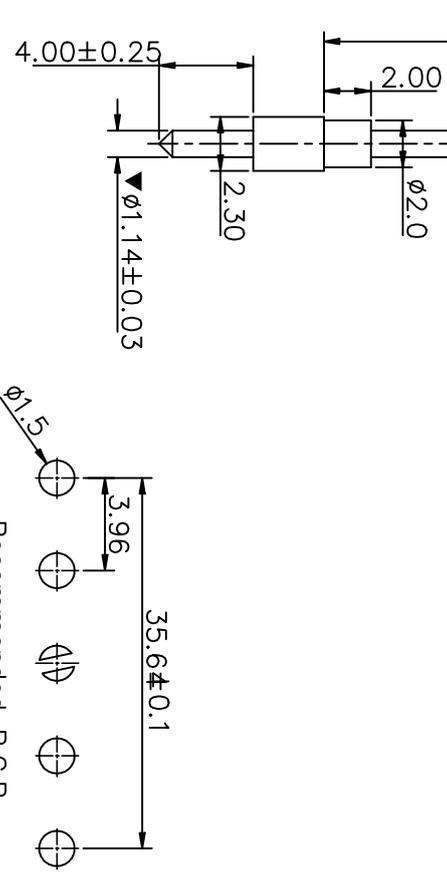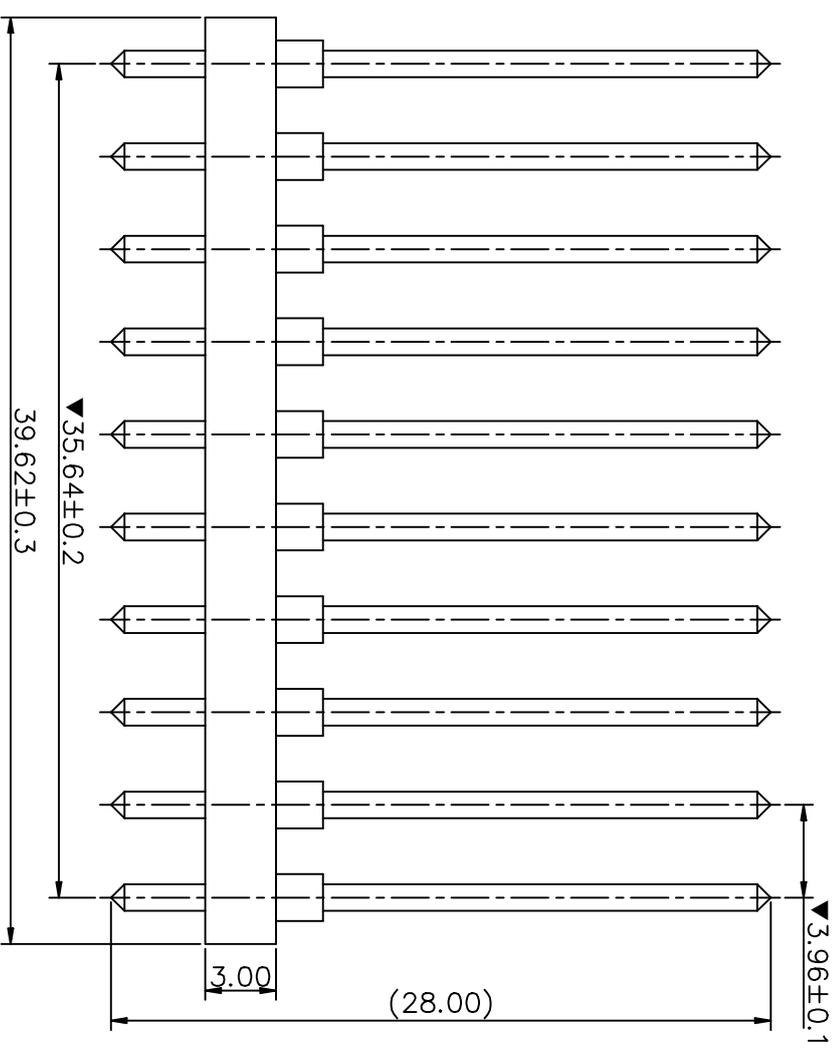

**Ordering information**

PZA-010 1 - M P 2800A

No. of Positions	Insulator Type code	Pin Plating code
1	1 Single row	1 Tin150u"
2	2 Double row	2 Tin200u"
		3 GF
		4 Gold2u"
		5 Gold3u"
		6 Gold10u"
		7 Gold15u"
		8 Special

Packing		TOLERANCE: ANGLE ±2°		TITLE: 3.96mm Pitch SIP Adapters DIP	
1. General	√	PROJECTION	DATE	CUSTOMER: NA	CUSTOMER P/N: NA
2. Tape & Reel		DATE	2022.02.22	PART NO.: N/A	DRAWING NO.: PZA-0101-MP2800A
3. Tube		DRAWN	莫健勇	SIZE: A4	SCALE: 1:1
4. Tray		CHECKED	张伟	UNIT: mm	SHEET: 1/1
5. Other		APPROVED	冯显东		

**natconn** 广东纳特康电子股份有限公司  
GUANGDONG NATCONN ELECTRONIC CO.,LTD

6 5 4 3 2 1