



CUSTOMER COPY

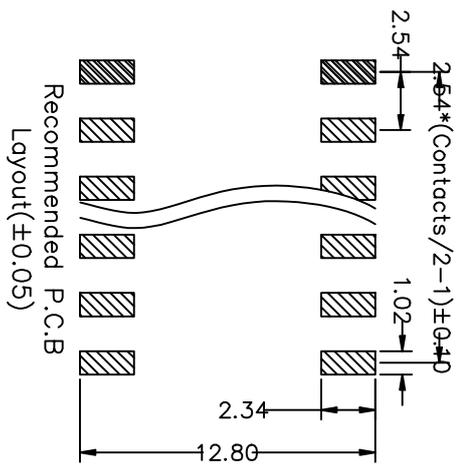


REVISION DATA				
SYM	ECN	DESCRIPTION	DATE	APPROVED

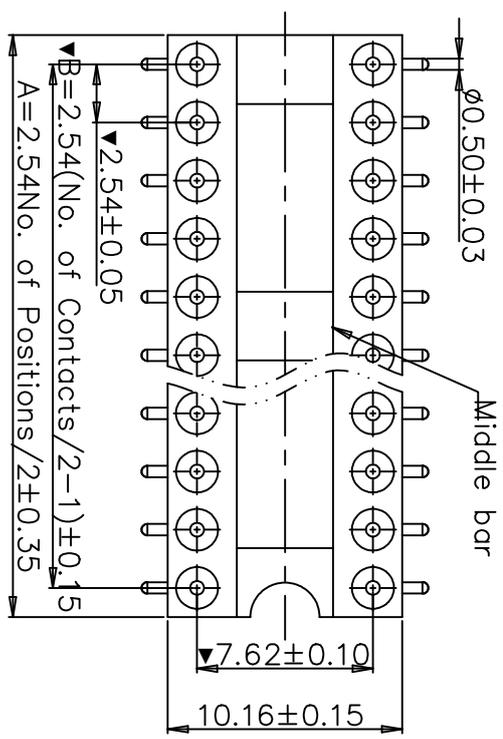

**Technical Data**  
 Contact: brass JIS C3604(CuZn39Pb3)  
 Insulator: black glass filled polyester, PPS-GF30-FR,UL94V-0  
 see ordering information  
**Plating:** 3A  
**Current rating:** 100V/RMS/150V DC  
**Voltage rating:** 10m $\Omega$  max.  
**Contact resistance:** 5000M $\Omega$  min. at 500V AC  
**Insulation resistance:** 1pF max.  
**Capacitance:** 1000V/RMS min.  
**Dielectric strength:** 2.5Kgf/contact min.  
**Sleeve retention force:** -55°C to+105°C  
**Operating temperature:** 245 $\pm$ 5° 5S  
**Solderability:** Critical Dimensions: ▼

No. of Positions	DIM"A"	DIM"B"	Middle bar
04	5.08	2.54	none
06	7.62	5.08	none
08	10.16	7.62	none
10	12.70	10.16	none
14	17.78	15.24	none
16	20.32	17.78	none
18	22.86	20.32	none / 1pc
20	25.40	22.86	none / 1pc
22	27.94	25.40	1pc
24	30.48	27.94	1pc
28	35.56	33.02	none / 1pc

with middle bar is standard

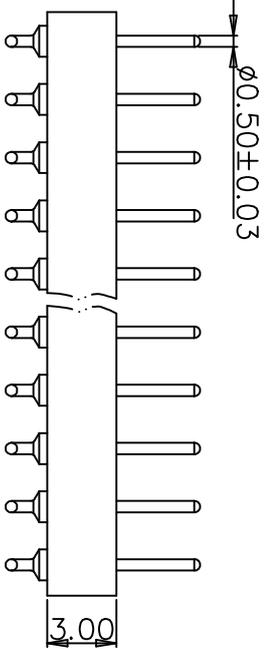

Ordering information  
**PHD - NNN 3 - B P 1000A**

No. of Positions 004,006,008,010, 014,016,018,020, 022,024,028	Row spacing code 3 7.62mm	Pin Plating code 3 G/F 4 Au 2 $\mu$ " 5 Au 3 $\mu$ " 6 Au 10 $\mu$ " 7 Au 15 $\mu$ " 8 Tin 120 $\mu$ " 9 Au 5 $\mu$ " S Special
---	------------------------------	---

**Packing**

1. General	
2. Tape&Reel	
3. Tube	✓
4. Tray	
5. Other	

**natconn**

**广东纳特康电子股份有限公司**  
 GUANGDONG NATCONN ELECTRONIC CO.,LTD

TOLERANCE: ANGLE $\pm$ 2°	PROJECTION	TITLE:
X.XXX $\pm$ 0.05	DATE: 2014/05/22	Pitch2.54mm Adapter Connector SMT Type Pin Length 10.00mm
X.XX $\pm$ 0.20	DRAWN: 邹丽婷	CUSTOMER: N/A
X.X $\pm$ 0.30	CHECKED: 于松	PARTNO.: PHD-NNN3-BP1000A
X. $\pm$ 0.50	APPROVED: 张丰志	DRAWING NO.: PHD-NNN3-BP1000A
		SCALE: 1:1
		SHEET: 1/1

