

REVISION DATA				
SYM	ECN	DESCRIPTION	DATE	APPROVED

技术参数

材料：  
端子：黄铜  
电镀：镀金或镀锡，镍底50u"以上。  
塑胶：PA46+30%G.F UL94V-0





电气参数：

额定电流：1安  
接触电阻：最大20mΩ。  
绝缘电阻：1000MΩ  
耐压：300V交流电/分钟

机械性能：

针脚：SQ 0.46毫米  
插入力：<200g。  
拔出力：≥20g。  
机械寿命：最小200次  
工作温度：镀金：-55°C至+105°C  
              镀锡：-40°C至+105°C  
焊接温度：245°C±5°C 5秒  
关键尺寸：▼

Recommended P.C.B  
Layout(±0.05)

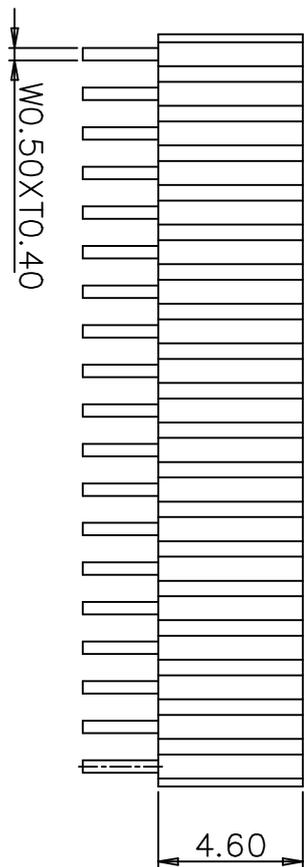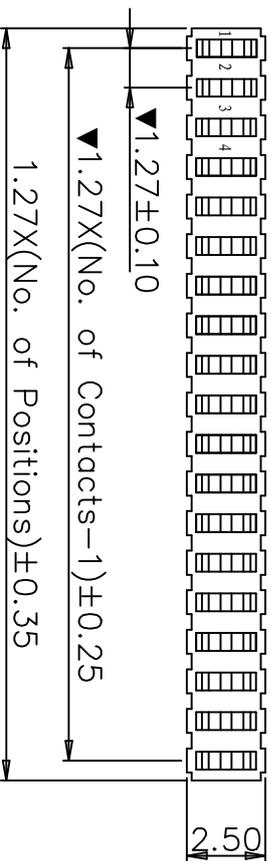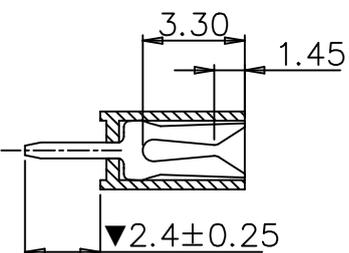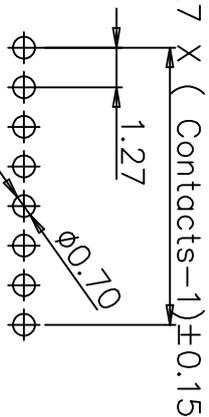

Ordering information

FEA1	46	0	Y	XX	X	X	A	02
	High Option 46±4.6mm			No. of Positions 03-50	Paling Option A: GIE B: Ausp. C: Ausp. D: Crisp E: Crisp 20u" Z: Special (Underline option is standard)	Insulator Material Option A: BK-PP F: BK-PP G: BK-PAET S: Special (Underline option is standard, include all insulators)	Insulator Material Option A: Wini Cap	Serial No. 01-99

Packing

1. General	√
2. Tape&Reel	
3. Tube	
4. Tray	
5. Other	

natconn

广东纳特康电子股份有限公司  
GUANGDONG NATCONN ELECTRONIC CO.,LTD

TOLERANCE:

ANGLE ±2°  
X.XXX ±0.05  
X.XX ±0.20  
X.X ±0.30  
X. ±0.50

PROJECTION

DATE: 2023/06/27

DRAWN: 张国灵

CHECKED

APPROVED

TITLE:

排母 间距1.27 塑高4.60

CUSTOMER: N/A

PARTNO.: FEAI460YA02

SIZE: A4 UNIT: mm SCALE: 1:1 SHEET: 1/1

A

B

C

D

6

5

4

3

2

1