






CUSTOMER COPY

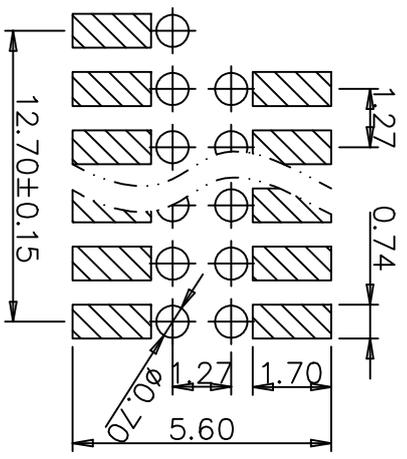

REVISION DATA				
SYM	ECN	DESCRIPTION	DATE	APPROVED

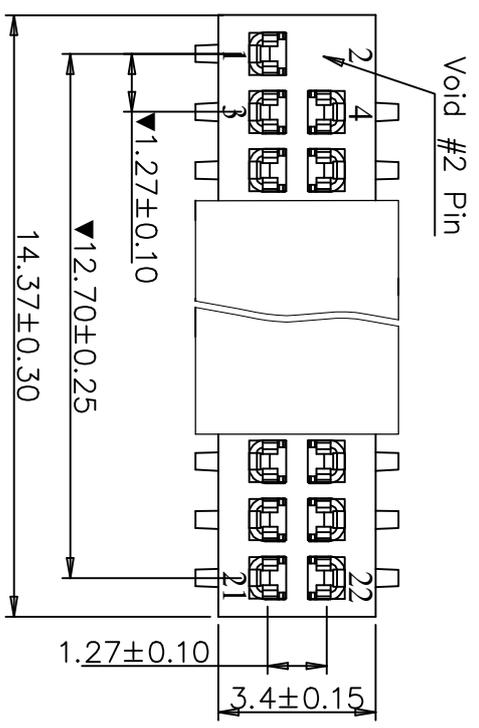

Recommended P.C.B
Layout(±0.05)

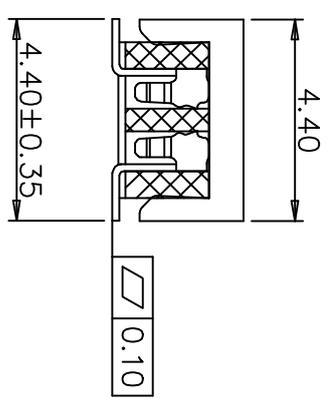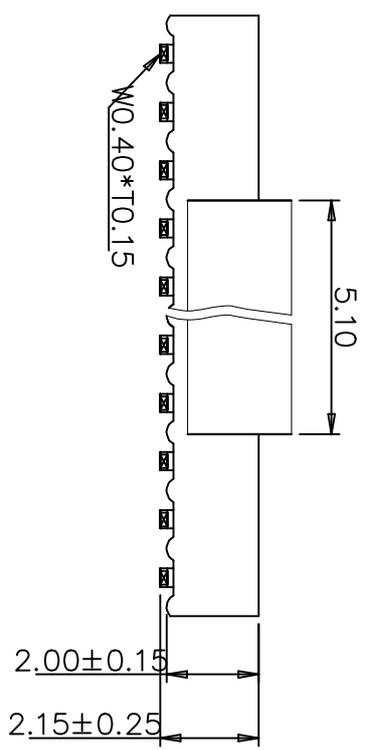

Technical Data
 Contact: brass C2680(Cuzn36)
 Contact plating: see ordering information
 Insulator: PA9T UL94V-0 stainless steel
 Cap: 1Amps
 Current rating: 20mΩ max.
 Contact resistance: 1000MΩ min. at 100V
 Insulation resistance: 300V AC/minute
 Withstanding Voltage: 0.5Kgf/contact min.
 Retention force: -55°C to+105°C
 Operating temperature: 260C±5° 5S
 Soldering temperature:
 Critical Dimensions: ▼

Ordering information

FED2 20 0 - U 22 X G C 07

High Option 20=2.0mm

No. of Positions 10 to 100

Plating Option
 A Gf
 B AuSp
 C AuSp
 D Au/10u
 H Gf/Sn120u
 Z Special

Insulator Material Option
 C BK-PA6T
 F BK-LCP
 G BK-PA6T
 S Special

Serial No. 01-999

Packing	
1. General	
2. Tape&Reel	✓
3. Tube	
4. Tray	
5. Other	

natconn		广东纳特康电子股份有限公司	
GUANGDONG NATCONN ELECTRONIC CO.,LTD			
TOLERANCE:	ANGLE ±2°	PROJECTION	
	X.XXX ±0.05	DATE	2014/08/09
	X.XX ±0.25	DRAWN	邹丽婷
	X.X ±0.35	CHECKED	于松
	X. ±0.50	APPROVED	张丰志
TITLE:	Pitch1.27mm Female Header Dual Row SMT Type W/ CAP H=2.0,Top Insert	CUSTOMER:	N/A
		CUSTOMER P/N:	N/A
		DRAWING NO.:	FED22000GC07
		SCALE:	1:1
		SHEET:	1/1