



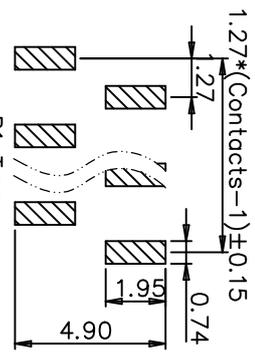



REVISION DATA				
SYM	ECN	DESCRIPTION	DATE	APPROVED

Technical Data
 Contact: phosphor bronze JIS C5191(Cusn6)
 Contact plating: see ordering information
 Insulator: black glass filled polyester
 UL94V-0

Current rating: 1Amps
 Contact resistance: 20mΩ max.
 Insulation resistance: 1000MΩ min. at 100V
 Withstanding Voltage: 300V AC/minute
 Lead size pin: 0.4mm SQ
 Average insertion force: 100g/contact max.
 Average withdrawal force: 40g/contact min.
 Retention force: 0.35Kg/contact min.
 Mechanical life cycle: min.200
 Operating temperature: -55°C to +105°C
 Soldering temperature: 260°C±5 5S
 Critical Dimensions: ▼

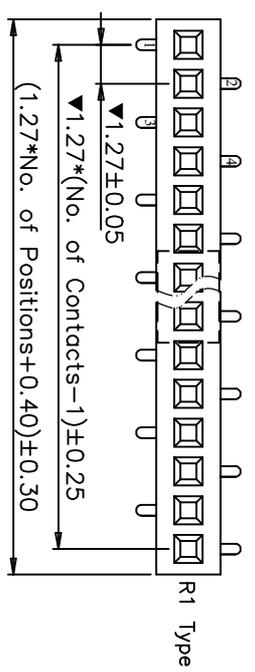

Recommended P.C.B
 Layout(±0.05)

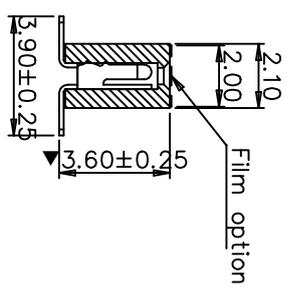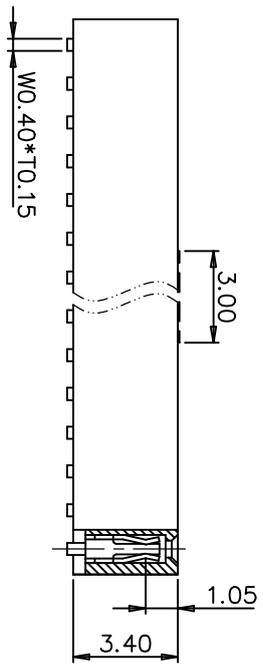

Ordering information

FED1 34 0 - U XX X X F 01

High Option 34-3.4mm

No. of Positions 02-50

Plating Option
 A: Gf
 B: Au3P
 C: Au3P
 H: GFSn120P
 S: Sn120P
 Z: Special (Underline option is standard)

Insulator Material
 C: BK-PART
 F: BK-COP
 G: BK-PART
 S: Special (Underline option include all insulators)

Type Option F: With Film

Serial No 01 R1 type

Packing	
1. General	
2. Tape&Reel	✓
3. Tube	✓
4. Tray	
5. Other	

natconn 广东纳特康电子股份有限公司
 GUANGDONG NATCONN ELECTRONIC CO.,LTD

TOLERANCE: ANGLE ±2°		PROJECTION		TITLE:	
DATE	2015/10/20	CUSTOMER:	N/A	CUSTOMER P/N:	N/A
DRAWN	雷邦军	PARTNO.:		DRAWING NO.:	FED1340UF01
CHECKED	唐建平	SIZE:	A4	SCALE:	1:1
APPROVED	冯显东	UNIT:	mm	SHEET:	1/1