



REVISION DATA				
SYM	ECN	DESCRIPTION	DATE	APPROVED
		变更排针塑胶的插入方向	11-22-10'	che

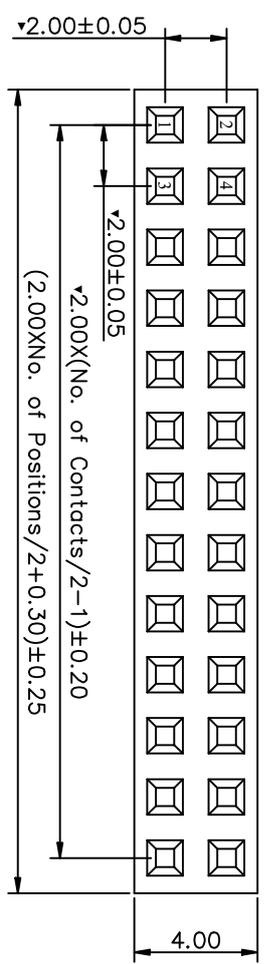


Technical Data
 Contact: brass JIS C2680(CuZn35)
 Contact plating: see ordering information
 Insulator: black glass filled polyester
 UL94V-0

Current rating: 1.5Amps
 Contact resistance: 20mΩ max.
 Insulation resistance: 1000MΩ min. at 100V
 Withstanding Voltage: 450V AC/minute
 Lead size pin: 0.50mm SQ
 Average insertion force: 160g/contact max.
 Average withdrawal force: 50g/contact min.
 Retention force: 0.5Kg/contact min.
 Mechanical life cycle: min:200
 Operating temperature: -55°C to+105°C
 Soldering temperature: 245°C±5° 5S
 Critical Dimensions:▼

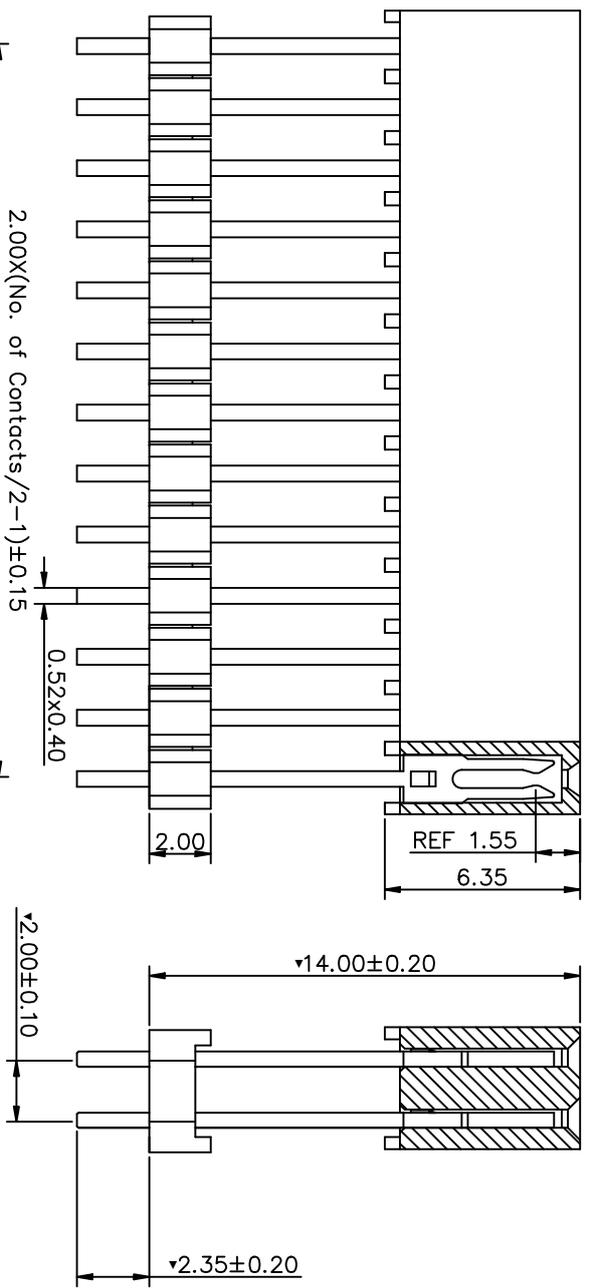

Recommended PCB Hole Layout

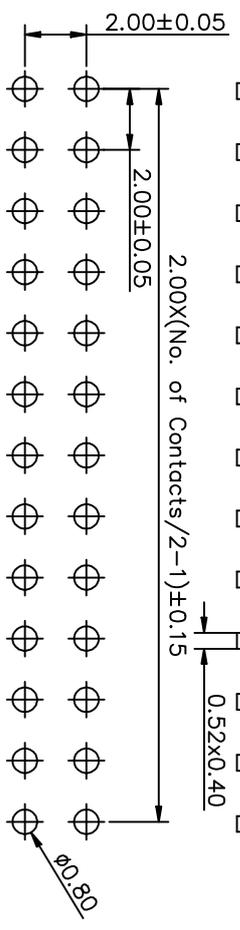

Ordering information

FFA2 63 1 Y XX X X A 12

High Option 63±0.3mm	No. of Positions 04-80	Plating Option A: G.F. B: Au3μ" C: Au10μ" D: G.F/Sr120μ" H: Sn120μ" Z: Special (Underline option is standard)	Insulator Material Option A: BK-CPBT G: BK-PA3T S: Special (Underline option is standard, include all insulators)	Insulator Material Option A: Normal	Serial No. 01-999
-------------------------	---------------------------	---	--	--	----------------------

Packing

1. General	
2. Tape & Reel	
3. Tube	
4. Tray	<input checked="" type="checkbox"/>
5. Other	

natconn ® 广东纳特康电子股份有限公司
 GUANGDONG NATCONN ELECTRONIC CO.,LTD

TOLERANCE: ANGLE ±2°		PROJECTION		TITLE: 2.00*2.00mm Female Header Dual Row Straight H=6.35mm, DIP2.35mm	
DATE	2015/10/12	CUSTOMER:	N/A	CUSTOMER P/N:	N/A
DRAWN	雷邦军	PART NO.:		DRAWING NO.:	FFA261YXXACA12
CHECKED		REV:	N/A	REV:	B
APPROVED		SIZE:	A4	UNIT:	mm
		SCALE:	1:1	SHEET:	1/1