
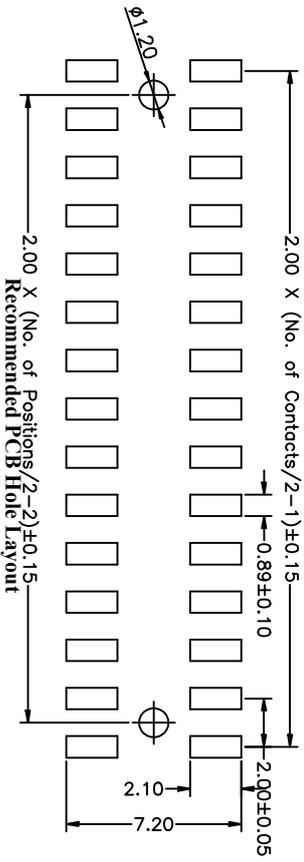
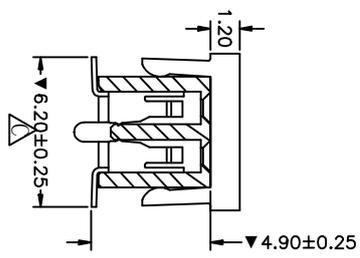
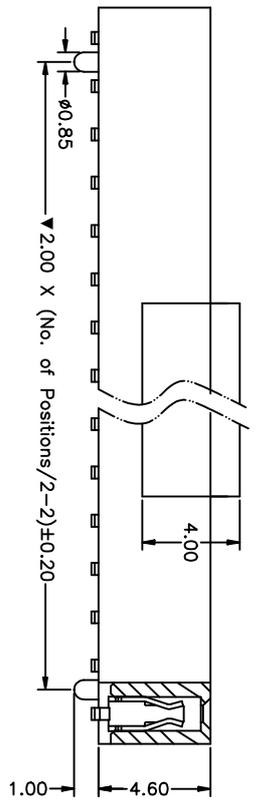


REVISION DATA				
SYM	ECN	DESCRIPTION	DATE	APPROVED
C		按实物修正尺寸	2025.8.26	

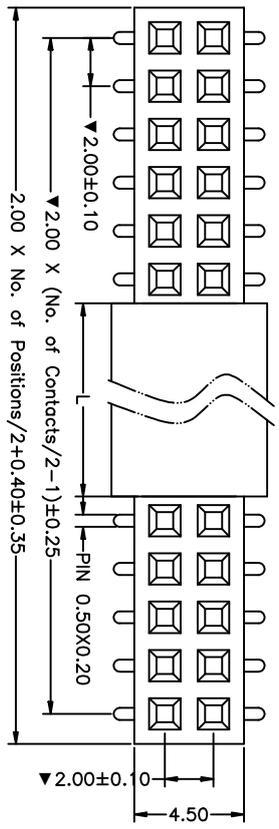

No. of positions	dim. L
2*2P / 2*4P	8.0
2*2P / 2*3P	4.0

技术参数:  
 五金: 磷铜 C5191  
 接触镀层: 见订购信息  
 绝缘体: 见订购信息 黑色UL94V-0  
 当前额定值: 3安培  
 接触电阻: 最大20mΩ  
 绝缘电阻: 100V时最小1000MΩ  
 耐受电压: 300V AC/分钟  
 适配针: S00.5  
 插入力: 200g最大值  
 拔出力: 60g最小值  
 保持力: 0.6Kg最小值  
 寿命: 200次 最小  
 工作温度: -40°C至+105°C  
 焊接温度: 260°C±5°C 5S  
 关键尺寸: ▼

Ordering information(Part No.)

FDD2 46 0 - U XX X X D 001

High Option 45=4.3mm

No. of Positions 04-80

Packing Option  
 A G1F  
 B A05P  
 C A05P  
 D GF5S120P  
 S Srt120P  
 Z Special (Underline option is standard)

Insulator Material  
 F BK-LCP  
 G BKCPABT  
 S Special (Underline option is standard, all include all insulators)

Insulator Material  
 A Normal  
 C With Cap  
 D W/Prg  
 K&Cap

Serial No. 001-899

Packing

1. General	
2. Tape & Reel	
3. Tube	✓
4. Tray	
5. Other	

natconn

广东纳特康电子股份有限公司  
 GUANGDONG NATCONN ELECTRONIC CO.,LTD

TOLERANCE:	PROJECTION	TITLE:
ANGLE ±2°		2.00*2.00mm Female Header Dual Row
X.XXX ±0.05	DATE 2025.8.26	SMT H=4.6mm W/POST W=4.6, W2=6.2
X.XX ±0.25	DRAWN	CUSTOMER: na
X.X ±0.35	CHECKED	PART NO.:
X. ±0.50	APPROVED	CUSTOMER P/N:
		DRAWING NO.: FFD2460UD001
		REV: C
		SCALE: 1:1 SHEET: 1/1