
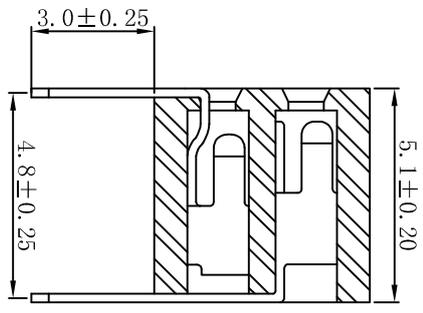
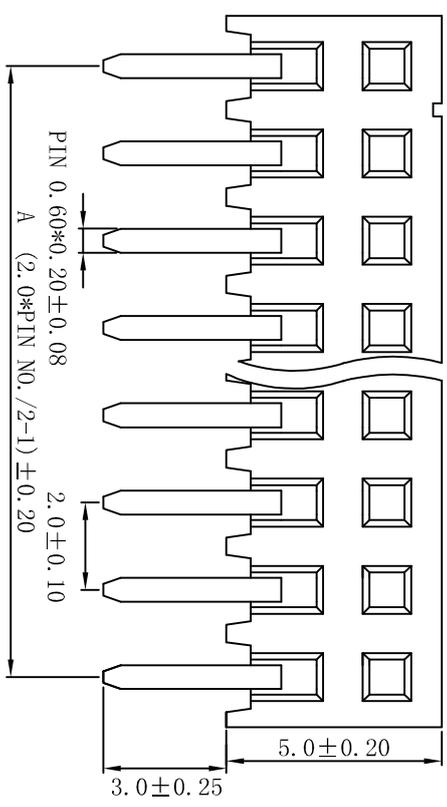
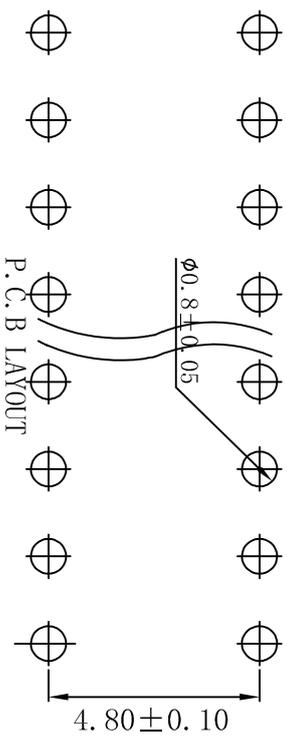


REVISION DATA				
SYM	ECN	DESCRIPTION	DATE	APPROVED

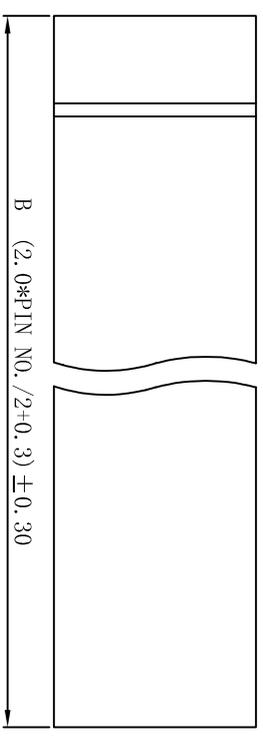

**SPECIFICATION**

Current Rating : 2A  
 Voltage rating : 250V AC DC  
 Insulator Resistance : 1000MΩ Min.  
 Contact Resistance : 20mΩ Max.  
 Dielectric Withstanding : AC 500V  
 Voltage rating : 250V AC  
 Operating Temperature : -40°C To +105°C  
 Contact Material : Polyester, UL 94V-0  
 Insulator Material : C5191  
 Standard : NL6T+30%G, F(Black)  
 Standard : Gold Flash ALL Over Nickel

**Ordering information**

FFB2 50 0 - U XX X X A 03

High Option 50-5.0mm	No. of Positions 06-60	Plating Option A: GFB B: Au/P C: Au/10μ D: Au/10μ H: GFB/120μ S: Sn120μ Z: Special (Underline option is standard)	Insulator Material Option C: BK-PAET F: BK-LCP G: BK-PAET S: Special (Underline option is standard, insulators)	Type Option A: Normal B: With pkg	Serial No. 01-999
-------------------------	---------------------------	--	---	---	----------------------

<b>Packing</b>		✓		<p><b>natconn</b> 广东纳特康电子股份有限公司                  GUANGDONG NATCONN ELECTRONIC CO.,LTD</p>		
<b>1. General</b>	TOLERANCE:	ANGLE ±2°	PROJECTION			TITLE:
<b>2. Tape&amp;Reel</b>		X,XXX ±0.01	DATE			2024.8.14
<b>3. Tube</b>		X,XX ±0.25	DRAWN			莫健勇
<b>4. Tray</b>		X,X ±0.30	CHECKED			郑双平
<b>5. Other</b>		X, ±0.40	APPROVED	冯显东		
TITLE:		Pitch:2.00*H:5.0mm Female Header Dual Row DIP Type		CUSTOMER P/N:	N/A	
CUSTOMER:		N/A		DRAWING NO.:	FFB2500U/A03	
PART NO.:		N/A		REV.:	N/A	
SIZE:		A4		SCALE:	1:1	
UNIT:		mm		SHEET:	1/1	