

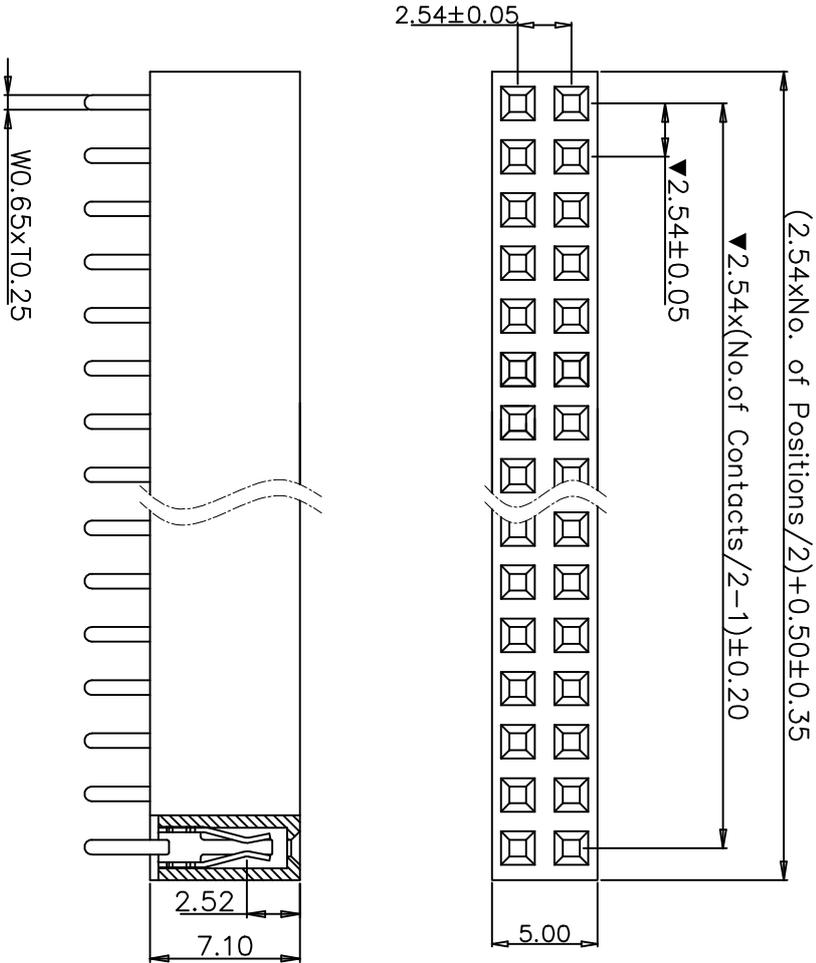


REVISION DATA				
SYM	ECN	DESCRIPTION	DATE	APPROVED

Technical Data
 Contact: brass JIS C5191 (CuSn6)
 Contact plating: see ordering information
 Insulator: black glass filled polyester
 UL94V-0

Current rating: 3Amps
 Contact resistance: 20mΩ max.
 Insulation resistance: 1000MΩ min. at 100V
 Withstanding Voltage: 550V AC/minute
 Lead size pin: 0.64mm SQ
 Average insertion force: 200g/contact max.
 Average withdrawal force: 60g/contact min.
 Retention force: 0.6kg/contact min.
 Mechanical life cycle: min.200
 Operating temperature: -55°C to +105°C
 Soldering temperature: 245°C±5° 5S
 Critical Dimensions: ▼

Recommended P.C.B
 Layout(±0.05)

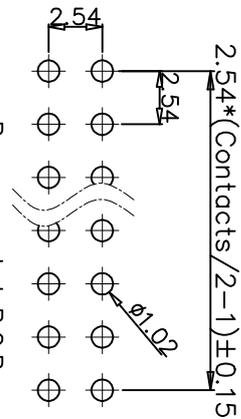

Ordering information

FHA2	71	0	-U	XX	X	X	A	01
High Option 71=7.1mm	No. of Positions 04-80	Plating Option A: GFE B: Au30" C: Au10" D: GFS/ni 20" S: Sn120u" Z: Special (Underline option is standard)	Insulator Material Option A: BK-PBT F: BK-LCP G: BK-PA9T S: Special (Underline option is standard. include all insulators)	Insulator Material Option A: Normal C: With Cap	Serial No. 01-99			

natconn ® 广东纳特康电子股份有限公司
 GUANGDONG NATCONN ELECTRONIC CO.,LTD

Packing	TOLERANCE:	PROJECTION	TITLE:
1.General	ANGLE ±2°	DATE	Pitch:2.54 *H=7.1 Female Header Double Row Straight Type,Dip=3.1mm
2.Tape&Reel	X.XXX ±0.05	DRAWN	CUSTOMER: N/A
3.Tube	X.XX ±0.15	CHECKED	PART NO.: N/A
4.Tray	X.X ±0.25	APPROVED	DRAWING NO.: FHA2710/A01
5.Other	X. ±0.50		REV: N/A
			REV: A

A

B

C

D

6

5

4

3

2

1

A

B

C

D

6

5

4

3

2

1