


CUSTOMER COPY





REVISION DATA

SYM	ECN	DESCRIPTION	DATE	APPROVED

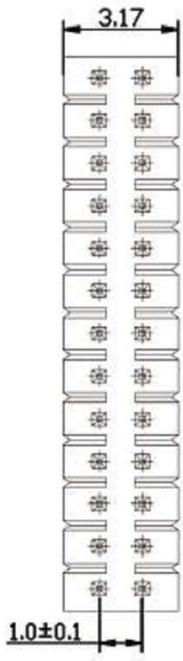

Specifications:  
 Current Rating: 1.0A AC/DC  
 Voltage Rating: 50V AC/DC  
 Contact Resistance: 20m ohm, max.  
 Insulation Resistance: 1,000M ohm, min.  
 Withstanding Voltage: 500V For One Minute  
 Operating Temperature Range: -25°C ~ +105°C  
 Material and Finish  
 Insulator: High Temp. Plastic (Nylon 6T UL94V-0)  
 Insulator Color: Black  
 Contact: Copper Alloy  
 Plating: Gold Plated

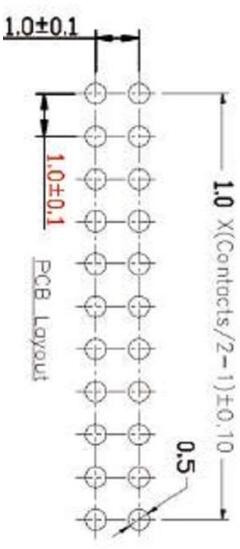

Ordering information

QCA2 15 1 - P XX X X A 09

High Option 15: H=1.5mm	No. of Positions 02~100	Plating Option A: G/F B: AuSp. C: AuSp. D: Au10u H: Gr/Sn120u S: Sn120u Z: Special (Underline option is standard)	Insulator Material Option A: BK-PBT C: BK-LCP F: BK-P&T G: BK-PA6T S: Special (Underline option is standard)	Type Option A: Normal	Serial No. 01~99
----------------------------	----------------------------	-------------------------------------------------------------------------------------------------------------------------------------------	-----------------------------------------------------------------------------------------------------------------------------------	--------------------------	---------------------

**natconn** 广东纳特康电子股份有限公司  
 GUANGDONG NATCONN ELECTRONIC CO.,LTD

Packing		TOLERANCE:		PROJECTION		TITLE:	
1. General	√	ANGLE	±2°	DATE	2020/12/07	Pitch: 1.0*H1.50mm Pin Header Dual Row	
2. Tape&Reel		X.XXX	±0.05	DRAWN	莫健勇	CUSTOMER:	N/A
3. Tube		X.XX	±0.20	CHECKED		PART NO.:	QCA2151PA09
4. Tray		X.X	±0.30	APPROVED		SIZE:	A4
5. Other		X.	±0.50			UNIT:	mm
						SCALE:	1:1
						SHEET:	1/1