



CUSTOMER COPY



REVISION DATA				
SYM	ECN	DESCRIPTION	DATE	APPROVED
		塑胶反向	2020.02.15	冯显东



Recommended P.C.B
Layout(±0.05)

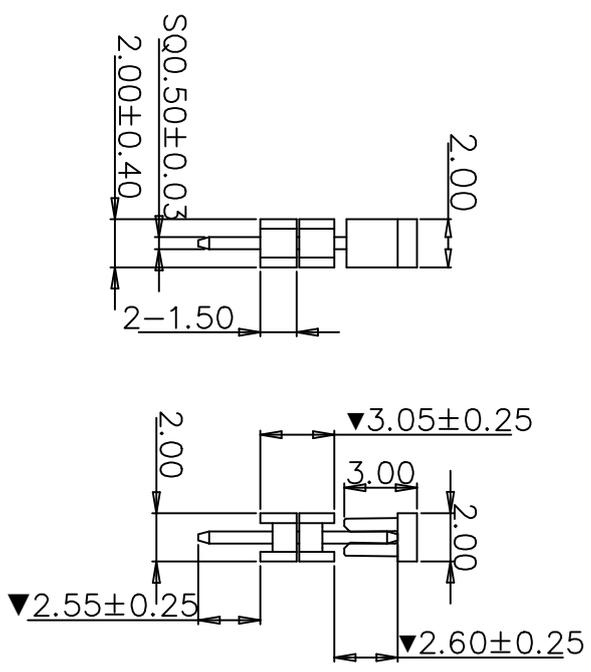

Technical Data
 Contact: brass JIS C2700(Cuzn35)
 Contact plating: see ordering information
 Insulator: black glass filled polyester
 UL94V-0
 plated: 1u" Au all over 50~80u" Ni
 Current rating: 3Amps
 Contact resistance: 20mΩ max.
 Insulation resistance: 1000MΩ min. at 100V
 Withstanding Voltage: 450V AC/minute
 Retention force: 0.6Kgf/contact per layer min.
 Operating temperature: -55°C to +105°C
 Soldering temperature: 260°C±5° 5S
 Critical Dimensions: ▼

Ordering information

QFA1 15 2 - P 01 X X C 28

High Option 15: H=1.50mm	No. of Positions 01-40	Plating Option A Au1u" B Au3u" C Au10u" D GF/Sn120u" S Sn120u" Z Special	Insulator Material Option F BK-LCP G BK-PAQT S Special
-----------------------------	---------------------------	--	---

natconn 广东纳特康电子股份有限公司
 GUANGDONG NATCONN ELECTRONIC CO.,LTD

Packing		TOLERANCE: ANGLE ±2°		PROJECTION		TITLE: Pitch2.00*H1.50mm Pin Header Single Row Straight Type	
1.General		X.XXX	±0.05	DATE	2016/02/18	CUSTOMER: N/A	CUSTOMER P/N: N/A
2.Tape&Reel	√	X.XX	±0.20	DRAWN	唐建平	PART NO.: N/A	DRAWING NO.: QFA1152P01C28
3.Tube		X.X	±0.30	CHECKED	雷邦军	SIZE: A4	SCALE: 1:1
4.Tray		X.	±0.50	APPROVED	冯显东	UNIT: mm	SHEET: 1/1
5.Other							

6 5 4 3 2 1