


CUSTOMER COPY




REVISION DATA				
SYM	ECN	DESCRIPTION	DATE	APPROVED

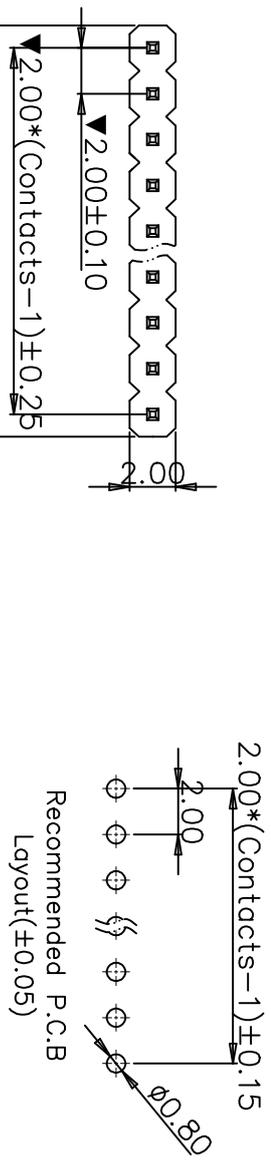

Recommended P.C.B Layout(±0.05)

**Technical Data**  
 Contact: brass JIS C2800(Cuzn40) see ordering information black glass filled polyester UL94V-0  
 Insulator: 1.5Amps  
 Current rating: 20mΩ max.  
 Contact resistance: 1000MΩ min. at 100V  
 Withstanding Voltage: 550V AC/minute  
 Retention force: 0.6Kgf/contact per layer min.  
 Operating temperature: -55°C to+105°C  
 Soldering temperature: 245°C±5° 5S  
 Critical Dimensions:▼

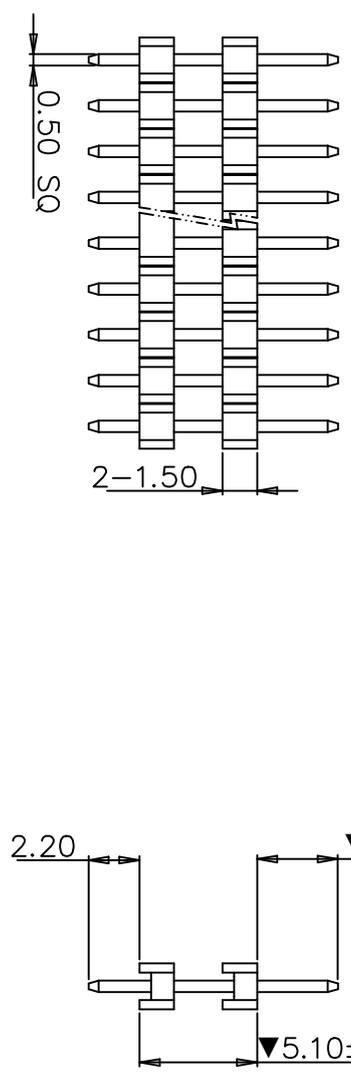

Ordering information

QFA1 15 2 -P XX X X A

High Option  
15: H=1.50mm

No. of Positions  
01-40

Plating Option  
A: G/E  
B: Au3μ"  
C: Au5μ"  
D: Au10μ"  
H: GF/Sn120μ"  
S: Sn120μ"  
Z: Special (Underline option is standard)

Insulator Material Option  
A: BK-PBT  
F: BK-LCP  
G: BK-PA6T  
S: Special (Underline option is standard)

Serial No.  
01-99

19

Packing	TOLERANCE:
1. General	ANGLE ±2°
2. Tape&Reel	X.XXX ±0.05
3. Tube	X.XX ±0.20
4. Tray	X.X ±0.30
5. Other	X. ±0.50

**natconn** 广东纳特康电子股份有限公司  
 GUANGDONG NATCONN ELECTRONIC CO.,LTD

PROJECTION	TITLE:
DATE: 2014/03/26	Pitch2.00*H1.50mm Pin Header Single Row Straight Type
DRAWN: 于松	CUSTOMER: N/A
CHECKED: 唐建平	PART NO.: N/A
APPROVED: 冯显东	DRAWING NO.: QFA1152PA19
SIZE: A4	UNIT: mm
SCALE: 1:1	SHEET: 1/1

6 5 4 3 2 1