



CUSTOMER COPY

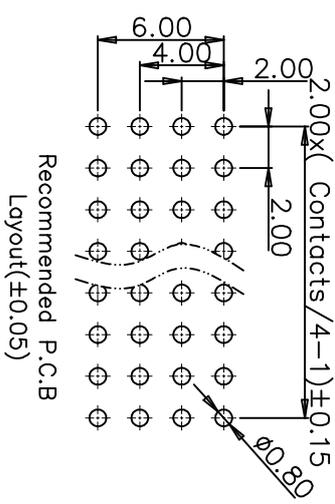



REVISION DATA				
SYM	ECN	DESCRIPTION	DATE	APPROVED

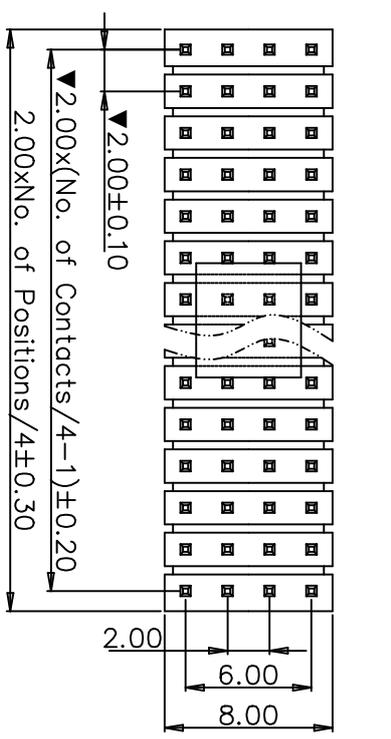

Recommended P.C.B
Layout(±0.05)

Technical Data
 Contact: brass JIS C2700(Cuzn35)
 Contact plating: see ordering information
 Insulator: black PA9T UL94V-0

Current rating: 1.5Amps
Contact resistance: 20mΩ max.
Insulation resistance: 1000MΩ min. at 100V
Withstanding Voltage: 450V AC/minute
Retention force: 0.6Kgf/contact min.
Operating temperature: -40°C to +105°C
Soldering temperature: 260°C±5° SS
Critical Dimensions: ▼

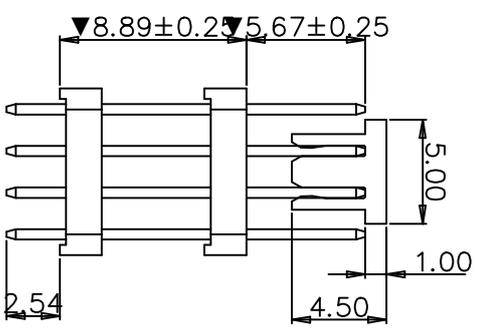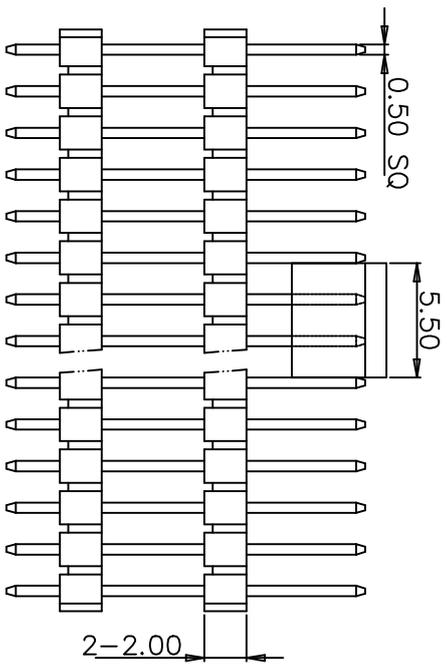

Ordering information

QFA4 20 2 - P XXX X X C 02

High Option
20: H=2.00mm

No. of Positions
04-160

Plating Option
A G/F
B Au3u"
C Au5u"
D Au10u"
H Au/Sn20u"
S Sn120u"
Z Special (Underline option is standard)

Insulator Material Option
A BK-PBT
F BK-LCP
G BK-PA9T
S Special (Underline option is standard)

Serial No.
01-99

Packing	TOLERANCE:
1. General	ANGLE ±2°
2. Tape&Reel	X.XXX ±0.05
3. Tube	X.XX ±0.20
4. Tray	X.X ±0.30
5. Other	X. ±0.50

natconn 广东纳特康电子股份有限公司
 GUANGDONG NATCONN ELECTRONIC CO.,LTD

PROJECTION	TITLE:
DATE: 2016/09/01	Pitch2.0*H2.0 Pin Header Tetrad Row _s
DRAWN: 唐建平	Straight Type, Dual Layer, A=2.54, B=5.67, C=8.89
CHECKED: 雷邦军	CUSTOMER: N/A
APPROVED: 冯显东	PART NO.: N/A
	DRAWING NO.: QFA4202PC02
	SCALE: 1:1
	SHEET: 1/1

6 5 4 3 2 1