

CUSTOMER COPY


6 5 4 3 2 1



REVISION DATA				
SYM	ECN	DESCRIPTION	DATE	APPROVED



Recommended P.C.B
Layout(± 0.05)

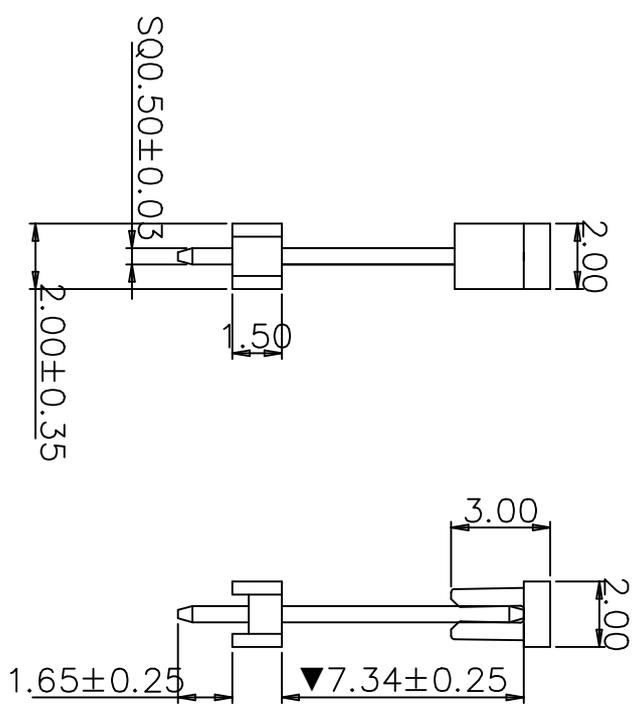

Technical Data
 Contact: brass JIS C2700(Cuzn35)
 Contact plating: see ordering information
 Insulator: black glass filled polyester
 UL94V-0
 1u" Au all over 50~80u" Ni
 3Amps
 plated:
 Current rating: 20m Ω max.
 Contact resistance: 1000M Ω min. at 100V
 Insulation resistance: 450V AC/minute
 Withstanding Voltage: 0.6kgf/contact per layer min.
 Retention force:
 Operating temperature: -55°C to +105°C
 Soldering temperature: 260°C±5° 5S
 Critical Dimensions: ▼

Ordering information

QFA1 15 1 - P 01 X X C

High Option 15: H=1.50mm	Insulator Quantity 1 IPC 2 JPCS ...	No. of Positions 01-40	Plating Option A Au1u" B Au3u" C Au5u" D Au10u" S Sn120u" Z Special (Underline option is standard)	Insulator Material Option F BK-LCP G BK-PBT S Special (Underline option is standard)
-----------------------------	--	---------------------------	---	--

Serial No. 33

Packing	
1. General	✓
2. Tape&Reel	✓
3. Tube	X.XX ± 0.20
4. Tray	X.X ± 0.30
5. Other	X. ± 0.50

natconn 广东纳特康电子股份有限公司
 GUANGDONG NATCONN ELECTRONIC CO.,LTD

TOLERANCE: ANGLE $\pm 2^\circ$
 PROJECTION: DATE 2017/02/15
 TITLE: Pitch2.00*H1.50mm Pin Header
 Single Row Straight Type

DRAWN	唐建平	CUSTOMER:	N/A	REV:	N/A
CHECKED	雷邦军	PART NO.:	QFA1151P01C33	REV:	A
APPROVED	冯显东	SIZE:	A4	SCALE:	1:1
		UNIT:	mm	SHEET:	1/1

6 5 4 3 2 1