

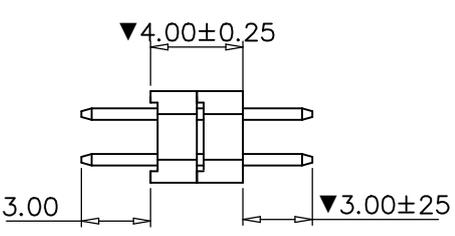


CUSTOMER COPY

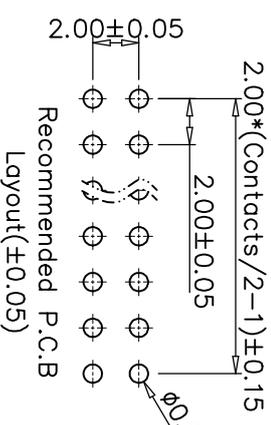


REVISION DATA				
SYM	ECN	DESCRIPTION	DATE	APPROVED

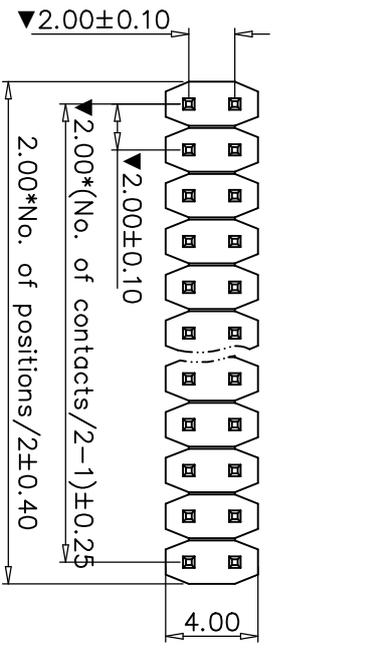

Technical Data
 Contact: brass JIS C2700(Cuzn35)
 Contact plating: see ordering information
 Insulator: black glass filled polyester
 UL94V-0

Current rating: 1.5Amps
 Contact resistance: 20mΩ max.
 Insulation resistance: 1000MΩ min. at 100V
 Withstanding Voltage: 450V AC/minute
 Retention force: 0.6Kgf/contact per layer min.
 Operating temperature: -55°C to +105°C
 Soldering temperature: 245°C±5° 5S
 Critical Dimensions: ▼

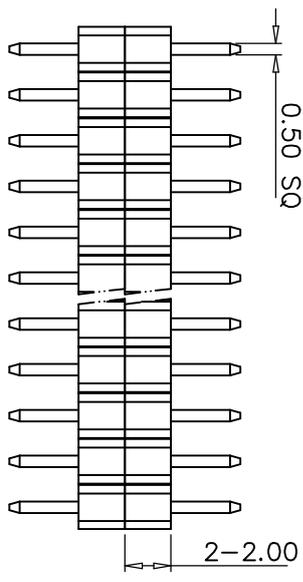

Ordering information

QFA2 20 2-P XX X X A 147

High Option 20: H=2.00mm

Insulator Quantity: 1 1PC, 2 2PCS, 3 3PCS, ...

No. of Positions: 02-80

Plating Option: A: GE, B: AuSn, C: Sn/Pb, S: Special (Underline option is standard)

Insulator Material Option: A: BK-BET, F: BK-LCP, G: BK-PAET, S: Special (Underline option is standard)

Serial No. 001-999

Packing	
1. General	√
2. Tape & Reel	
3. Tube	
4. Tray	
5. Other	

natconn 广东纳特康电子股份有限公司
 GUANGDONG NATCONN ELECTRONIC CO.,LTD

TOLERANCE: ANGLE ±2°

PROJECTION	DATE	TITLE
DRAWN	2017/03/27	2.00*H2.0mm Pin Header Dual Row
CHECKED	王伟超	Straight Type: B=3.0, C=4.0, L=10.0mm
APPROVED		

CUSTOMER: NA PART NO.: NA DRAWING NO.: QFA2202PA147

SIZE: A4 UNIT: mm SCALE: 1:1 SHEET: 1/1