

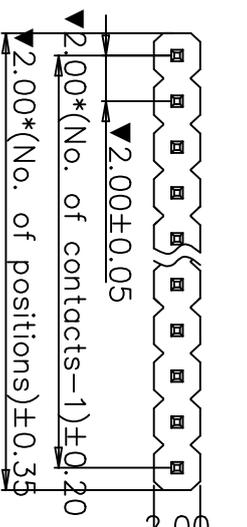
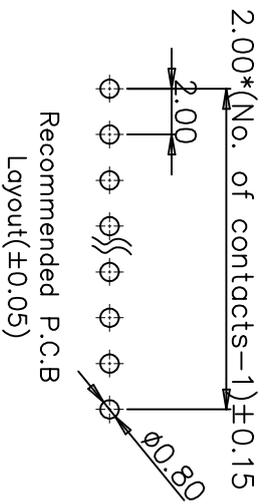


REVISION DATA				
SYM	ECN	DESCRIPTION	DATE	APPROVED

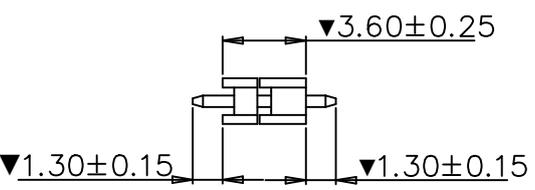

500.50 ± 0.03

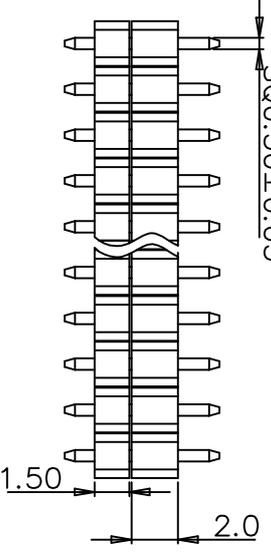

Technical Data
 Contact: brass JIS C2700(Cuzn35)
 Contact plating: see ordering information
 Insulator: black glass filled polyester
 UL94V-0
 1.5Amps
 Current rating: 20m Ω max.
 Contact resistance: 1000M Ω min. at 100V
 Insulation resistance: 450V AC/minute
 Withstanding Voltage: 0.6Kgf/contact per layer min.
 Retention force: Operating temperature: -55°C to +105°C
 Soldering temperature: 245°C±5 5S
 Critical Dimensions: ▼

Ordering information

QFA1	15	2 - P	XX	X	X	A	24		
High Option	15: H=1.50mm	No. of Positions	01-40	Plating Option	A: Gf B: Au3 μ C: Au5 μ D: Au10 μ H: Gf/Sn120 μ S: Sn120 μ Z: Special	Insulator Material Option	A: BK-PBT F: BK-LCP G: BK-PA6T S: Special	Serial No.	01-99

Packing	TOLERANCE:
1. General	ANGLE $\pm 2^\circ$
2. Tape&Reel	X.XXX ± 0.05
3. Tube	X.XX ± 0.15
4. Tray	X.X ± 0.25
5. Other	X. ± 0.50

natconn ® 广东纳特康电子股份有限公司
 GUANGDONG NATCONN ELECTRONIC CO.,LTD

PROJECTION	TITLE:
DATE: 2016/01/04	Pitch: 2.00*H1.50mm Pin Header Single Row Straight Type
DRAWN: 雷邦军	CUSTOMER: N/A
CHECKED	PART NO.: N/A
APPROVED	DRAWING NO.: QFA1152PA24
SIZE: A4	UNIT: mm
SCALE: 1:1	SHEET: 1/1