

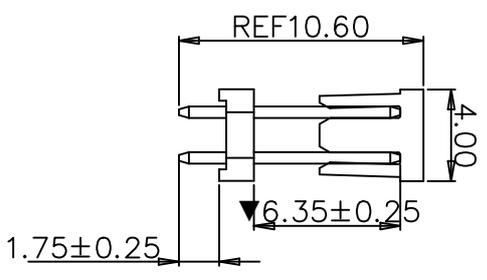
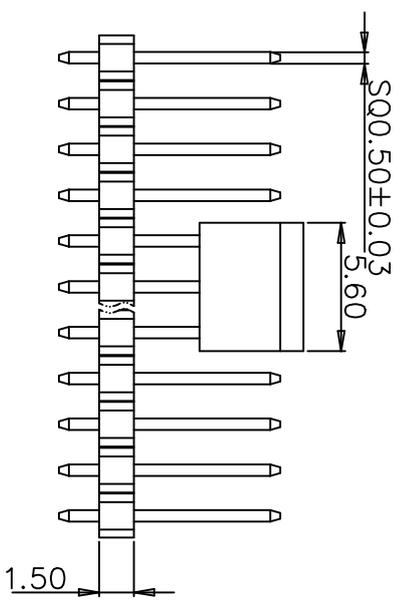


CUSTOMER COPY

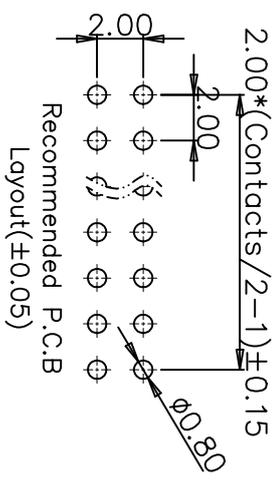

REVISION DATA				
SYM	ECN	DESCRIPTION	DATE	APPROVED

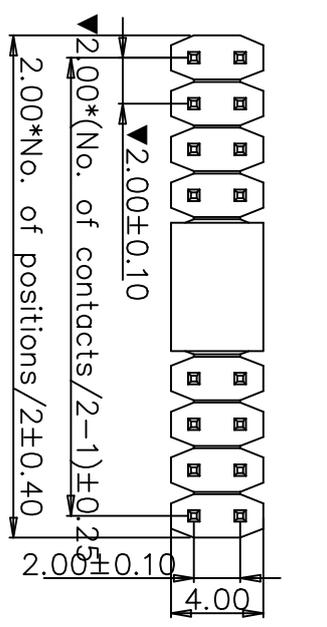

Technical Data
 Contact: brass JIS C2700(Cuzn35)
 Contact plating: see ordering information
 Insulator: LCP black glass filled polyester UL94V-0
 Plating: Tin 120u" over Ni 30~50u"
 Current rating: 3.0Amps
 Contact resistance: 20mΩ max.
 Insulation resistance: 1000MΩ min. at 100V
 Withstanding Voltage: 450V AC/minute
 Retention force: 0.6Kgf/contact per layer min.
 Operating temperature: -55°C to +105°C
 Soldering temperature: 260°C±5° 5S
 Critical Dimensions: ▼

Ordering information

QFA2 15 1 - P XX S F C 79

High Option 15: H=1.50mm	Insulator Quantity 1 1PC 2 2PCS 3 3PCS ...	No. of Positions 02-80	Plating Option A GFE B Au3u" C Au5u" D Au10u" H GFSnt120u" S Snt120u" Z Mate T1n120u" (Underline option is standard)	Insulator Material Option A BK-EPBT F BK-LCP G BK-PA9T S Special (Underline option is standard)	Serial No. 01-99
-----------------------------	--	---------------------------	--	--	---------------------

Packing	
1. General	
2. Tape&Reel	√
3. Tube	
4. Tray	
5. Other	

TOLERANCE:	ANGLE ±2°
1. General	X.XXX ±0.05
2. Tape&Reel	X.XX ±0.25
3. Tube	X.X ±0.35
4. Tray	X.X ±0.50
5. Other	

natconn 广东纳特康电子股份有限公司
 GUANGDONG NATCONN ELECTRONIC CO.,LTD

PROJECTION	DATE	DRAWN	CHECKED	APPROVED	TITLE:	CUSTOMER:	PART NO.:	DRAWING NO.:	REV.:
	2019/12/02	莫健勇			Pitch2.00*H1.50mm Pin Header Dual Row Straight Type	N/A		QFA2151P5FC79	N/A
									A

6 5 4 3 2 1