


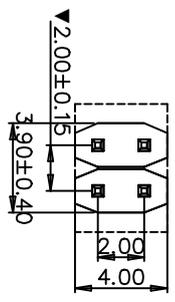


REVISION DATA				
SYM	ECN	DESCRIPTION	DATE	APPROVED
B		5.00=>4.00	2021/04/28	

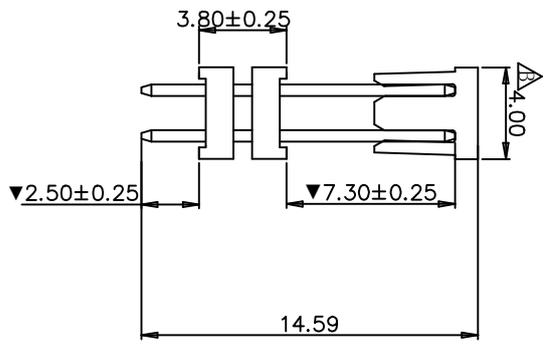

Recommended P.C.B Layout(±0.05)

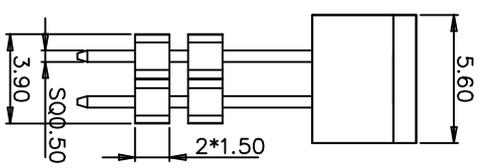

Technical Data  
 Contact: brass JIS G2700(Cuzn35)  
 Contact plating: see ordering information  
 Insulator: black glass filled polyester  
 UL94V-0  
 Current rating: 3Amps  
 Contact resistance: 20mΩ max.  
 Insulation resistance: 1000MΩ min. at 100V  
 Withstanding Voltage: 450V AC/minute  
 Retention force: 0.6Kgf/contact min.  
 Operating temperature: -55°C to+105°C  
 Soldering temperature: 245°C±5° 5S  
 Critical Dimensions: ▼

**natconn** 广东纳特康电子股份有限公司  
 GUANGDONG NATCONN ELECTRONIC CO.,LTD

Ordering information  
 QFA2 15 2 - P 04 X X C 28

High Option 15: H=1.50mm	Insulator Quantity 1 1PC 2 2PCS 3 3PCS ...	No. of Positions 02-90	Plating Option A. G/E B. Au3u" C. Au5u" D. Au10u" H. GF/Sr120u" I. Au20u" S. Sn120u" Z. Matte Tin120u"	Insulator Material Option A. BK-FBT F. BK-LCP G. BK-PA9T S. Special (Underline option is standard)
-----------------------------	--	---------------------------	--	--

Serial No. 01-99	28
---------------------	----

Packing	
1. General	
2. Tape&Reel	√
3. Tube	
4. Tray	
5. Other	

TOLERANCE: ANGLE ±2°	X.XXX ±0.05
	X.XX ±0.25
	X.X ±0.35
	X. ±0.50

PROJECTION	DATE	DRAWN	CHECKED	APPROVED
	2020/01/07	莫雄勇		

TITLE: Pitch2.00*H1.50mm Pin Header Dual Row Straight Type	CUSTOMER: N/A	CUSTOMER P/N: N/A	REV: N/A
PART NO.: QFA2152P04C28	DRAWING NO.: QFA2152P04C28	REV: B	
SIZE: A4	UNIT: mm	SCALE: 1:1	SHEET: 1/1