



CUSTOMER COPY

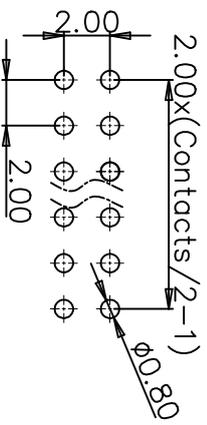


REVISION DATA				
SYM	ECN	DESCRIPTION	DATE	APPROVED

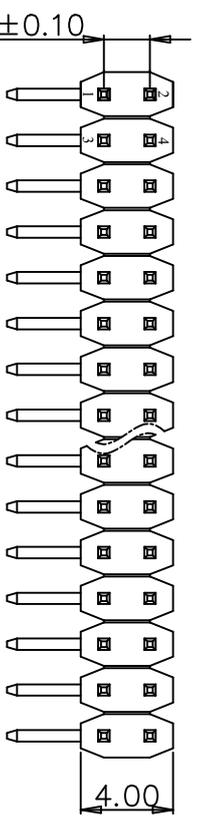

Recommended P.C.B
Layout(±0.05)

Technical Data
 Contact: brass JIS C2700(Cuzn35)
 Contact plating: see ordering information
 Insulator: black glass filled polyester
 UL94V-0
 Current rating: 3Amps
 Contact resistance: 20mΩ max.
 Insulation resistance: 1000MΩ min. at 100V
 Withstanding Voltage: 550V AC/minute
 Retention force: 1Kgf/contact min.
 Operating temperature: -55°C to+105°C
 Soldering temperature: 245°C±5° 5S
 Critical Dimensions: ▼

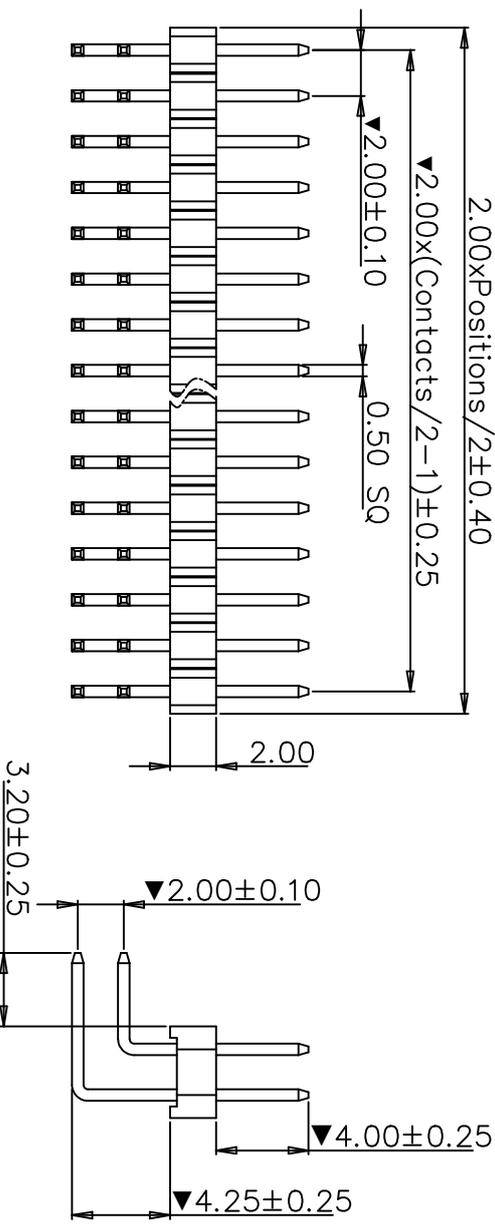

Ordering information

QFB2 20 1 - P XX X X A 58

High Option
20: H=200mm

No. of Positions
01-40

Plating Option
A: GFE
B: Au30"
C: Au50"
D: Au100"
H: Au/Sn/20u"
S: Sn120u"
Z: Special (Underline option is standard)

Insulator Material Option
A: BK-PBT
F: BK-LCP
G: BK-PA9T
S: Special (Underline option is standard)

Type Option
A: Normal
C: With cap

Serial No.
01-999

Packing	TOLERANCE:
1. General	ANGLE ±2°
2. Tape&Reel	X.XXX ±0.05
3. Tube	X.XX ±0.25
4. Tray	X.X ±0.35
5. Other	X. ±0.50

natconn 广东纳特康电子股份有限公司
 GUANGDONG NATCONN ELECTRONIC CO.,LTD

PROJECTION	TITLE:
DATE: 2018/11/22	2.00*2.00mm Pin Header Dual Row
DRAWN: 王伟超	Right Angle A=3.2,B=4.0mm
CHECKED: 唐建平	CUSTOMER: N/A
APPROVED: 冯显东	PART NO.: QFB201PA58
	CUSTOMER P/N: N/A
	DRAWING NO.: QFB201PA58
	SCALE: 1:1
	SHEET: 1/1