




CUSTOMER COPY

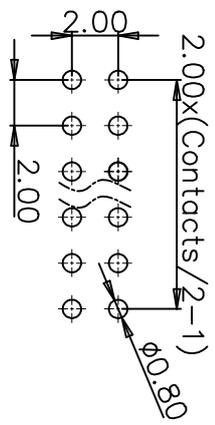


REVISION DATA				
SYM	ECN	DESCRIPTION	DATE	APPROVED

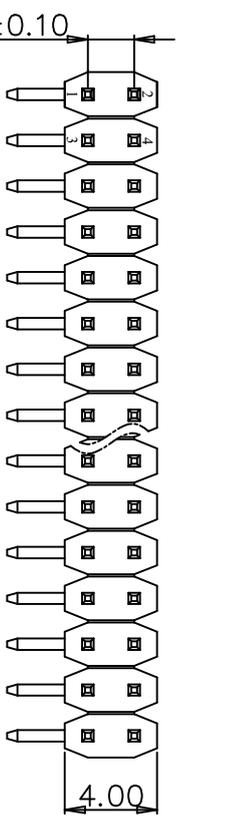

Recommended P.C.B  
Layout(±0.05)

Technical Data  
 Contact: brass JIS C2700(Cuzn35)  
 Contact plating: see ordering information  
 Insulator: black glass filled polyester  
 UL94V-0  
 Current rating: 2Amps  
 Contact resistance: 20mΩ max.  
 Insulation resistance: 1000MΩ min. at 100V  
 Withstanding Voltage: 550V AC/minute  
 Retention force: 0.5Kgf/contact min.  
 Operating temperature: -40°C to+105°C  
 Soldering temperature: 245°C±5° 5S  
 Critical Dimensions: ▼

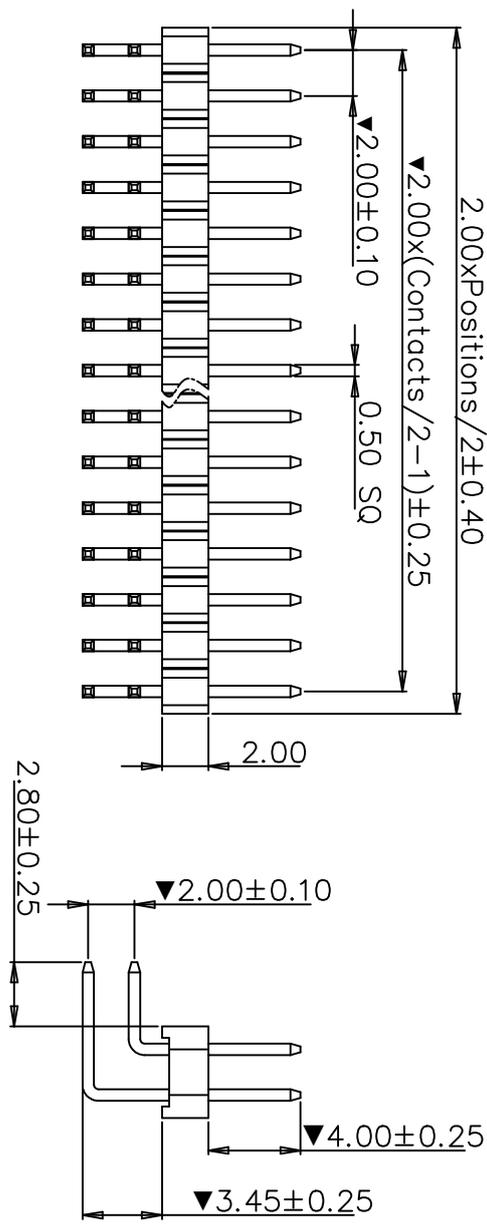

Ordering information

QFB2 20 1 - P XX X X A 79

High Option  
20: H=200mm

No. of Positions  
01-40

Plating Option  
A Au30"  
B Au30"  
C Au50"  
D Au100"  
H Au/Sn 20μ"  
S Sn 20μ"  
Z Special (Underline option is standard)

Insulator Material Option  
A BK-PBT  
G BK-LCP  
S Special (Underline option is standard)

Type Option  
A Normal  
C With cap

Serial No.  
01-999

Packing	TOLERANCE:
1. General	ANGLE ±2°
2. Tape&Reel	X.XXX ±0.05
3. Tube	X.XX ±0.25
4. Tray	X.X ±0.35
5. Other	X. ±0.50

**natconn** 广东纳特康电子股份有限公司  
 GUANGDONG NATCONN ELECTRONIC CO.,LTD

PROJECTION	TITLE:	CUSTOMER:	CUSTOMER P/N:	REV:
DATE	2.00*2.00mm Pin Header Dual Row Right Angle	N/A	N/A	N/A
DRAWN		PART NO.:	DRAWING NO.:	REV:
CHECKED		SIZE: A4	QFB201PA79	A
APPROVED		UNITE: mm	SCALE: 1:1	SHEET: 1/1

6 5 4 3 2 1