



CUSTOMER COPY



REVISION DATA				
SYM	ECN	DESCRIPTION	DATE	APPROVED

Technical Data
 Contact: brass C2700(Cuzn35)
 Contact plating: see ordering information
 Insulator: black glass filled polyester UL94V-0

Current rating: 1.5Amps
 Contact resistance: 20mΩ max.
 Insulation resistance: 1000MΩ min. at 100V
 Withstanding Voltage: 450V AC/minute
 Retention force: 0.6kgf/contact per layer min.
 Operating temperature: -55°C to +105°C
 Soldering temperature: 260°C±5° 5S
 Critical Dimensions: ▼

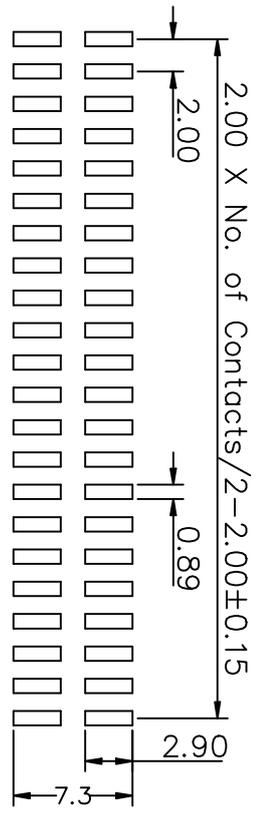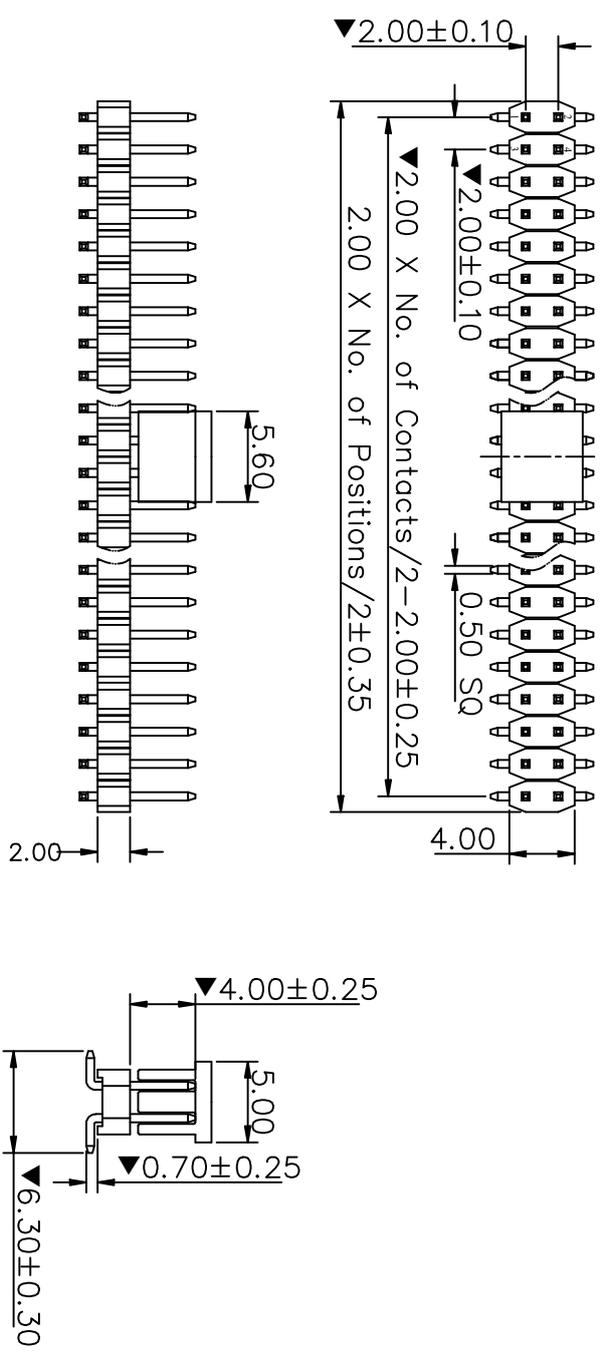

Ordering Information

QFD2 20 1 - P XX X X C 22

High Option
 20: H=2.00mm

No. of Positions
 02-90

Plating Option
 A: Cu
 B: Au3+
 C: Au5+
 D: Au70+
 H: GFSN120uF
 S: Sn120u
 Z: Special (Underline option is standard)

Insulator Material Option
 F: BK-LCP
 G: BK-PA9T
 S: Special

Serial No.
 01-99

Packing	TOLERANCE:
1. General	ANGLE ±2°
2. Tape&Reel	X.XXX ±0.01
3. Tube	X.XX ±0.25
4. Tray	X.X ±0.35
5. Other	X. ±0.50

natconn 广东纳特康电子股份有限公司
 GUANGDONG NATCONN ELECTRONIC CO.,LTD

TITLE: 2.00*2.00mm Pin Header
 Ducl RowSMT W=4.0mm

PROJECTION	DATE	DRAWN	CHECKED	APPROVED	CUSTOMER P/N	PART NO.	DRAWING NO.	SCALE	SHEET
	2015/10/08	唐建平	雷邦军	冯显东	N/A	QFD2201PC22	1:1	1/1	

6 5 4 3 2 1