



CUSTOMER COPY

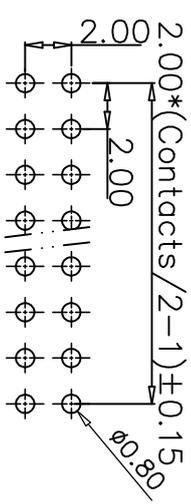


REVISION DATA				
SYM	ECN	DESCRIPTION	DATE	APPROVED

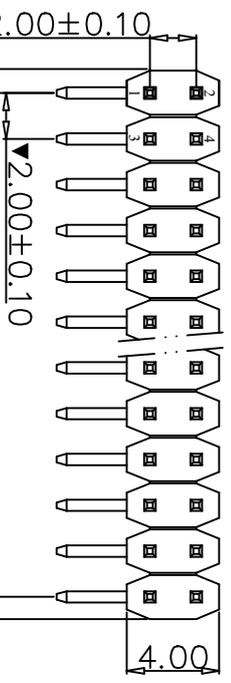

Recommended PCB Board Layout(±0.05)

Technical Data
 Contact: brass JIS C2700(Cuzn35)
 Contact plating: see ordering information
 Insulator: black glass filled polyester UL94V-0
 Current rating: 1.5Amps
 Contact resistance: 20mΩ max.
 Insulation resistance: 1000MΩ min. at 100V
 Withstanding Voltage: 450V AC/minute
 Retention force: 0.5Kgf/contact per layer min.
 Operating temperature: -40°C to+105°C
 Soldering temperature: 245°C±5° 5S
 Critical Dimensions: ▼

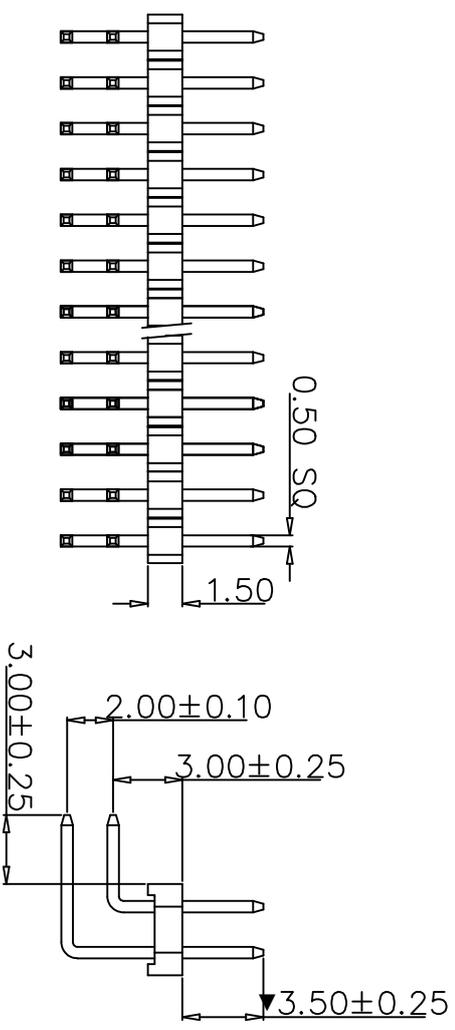

Ordering information(Part No.)

QFB2 15 1 - P XX X X A 20

High Option 15: H=1.5mm	No. of Positions 02-80	Plating Option A GF B Au3μ" C Au5μ" D Au10μ" H GF/5μ120μ" S Sn120μ" Special	Insulator Material Option A BK-FBT F BK-LCP G BK-PA6T S Special	Serial No. 01-999
----------------------------	---------------------------	--	--	----------------------

Packing

1. General	√
2. Tape&Reel	
3. Tube	
4. Tray	
5. Other	

natconn

广东纳特康电子股份有限公司
 GUANGDONG NATCONN ELECTRONIC CO.,LTD

TOLERANCE: ANGLE ±2°
 PROJECTION: DATE 2025/3/20
 DRAWN: 郑双平
 CHECKED: 莫健勇
 APPROVED: 冯显东

TITLE: Pitch 2.00*H1.5 Pin Header Dual Row
 Straight Type

CUSTOMER: N/A
 PART NO.: QFB2151PA20
 DRAWING NO.: QFB2151PA20

SIZE: A4 UNIT: mm SCALE: 1:1 SHEET: 1/1

6 5 4 3 2 1