





CUSTOMER COPY

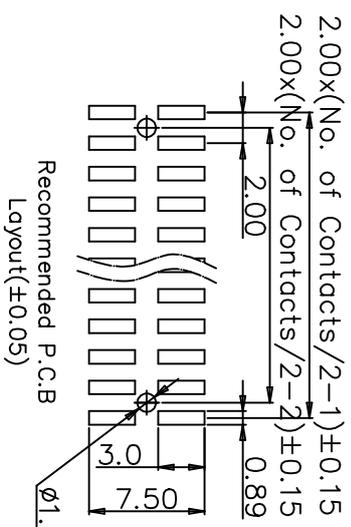

REVISION DATA				
SYM	ECN	DESCRIPTION	DATE	APPROVED

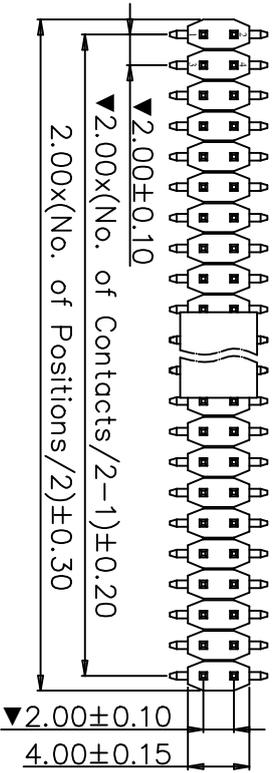

Technical Data
 Contact: brass C2700(Cuzn35)
 Contact plating: see ordering information
 Insulator: black glass filled polyester
 UL94V-0
 Current rating: 1.5Amps
 Contact resistance: 20mΩ max.
 Insulation resistance: 1000MΩ min. at 100V
 Withstanding Voltage: 450V AC/minute
 Retention force: 0.6Kgf/contact per layer min.
 Operating temperature: -55°C to +105°C
 Soldering temperature: 260°C±5° 5S
Critical Dimensions: ▼

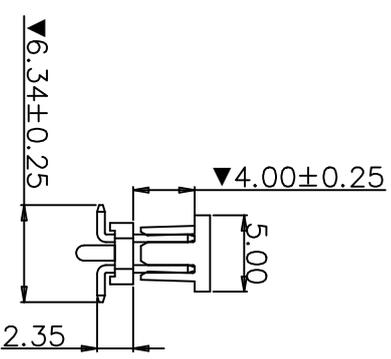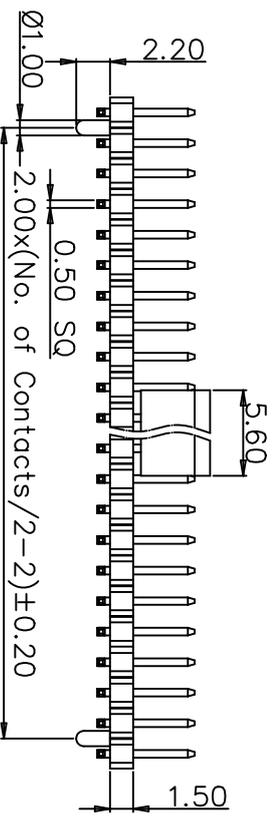

Ordering information

QFD2 15 1-P XX X X C 05

High Option
15: H=1.5mm

No. of Positions
04 to 80

Plating Option
A Au30"
B Au30"
C Au30"
D Au10u"
E Au15u"
S Special

Insulator Material Option
F BK-LCP
G BK-PA9T
S Special

Lead Style
01-99

Packing	TOLERANCE:	PROJECTION	TITLE:
1. General	ANGLE ±2°	DATE	Pitch: 2.00*H=1.50mm Pin Header Dual Row SMT Type
2. Tape&Reel	X.XXX ±0.01	DRAWN	CUSTOMER: N/A
3. Tube	X.XX ±0.25	CHECKED	PART NO.: QFD2151PC05
4. Tray	X.X ±0.35	APPROVED	SIZE: A4
5. Other	X. ±0.50		UNIT: mm

natconn ® 广东纳特康电子股份有限公司
 GUANGDONG NATCONN ELECTRONIC CO.,LTD.

6 5 4 3 2 1