

CUSTOMER COPY

6

5

4


3

2

1



REVISION DATA				
SYM	ECN	DESCRIPTION	DATE	APPROVED



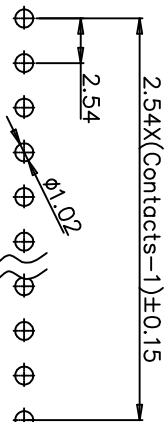


Technical Data

Contact: brass JIS C2700(Cuzn35)
Contact plating: see ordering information
Insulator: black glass filled polyester
UL94V-0

Recommended P.C.B
Layout(±0.05)

Current rating: 3Amps
Contact resistance: 20mΩ max.
Insulation resistance: 1000MΩ min. at 100V
Withstanding Voltage: 550V AC/minute
Retention force: 1Kgf/contact min.
Operating temperature: -55°C to +105°C
Soldering temperature: 245°C±5 5S
Critical Dimensions:▼

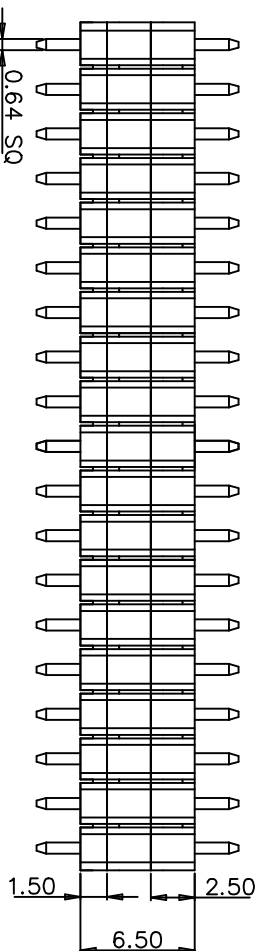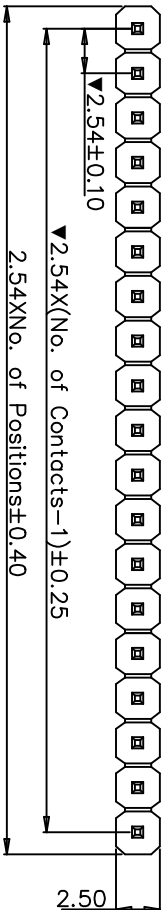

Ordering information

QHA1 25 3 - P XX X X A 15

High Option
25: H=2.54mm

No. of Positions
01~40

Plating Option
A: GFE
B: Au3u"
C: Au5u"
D: Au10u"
H: Gf/Sn 20u"
S: Sn 20u"
Z: Special
(Underline option is standard)

Insulator Material Option
A: BK-PBT
F: BK-LCP
G: BK-PA9T
S: Special
(Underline option is standard)

Type Option
A: Normal
C: With CAP

Serial No
01~99

Packing
1. General
2. Tape&Reel
3. Tube
4. Tray
5. Other

natconn ® 广东纳特康电子股份有限公司
GUANGDONG NATCONN ELECTRONIC CO.,LTD

TOLERANCE: ANGLE ±2°

PROJECTION: DATE: 2013/05/27

TITLE: 2.54mm Pin Header Single Row
Straight W=2.5mm

CUSTOMER: N/A
PART NO.:
DRAWING NO.: QHA1253PA15

CUSTOMER P/N: N/A

SIZE: A4
UNIT: mm
SCALE: 1:1
SHEET: 1/1

REVISION: N/A
REV: A