



CUSTOMER COPY


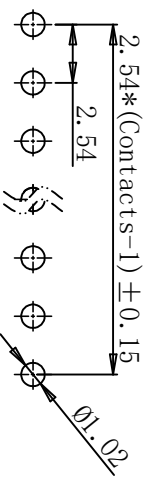


REVISION DATA				
SYM	ECN	DESCRIPTION	DATE	APPROVED

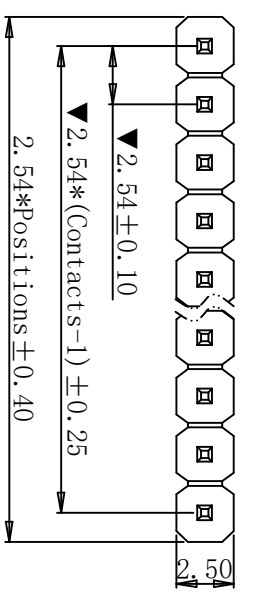

Recommended P.C.B
Layout(±0.05)

Technical Data
 Contact: brass JIS C2700(Cuzn35)
 Contact plating: see ordering information
 Insulator: black glass filled polyester UL94V-0
 Current rating: 3Amps
 Contact resistance: 20mΩ max.
 Insulation resistance: 1000MΩ min. at 100V
 Withstanding Voltage: 550V AC/minute
 Retention force: 0.5Kgf/contact per layer min.
 Operating temperature: -55°C to +105°C
 Soldering temperature: 245°C±5° 5S
 Critical Dimensions: ▼

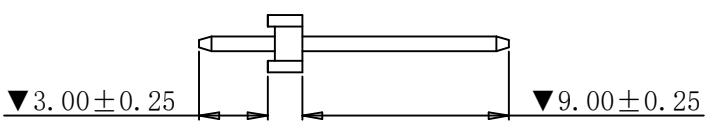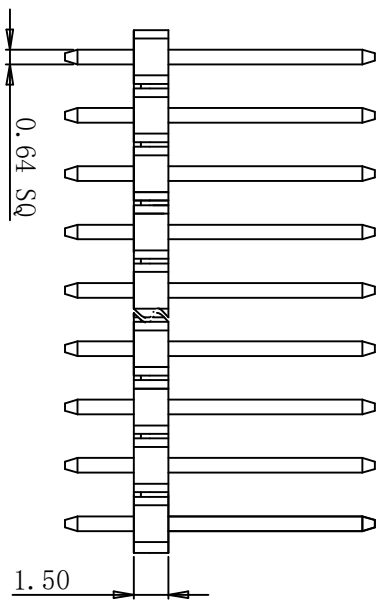

Ordering information

QHA1 15 1 - P XX X X A 54

High Option 15: H=1.50mm	Insulator Quantity 1 IPC 2 PFCs 3 SPCS ...	No. of Positions 01-40	Plating Option A: G/E B: Au3μ" C: Au5μ" D: Au10μ" H: GF/Sn120μ" S: Sn120μ" Z: Special (Underline option is standard)	Insulator Material Option A: BK-PBT B: BK-LCP G: BK-PA6T S: Special (Underline option is standard)
-----------------------------	--	---------------------------	--	---

Serial No. 01-999

Packing	TOLERANCE:
1. General	ANGLE ±2°
2. Tape&Reel	X.XXX ±0.05
3. Tube	X.XX ±0.20
4. Tray	X.X ±0.30
5. Other	X. ±0.50

natconn 广东纳特康电子股份有限公司
 GUANGDONG NATCONN ELECTRONIC CO.,LTD

PROJECTION	DATE	DRAWN	CHECKED	APPROVED	TITLE:	CUSTOMER:	PART NO.:	DRAWING NO.:	SCALE:	SHEET:
	2009/06/23	F.Z.ZHANG	唐建平	冯显东	Pitch 2.54*H1.50mm Pin Header Single Row Straight Type, A=3.0, B=9.0	N/A	N/A	QH1151PA54	2:1	1/1

A B C D 6 5 4 3 2 1